
Rocker Switch | SRB3-1D-DC-1-RGL


SWITCH COMPONENTS

Mechanical Dimensions: Inches [mm]

Tolerances ±0.012 [0.3] Unless Otherwise Specified

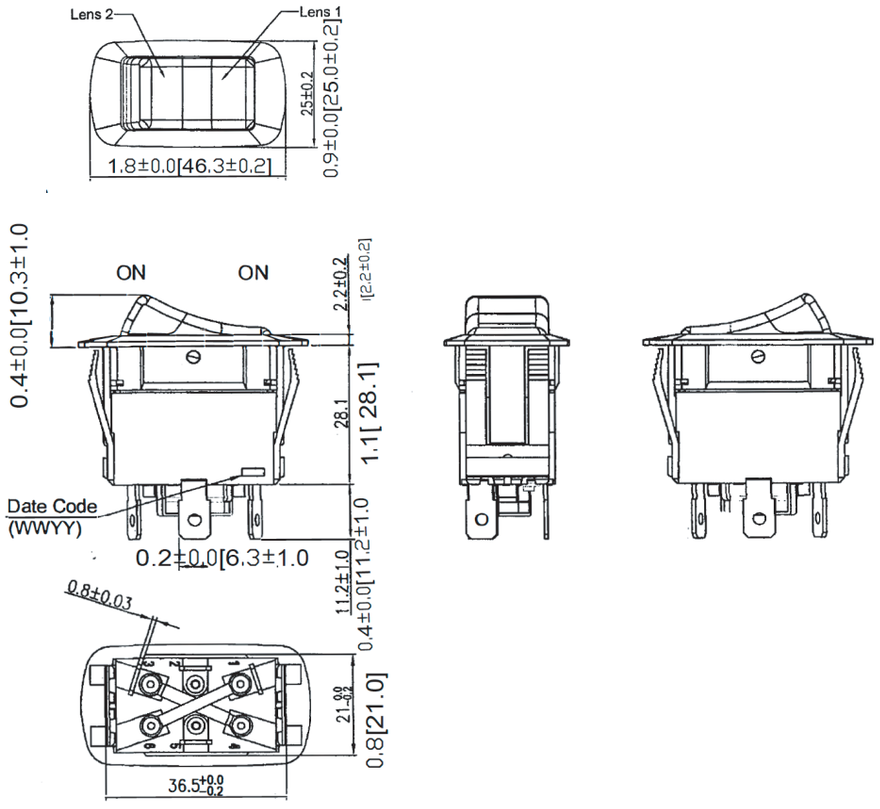


Mounting Hole

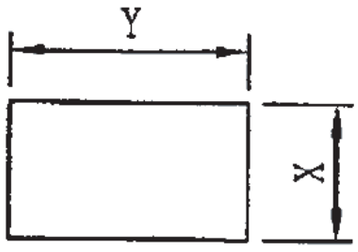

Thickness: 0.0~1.1 [0.75~30 .0]max

Circuit Diagram



Electrical Specifications

Rating	21A 14V DC
Contact Resistance	50m ohm Max
Insulation Resistance	DC 500V 100M ohm Min
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-20°C ~ 85°C

Material Specifications

Frame	Black, Nylon 66
Lamp	Bulb 1: Red, 2: Green
Lens	Lens 1: Red. Lens 2: Green
Actuator	Black, Nylon 66 +33%GF

Rocker Switch

SRB3-1D-DC-1-RGL

SWITCH COMPONENTS

Rev	Date of issue	Revision Notes	Designed	Approved
A	02-28-2019	Initial Drawing	RC	OH

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

PD-1E-DC-9-UL SRD2-1G-DC-1-BNN TA2-1A-DC-5 TE3-1A-DC-1-AL TE1-1F-DC-1-PB PB-1A-DC-2-B PB-1A-DC-2-RDL RF1-1A-DC-2-B-3 TC6-P1-Z SRA1-1A-DC-1-NN-2 SRD2-2F-DC-1-RNN SB-1B-DC-3-B SRD1-2A-DC-1-BGN TA1-1A-DC-4 TA2-1G-DC-6-O WR1 PB-1B-DC-2-RIL RC-1A-DC-1-AL SB-1B-DC-3-R SRB1-1G-DC-1-NN RA4-2A-DC-2-AL RD2-1A-DC-1-AL RF3-1A-DC-2-GL SRD2-2F-DC-1-BNN TB1-2H-DC-6 TE6-1A-DC-1-UL RG3-1A-DC-1-B SC-B SRA1-2F-DC-1-NN SRC1-1B-DC-1-B