


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.07.01	阿树

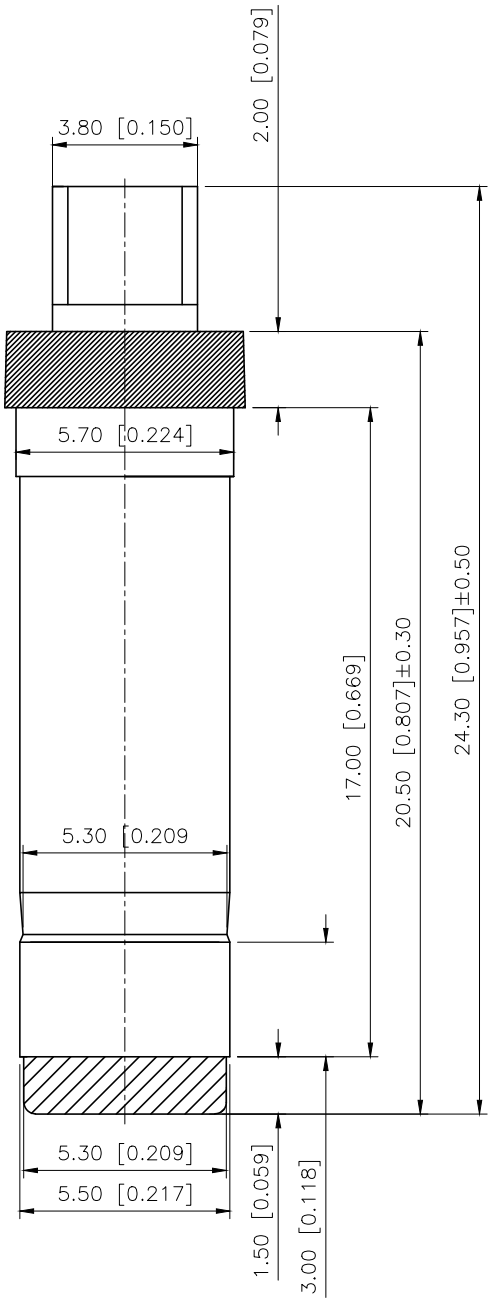

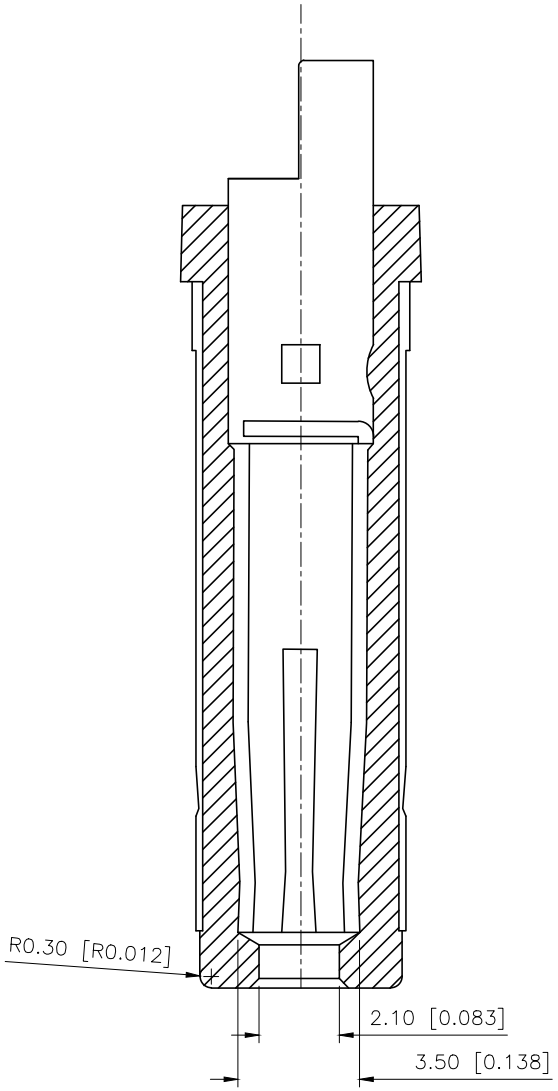

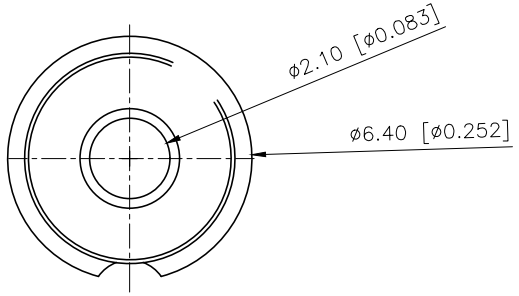

SPECIFICATION
1.Rating : DC 20V 15A;
2.Contact resistance: ≤0.03Ω;
3.Insulation resistance: ≥100MΩ (DC500V);
4.Withstand voltage: 500VAC ;
5.Insertion and extraction force: 3-30N;

No.	DESCRIPTION	QTY	MATERAL	PLATING
1	Copper pipe	1	Brass	Ni
2	O-terminal	1	Phosphor copper	Ni
3	Insulators	1	LCP	-

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB Connection 星创

DESIGN	阿树	VIEW:	MODEL TYPE: DC PIUG
CHECKED		UNIT: mm/in	PART NO.: DT-2155243
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XKB Connection:

X6521WV-2x30H-C60D30 X9357WV-2x04HN-N2SN X0400FVS-16-LPV01 X6511WV-12H-C60D30
X6521WR-2x02H-C60D30 TC-1103-C-Y X2026WV-2x03-N0SN X8821HM-03L-N0 TS-1102S-A-I-B
X05A10L10G X05A26H35G X1321WV-2x13J-C30D23 X1321WVS-2x25J-C40D53 X2081WR-2X06-N0SN
TS-1103S-B-J X1321FV-2x12-C43D24 X1506WVS-04-9TSW X1002WVS-10E-LPSWHF
X2026WV-2x04D-46SN X4611WR-01I-C40D28 X9357WR-2x09-N2SN X9357WR-2x12-N2SN
X2009WVS-02-9TSW X2016WVS-04-9TSW X4621WVS-2x15I-C40D64 X9812WVS-2x15-6TV01
TC-1101T-C-B-B X1011H-2x25-N0HF X1506H-10-PT X6521FV-2x22-C85D32