


由 Autodesk 教育版产品制作


MAPX	MODIFICATION	DATE

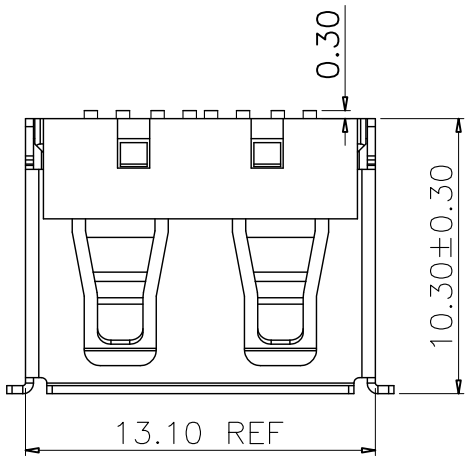

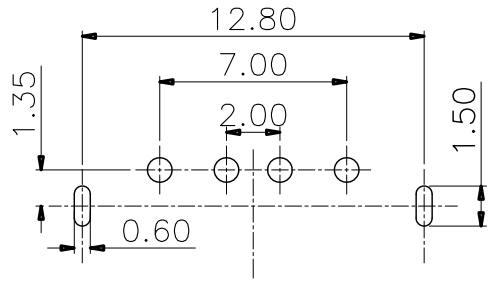

PCB HOLES(THE PATTERN SIDE)
NOTE: GENERAL TOLERANCE: ±0.1mm

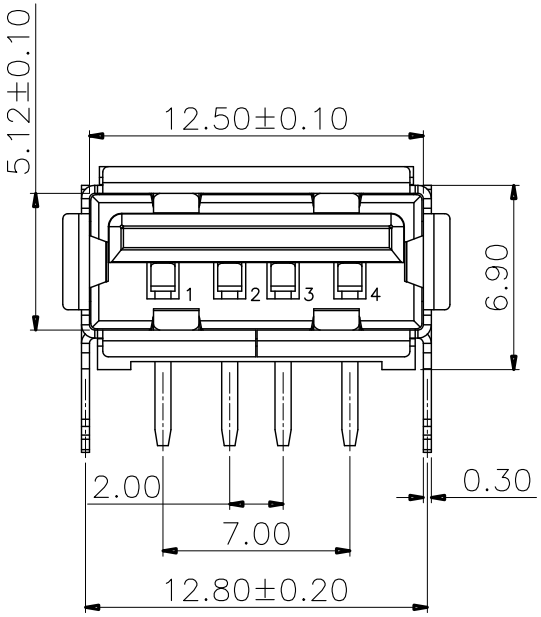

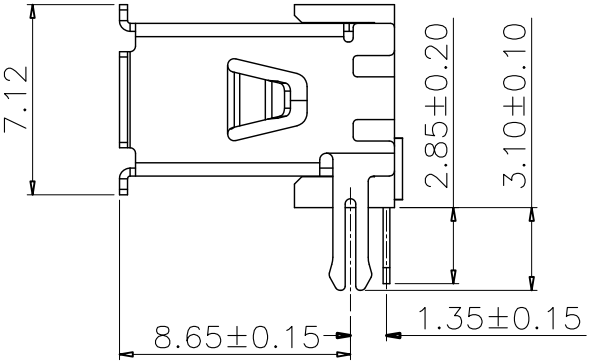

NOTES:
1. HOUSING: SEE NOTES,
   TERMINAL: SEE NOTES.
   SHELL: SEE NOTES.

SPECIFICATION:
1. ELECTRICAL CHARACTERISTIC:
   CONTACT RESISTANCE: 30MΩ MAX
   DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
   INSULATION RESISTANCE: 1000MΩ MIN
2. MECHANICAL CHARACTERISTIC:
   INSERTION FORCE: 35N(3.57KGF) MAX
   EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
   DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
   5000 CYCLES MIN
   5000 CYCLES EXTRACTION FORCE:3~35N
3. ENVIRONMENTAL:
   OPERATING TEMPERATURE: -55℃+85℃
4. Contact finish:
   01:Selective Gold Flash
   02:Selective Gold 3U″
   03:Selective Gold 5U″
   04:Selective Gold 15U″
   05:Selective Gold 30U″

产品图 PRODUCT CHART DWG			
公差一览表 TOLERANCE UNLESS OTHERWISE			
X	±0.15	X	±5.°
.X	±0.10	.X	±2.°
.XX	±0.05	.XX	±1.°
.XXX	±0.03	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	USB A/F 10.0-B-004
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	USB A/F 10.0（后两脚有边）
日期 DATE	2010.05.06	核准 APPD		角法 VIEW	版本 VER A0

由 Autodesk 教育版产品制作

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

918-415K3028S40000 920-F52A2021S10105 911-221A2021S10100 920-C52A2021S10105
916-151A1022Y10200 920-154A2021Y10110 920-A62A2021S10104 912-112A1011D10100
912-112A2021S10100 918-318K2023C40005 905-761A2032S10200 919-162A1012D10400
907-312A1101Y10210 908-351A1011D10100 920-A64A2091S101A3 904-232A2031S10100
912-312A1012D10100 918-418K2022Y40011 920-C62A2021S10103 906-262A1021D10200
906-552A1012D10200 910-151A2021D10100 917-B88C201AH70201 918-468K2029Y50000
920-A62A2021S10108 904-232B2032S10100 904-331B2032S10200 906-752B1114D10200
907-111A1022D10200 917-P81A202ES60201