

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	25JUN2015	DW	CW

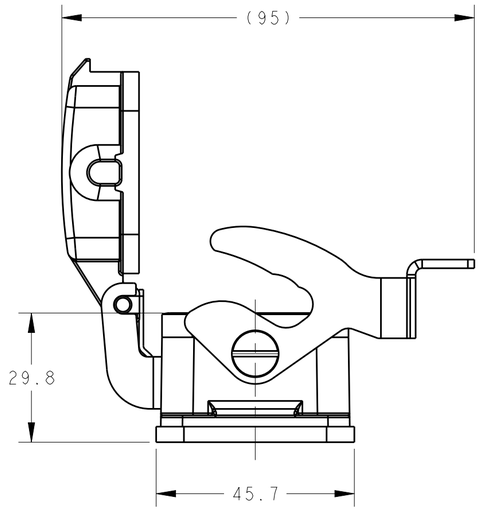


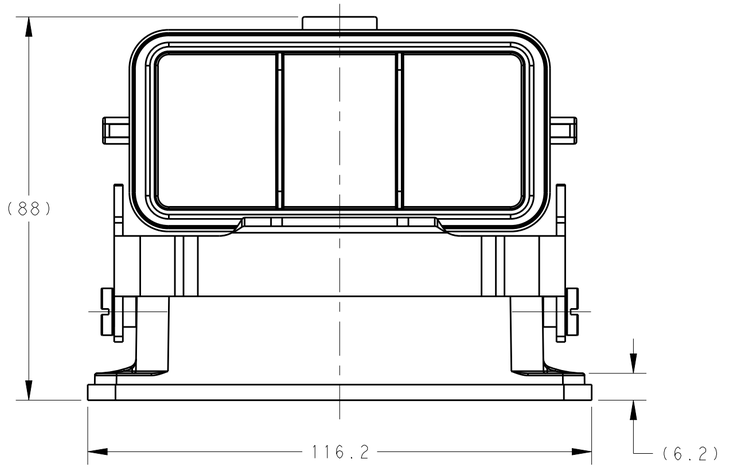


NOTES:
1. TECHNICAL CHARACTERISTICS:
   HOUSING MATERIAL: DIE CAST ALUMINIUM ALLOY
   SURFACE: POWDER COATED, GREY
   OPERATION TEMPERATURE: -40-+125°C
   DEGREE OF PROTECTION: IP65 (MATED)

注释：
1. 技术参数：
   下壳材料： 铝合金
   表面处理： 粉末涂层，灰色
   工作温度： -40-+125°C
   防护等级： IP65(配合)

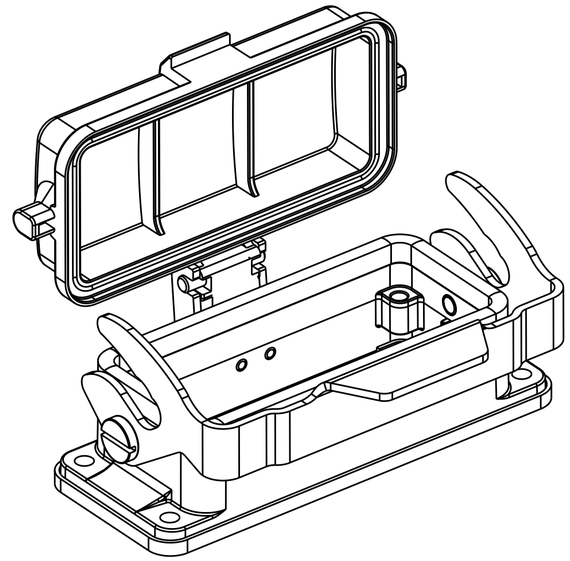

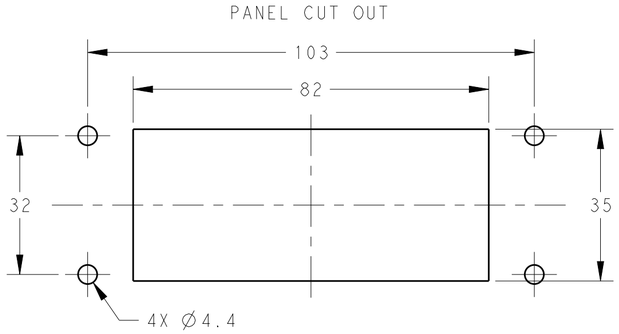

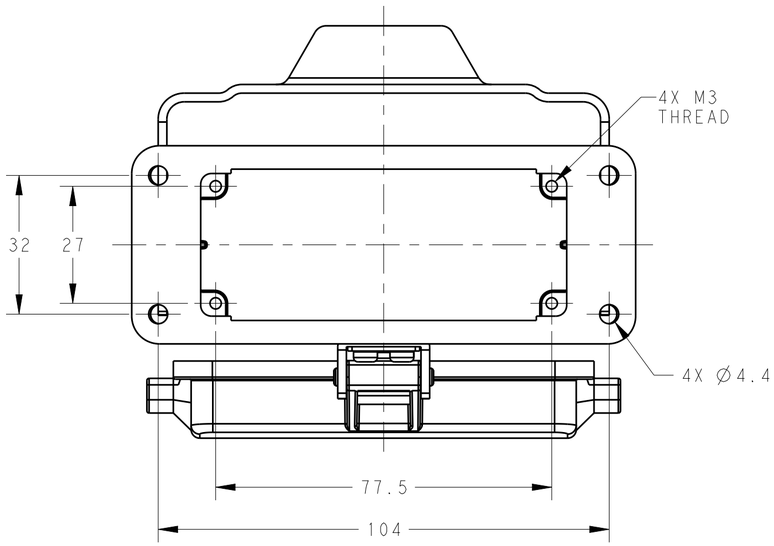

T1510163000-000	H16B-AD-LB
PART NUMBER	DESCRIPTION

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL -
FINISH -

DWN David Wang 25JUN2015
CHK Chris Wang 25JUN2015
APVD Xiang Xu 25JUN2015
PRODUCT SPEC 108-137013
APPLICATION SPEC 114-137013
WEIGHT -

TE Connectivity

NAME H16B-AD-LB

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-T1510163000000	-

Customer Drawing | SCALE 1:1 | SHEET 1 OF 1 | REV A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1-962915-1 1743455-2 2005330-1 SMW73R0JT TE50BR39J U5254-000005-030PA 1969656-1 936348-1 2-292161-3 2310537-1 650075-000 CRGCQ2010J3K3 1393431-1 141991-2 2834055-1 MPT100C18RF SBCHE64R7K 1-794222-0 1903112-2 2377783-2 3-1393225-0 ROX05SJ18R SBCHE154R7K 2380312-2 917696-1 CPF0402B37K4E1 RH73H2A40MKTN 175977-2 3430B2F51RTDF 3631B101LL