Thank you for your interest in **onsemi** products.

Your technical document begins on the following pages.

Your Feedback is Important to Us!

Please take a moment to participate in our short survey.
At **onsemi**, we are dedicated to delivering technical content that best meets your needs.

Help Us Improve – Take the Survey

This survey is intended to collect your feedback, capture any issues you may encounter, and to provide improvements you would like to suggest.


We look forward to your feedback.

To learn more about **onsemi**, please visit our website at
www.onsemi.com

onsemi and onsemi and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi** product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.

Silicon Carbide (SiC) Module – EliteSiC Power Module for Traction Inverter, Single-Side Cooling, 2.6 mohm, 1200 V, Half-Bridge, 90° Power Tabs

NVVR26A120M1WST

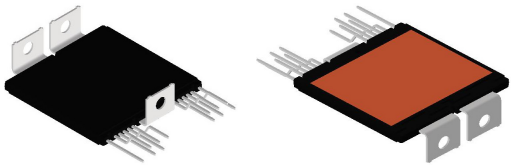

AHPM15−CDA MODULE
CASE MODHG

Product Description

The NVVR26A120M1WST is part of the EliteSiC power module for traction inverter, a revolutionary high mobility compound semiconductor product family that offers increased performance, better efficiency, and higher power density in similar and highly compatible packaging solutions. The module integrates 1200 V SiC MOSFET in a half−bridge configuration. To enhance reliability and thermal performance, sintering technology is applied for die attach. The module is designed to meet the AQG324 standard.


Features

- Ultra Low $R_{DS(on)}$
- Aluminum Nitride Isolator
- Ultra−low Stray Inductance ~ 7.1 nH
- $T_{vj.Max}$ = 175°C for Continuous Operation
- Automotive Grade SiC MOSFET Chip Technologies
- Sintered Die Technology for High Reliability Performance
- Automotive Module AQG324 Compliant
- PPAP Capable

Applications


- Automotive EV/HEV− Traction Inverter

MARKING DIAGRAM

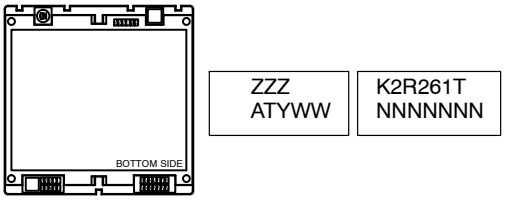

ZZZ	= Assembly Lot Code
K2R261T	= Marking Value
AT	= Assembly & Test Location
Y	= Year
WW	= Work Week
NNNN	= Serial Number

PIN CONFIGURATION

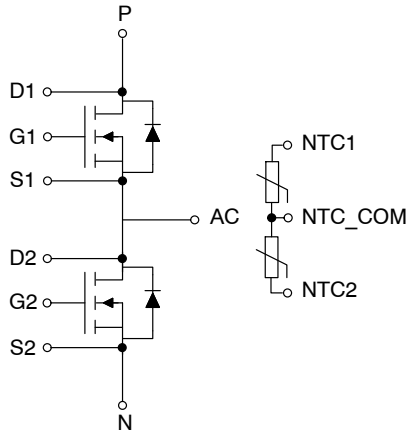

ORDERING INFORMATION

Device	Package	Shipping
NVVR26A120M1WST	A1HPM	Tube

© Semiconductor Components Industries, LLC, 2021

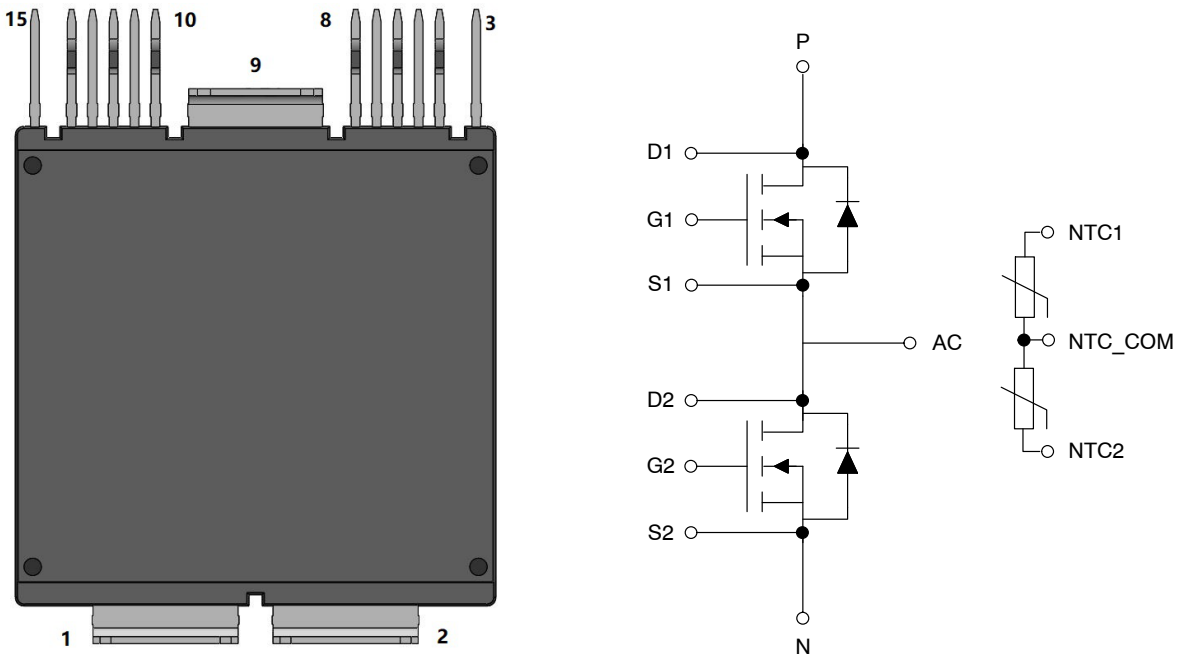


Figure 1. Pin Description

PIN FUNCTION DESCRIPTIONS

Pin No.	Pin Name	Pin Functional Description
1	N	Negative Power Terminal
2	P	Positive Power Terminal
3	D1	High Side MOSFET (Q1) Drain Sense
4	N/C	No Connection
5	S1	High Side MOSFET (Q1) Source
6	G1	High Side MOSFET (Q1) Gate
7	N/C	No Connection
8	N/C	No Connection
9	AC	Phase Output
10	NTC1	NTC 1
11	S2	Low Side MOSFET (Q2) Source
12	G2	Low Side MOSFET (Q2) Gate
13	NTC2	NTC 2
14	NTC_COM	NTC common
15	D2	Low Side MOSFET (Q2) Drain Sense

Materials

DBC Substrate: AlN isolated substrate, basic isolation, and copper on both sides
Lead frame: Copper, with tin electro−plating

Flammability Information

All materials present in the power module meet UL flammability rating class 94V−0

MODULE CHARACTERISTICS (T_{vj} = 25°C, Unless Otherwise Specified)

Symbol	Parameter	Rating	Unit
T_{vj}	Operating Junction Temperature	−40 to 175	°C
T_{STG}	Storage Temperature Range	−40 to 125	°C
V_{ISO}	Isolation Voltage (AC, 50 Hz, 5 s)	4200	V
Ls_{DS}	Stray Inductance	7.1	nH
$R_{DD'+SS'}$	Module Lead Resistance, Terminal to Chip	0.3	mΩ
G	Module Weight	48	g
CTI	Comparative Tracking Index	>600	–
Creepage	Minimum: Terminal to Terminal	5.0	mm
Clearance	Minimum: (Note 1) Terminal to Terminal	3.2	mm
M	M5 DIN 439B Screws for Module Terminals, Max. Torque	2.2	Nm

1. Verified by design/characterization, not tested.

ABSOLUTE MAXIMUM RATINGS (T_{vj} = 25°C, Unless Otherwise Specified)

Symbol	Parameter	Rating	Unit
V_{DS}	Drain−Source Voltage	1200	V
V_{GS}	Gate−Source Voltage	+25/−10	V
I_{DS}	Continuous DC Current, V_{GS} = 20 V, T_{vj} = 175°C, T_F = 65°C @ 10LPM, using Ref. Heatsink (Note 2)	400	A
$I_{DS.pulsed}$	Pulsed Drain−Source Current, V_{GS} = 20 V, limited by $T_{vj.Max}$	800	A
$I_{SD.BD}$	DC Current in Body Diode, V_{GS} = −5 V, T_{vj} = 175°C, T_F = 65°C @ 10LPM, using Ref. Heatsink (Note 2)	270	A
$I_{SD.pulsed}$	Pulsed Body Diode Current, V_{GS} =−5 V, limited by $T_{vj.Max}$	800	A
Ptot	Total Power Dissipation $T_{vj.Max}$ = 175°C, T_F = 65°C, Ref. Heatsink (typ)	1000	W

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

2. Verified by design / not by test.

MOSFET CHARACTERISTICS (T_{vj} = 25°C, Unless Otherwise Specified)

Parameter		Conditions		Min	Typ	Max	Unit
$R_{DS(ON)}$	Drain−to−Source On Resistance (Terminal)	V_{GS} = 20V, I_D = 400A	T_{vj} = 25°C T_{vj} = 175°C	–	2.6 4.6	–	mΩ
$V_{GS(TH)}$	Gate Threshold Voltage	V_{GS} = V_{DS} , I_D = 150 mA		2.1	3.2	–	V
g_{fs}	Forward Transconductance	V_{DS} = 10 V, I_D = 400 A		–	170	–	S
Q_G	Total Gate Charge	V_{GS} = −5/+20 V, V_{DS} = 800 V, I_D = 400 A		–	1.75	–	μC
$R_{g.int}$	Internal Gate Resistance			–	2.1	–	Ω
C_{iss}	Input Capacitance	V_{DS} = 800 V, V_{GS} = 0 V, f = 100 kHz		–	31.7	–	nF
C_{oss}	Output Capacitance			–	2.2	–	nF
C_{rss}	Reverse Transfer Capacitance			–	0.22	–	nF
I_{DSS}	Zero Gate Voltage Drain Current	V_{GS} = 0 V, V_{DS} = 1200 V	T_{vj} = 25°C T_{vj} = 175°C	–	– 13.1	250 –	μA
I_{GSS}	Gate−Source Leakage Current	V_{GS} = 20/−5 V, V_{DS} = 0 V				±700	nA
$T_{d.on}$	Turn On Delay, Inductive Load	I_{DS}= 400 A, V_{DS} = 800 V, V_{GS} = +20/−5 V, Rg.on = 3 Ω	T_{vj} = 25°C T_{vj} = 175°C	–	125 115	–	ns
T_r	Rise Time, Inductive Load	I_{DS} = 400 A, V_{DS} = 800 V, V_{GS} = +20/−5 V, Rg.on = 3Ω	T_{vj} = 25°C T_{vj} = 175°C	–	59 54	–	ns
$T_{d.off}$	Turn Off Delay, Inductive Load	I_{DS} = 400 A, V_{DS} = 800 V, V_{GS} = +20/−5 V, Rg.off = 1 Ω	T_{vj} = 25°C, T_{vj} = 175°C	–	220 228	–	ns
T_f	Fall Time, Inductive Load	I_{DS} = 400 A, V_{DS} = 800 V, V_{GS} = +20/−5 V, Rg.off = 1 Ω	T_{vj} = 25°C T_{vj} = 175°C	–	51 61	–	ns
E_{ON}	Turn−On Switching Loss (including diode reverse recovery loss)	I_{DS} = 400 A, V_{DS} = 800 V, V_{GS} = +20/−5 V, Ls = 17 nH, Rg.on = 3Ω	di/dt = 8.4 A/ns, T_{vj} = 25°C di/dt = 9.7 A/ns, T_{vj} = 175°C	–	26 28	–	mJ
E_{OFF}	Turn−Off Switching Loss	I_{DS} = 400A, V_{DS} = 800 V, V_{GS} = +20/−5 V, Ls =17 nH, Rg.off = 1 Ω	dv/dt = 19.8 V/ns, T_{vj} = 25°C dv/dt = 16.8 V/ns, T_{vj} = 175°C	–	14 17	–	mJ
E_{sc}	Short Circuit Energy Withstand	V_{GS} = 20 V, V_{DS} = 800 V	T_{vj} = 25°C T_{vj} = 175°C	–	12 11	–	J

BODY DIODE CHARACTERISTICS (T_{vj} = 25°C, Unless Otherwise Specified)

Parameters		Conditions		Min	Typ	Max	Unit
V_{SD}	Diode Forward Voltage (Terminal)	V_{GS} = −5 V, I_{SD} = 400 A	T_{vj} = 25°C T_{vj} = 175°C	–	3.8 3.3	–	V
E_{rr}	Reverse Recovery Energy	I_{SD} = 400 A, V_R = 800 V, V_{GS} = −5 V, Ls = 17 nH, Rg.on = 3 Ω	di/dt = 8.4 A/ns, T_{vj} = 25°C di/dt = 9.7 A/ns, T_{vj} = 175°C	–	0.4 2.1	–	mJ
Q_{RR}	Recovered Charge	I_{SD} = 400 A, V_R = 800 V, V_{GS} = −5 V, Rg.on = 3 Ω	T_{vj} = 25°C T_{vj} = 175°C	–	2.3 8.6	–	μC
I_{RR}	Peak Reverse Recovery Current	I_{SD} = 400 A, V_R = 800 V, V_{GS} = −5 V, Rg.on = 3 Ω	T_{vj} = 25°C T_{vj} = 175°C	–	527 650	–	A

NTC SENSOR CHARACTERISTICS (T_{vj} = 25°C, Unless Otherwise Specified)

Parameters		Conditions	Min	Typ	Max	Unit
R25	Rated Resistance	Tc = 25°C	–	10	–	kΩ
ΔR/R	Deviation of R100	Tc = 100°C, R100 = 877 Ω	−3	–	+3	%
P25	Power Dissipation	Tc = 25°C	–	–	125	mW
B25/85	B−Value	R = R25 exp [B25/85 (1/T−1/298)]	−1%	3610	+1%	K

THERMAL CHARACTERISTICS

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$R_{th,J-C}$	FET Junction to Case		–	0.025	0.028	°C/W
$R_{th,J-F}$	FET Junction to Fluid	R_{th}, Junction to Fluid, 10 L/min, 65°C, 50/50 EGW, Ref. Heatsink	–	0.11	–	°C/W

TYPICAL CHARACTERISTICS

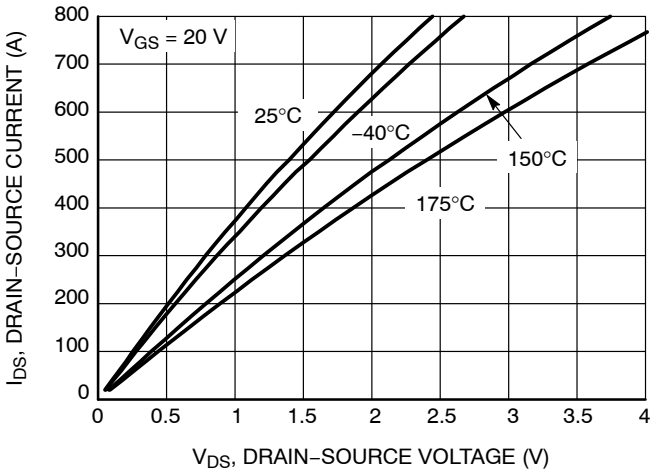


Figure 2. Output Characteristics

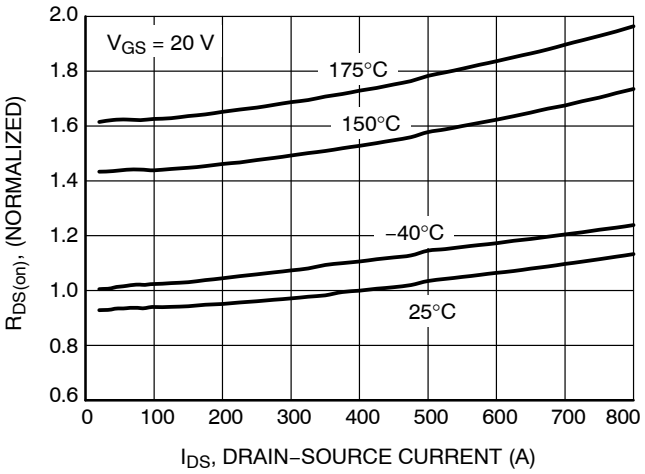


Figure 3. Normalized On−state Resistance vs. Drain Current

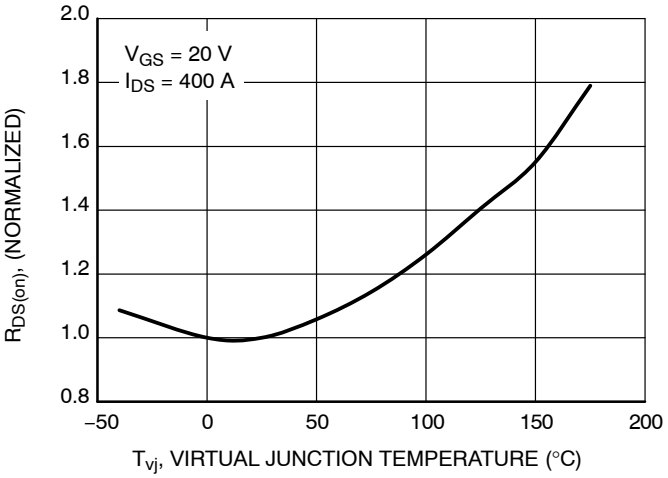


Figure 4. Normalized On−state Resistance vs. Temperature

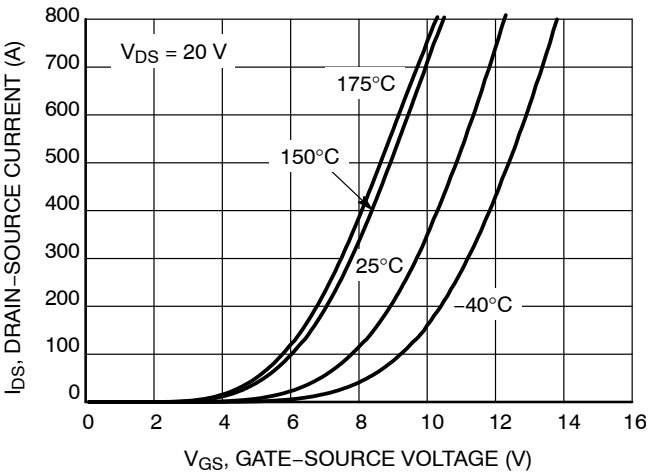


Figure 5. Transfer Characteristic

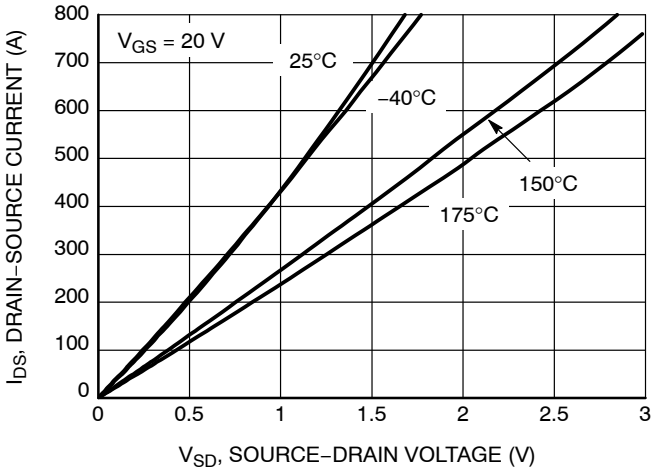


Figure 6. 3rd Quadrant Characteristic at V_{GS} = 20 V

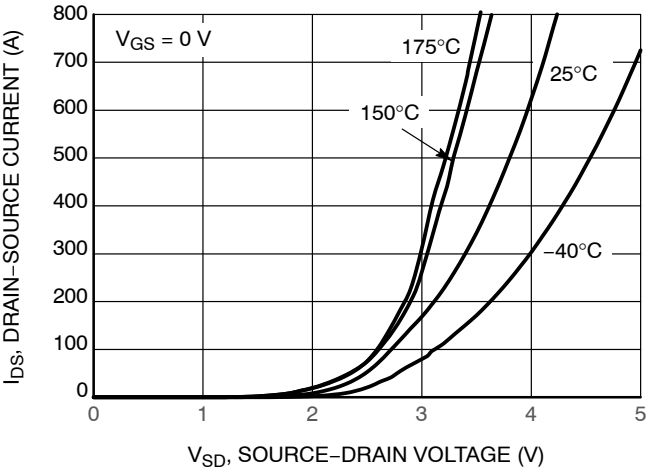


Figure 7. 3rd Quadrant Characteristic at V_{GS} = 0 V

TYPICAL CHARACTERISTICS

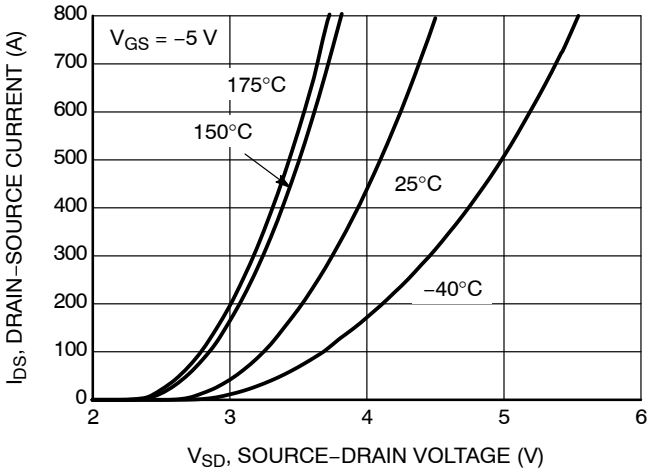


Figure 8. 3rd Quadrant Characteristic at V_{GS} = −5 V

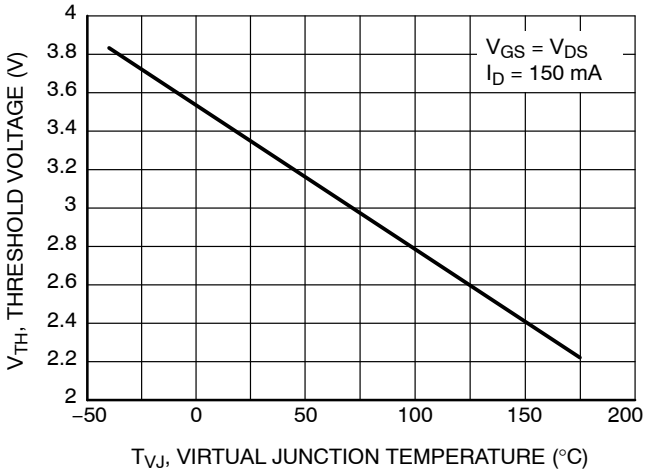


Figure 9. Gate Threshold Voltage vs. Temperature

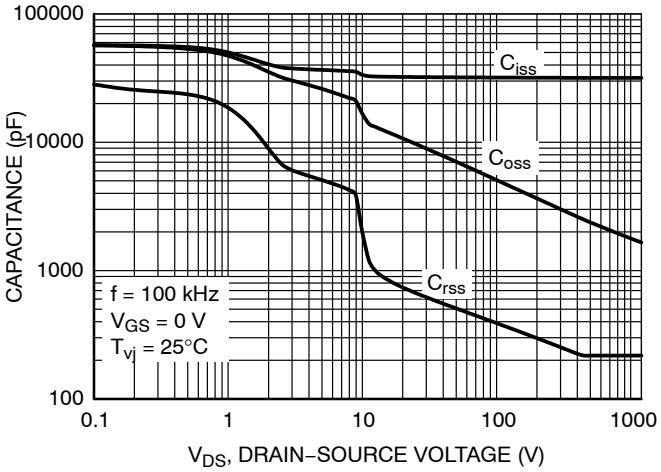


Figure 10. Typical Capacitance vs. Drain−Source Voltage

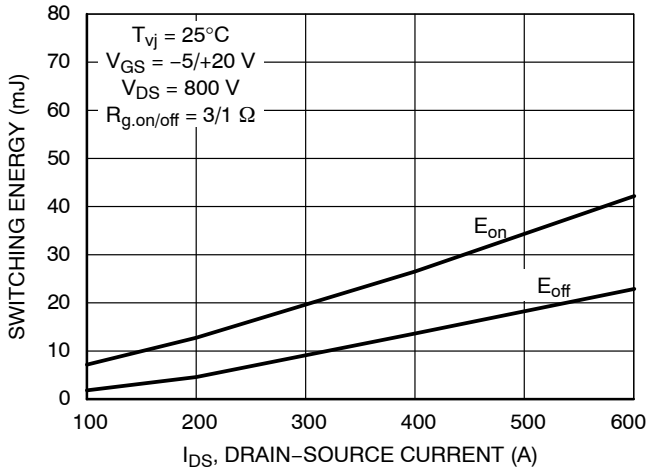


Figure 11. Switching Energies at 25°C

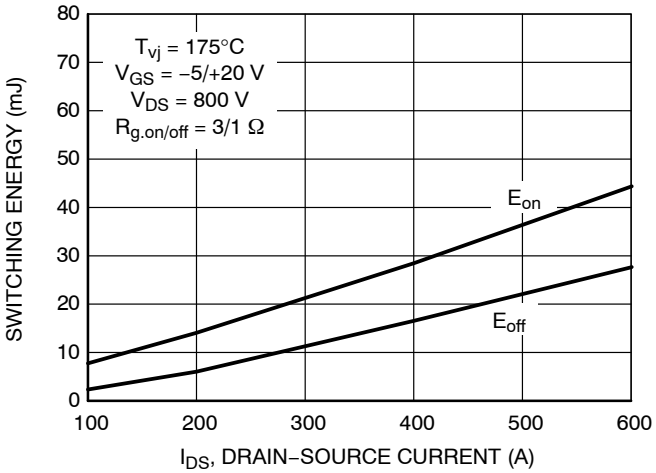


Figure 12. Switching Energies at 175°C

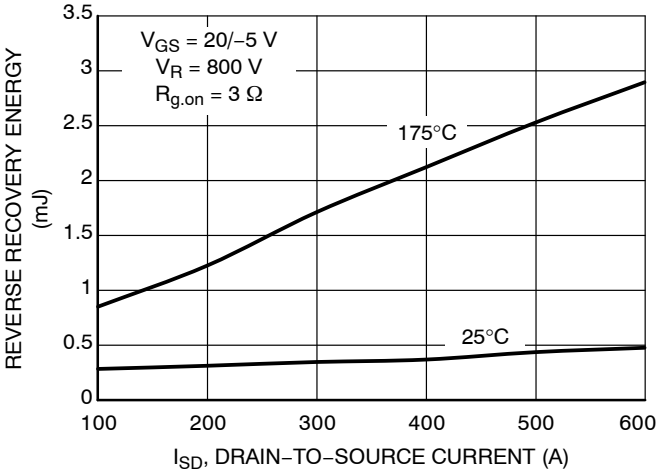


Figure 13. Reverse Recovery Energy vs. Drain−Source Current

TYPICAL CHARACTERISTICS

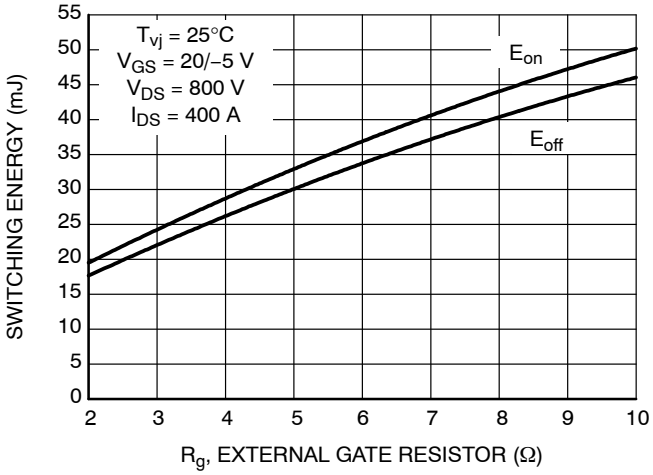


Figure 14. Switching Energies vs. External Gate Resistor

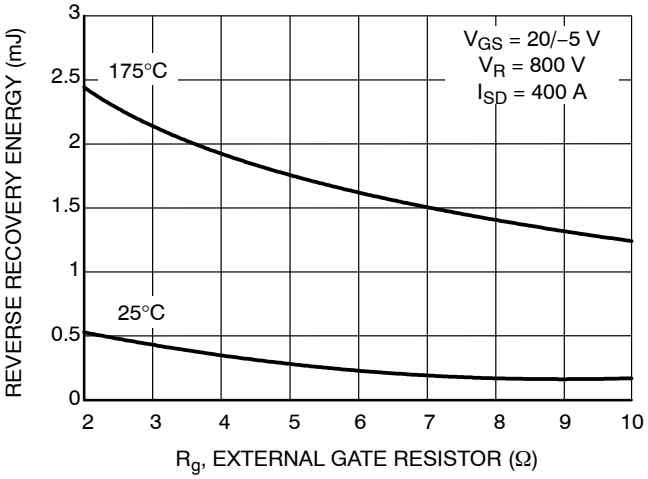


Figure 15. Reverse Recovery Energy vs External Gate Resistor

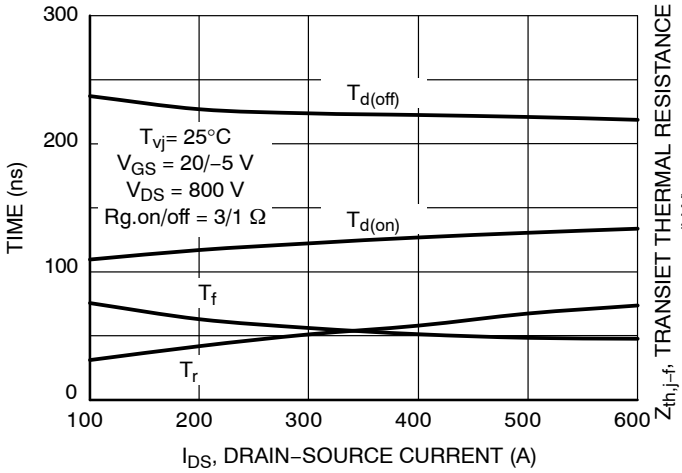


Figure 16. Timing Characteristics vs. Drain−Source Current

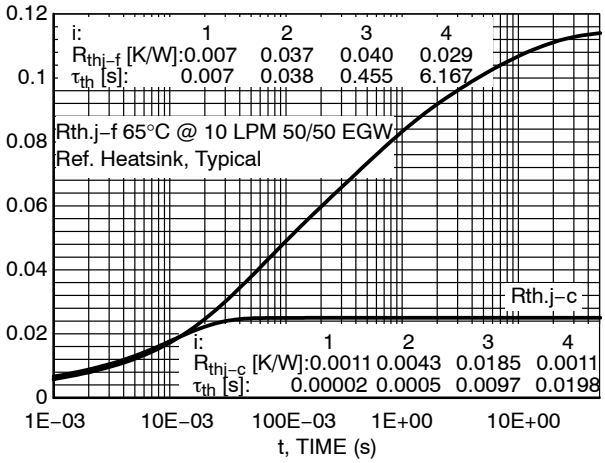


Figure 17. Typical Thermal Impedance

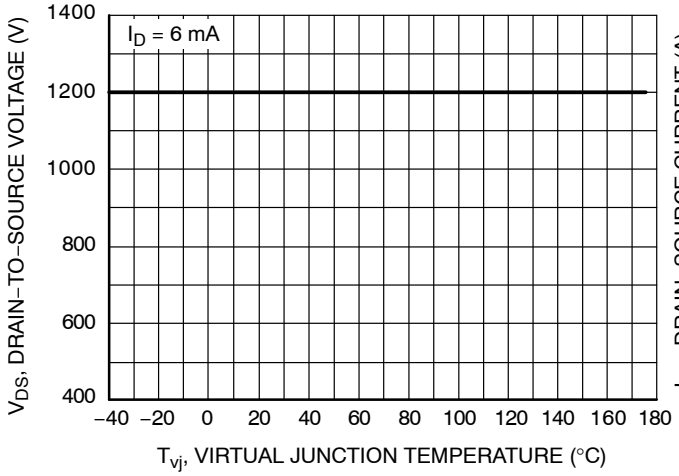


Figure 18. MOSFET Breakdown Voltage vs. T_{VJ}

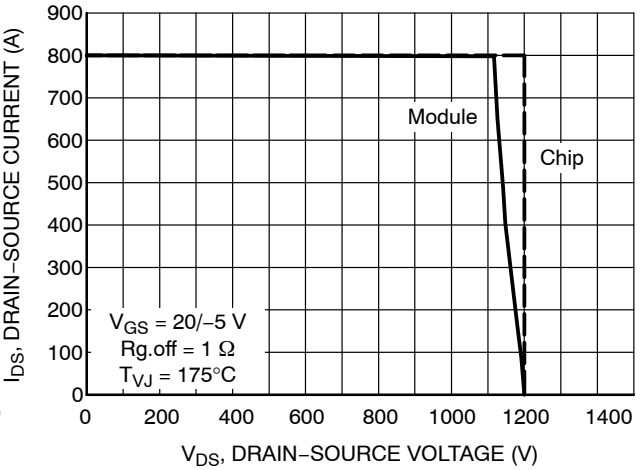


Figure 19. MOSFET RBSOA of Chip and Module

TYPICAL CHARACTERISTICS

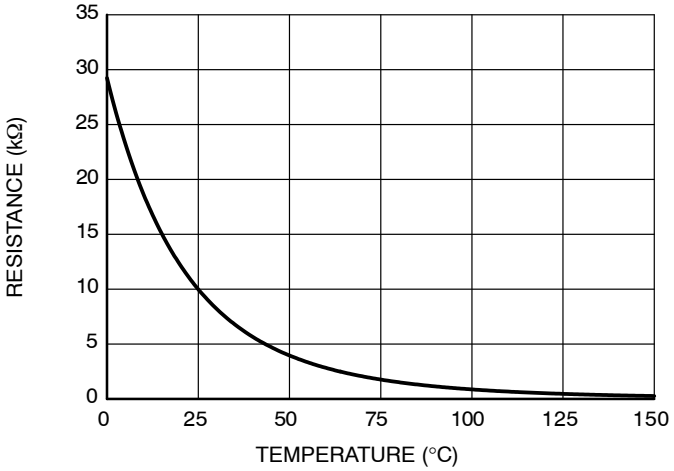


Figure 20. NTC Resistance vs. Temperature



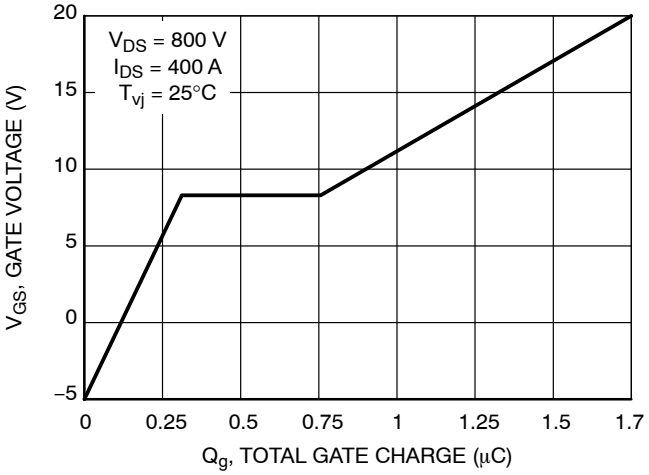


Figure 21. Gate Charge vs. Gate−Source



AHPM15−CDA MODULE
CASE MODHG
ISSUE B


DATE 22 SEP 2021

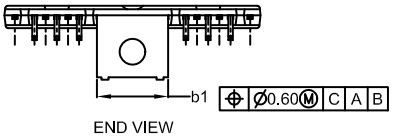


END VIEW

NOTES:


1. DIMENSIONING AND TOLERANCING PER. ASME Y14.5M, 2009.
2. CONTROLLING DIMENSION: MILLIMETERS
3. DIMENSIONS D & E DO NOT INCLUDE MOLD PROTRUSIONS
4. DIMENSIONS b,b1,b2 DO NOT INCLUDE DAMBAR REMAIN.
5. MARKING AREA.

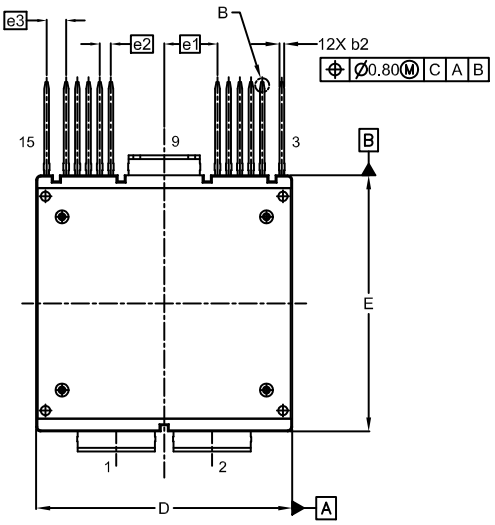


TOP VIEW

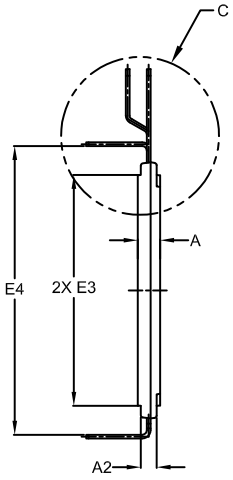


SIDE VIEW

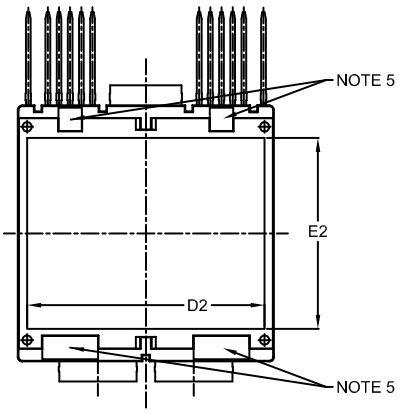


BOTTOM VIEW



DETAIL B

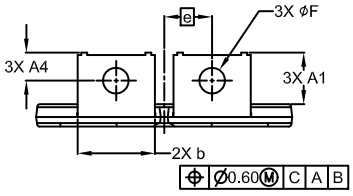

END VIEW

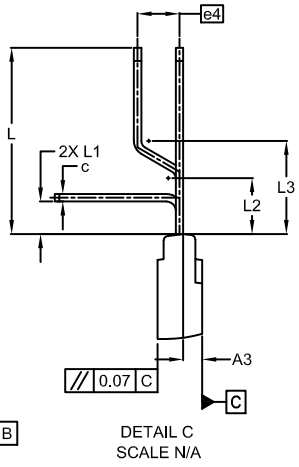

DETAIL C
SCALE N/A

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	4.60	4.80	5.00
A1	10.75	11.05	11.35
A2	3.20	3.40	3.60
A3	1.70	2.05	2.40
A4	5.70	6.00	6.30
b	16.50	16.60	16.70
b1	15.20	15.30	15.40
b2	0.90	1.00	1.10
b3	0.50 REF		
c	0.70	0.80	0.90
D	54.80	55.00	55.20
D2	50.40	51.00	51.60

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
E	54.80	55.00	55.20
E2	40.40	41.00	41.60
E3	49.40	49.60	49.80
E4	61.50	62.00	62.50
e	10.00	10.30	10.60
e1	11.15	11.45	11.75
e2	2.40 BSC		
e3	4.20 BSC		
e4	4.20	4.50	4.80
F	5.40	5.50	5.60
L	19.60	20.00	20.40
L1	3.10	3.50	3.90
L2	6.00 REF		
L3	10.00 REF		
M	10° REF		


onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2018

AHPM15−CDA MODULE
CASE MODHG
ISSUE A

DATE 22 SEP 2021

GENERIC
MARKING DIAGRAM*

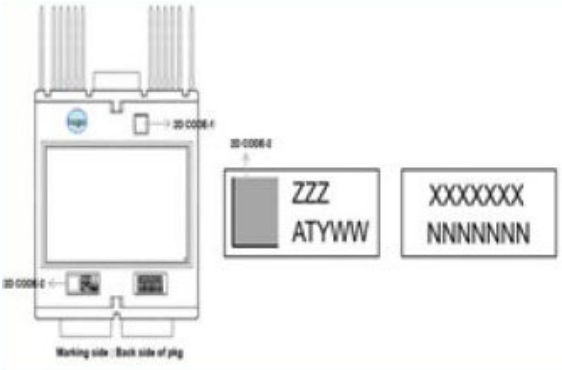

ZZZ = Assembly Lot Code
AT = Assembly & Test Location
Y = Year
WW = Work Week
NNNN = Serial Number

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “▪”, may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	**98AON23821H**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.	
DESCRIPTION:	**AHPM15−CDA MODULE**		**PAGE 2 OF 2**

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2018

onsemi, , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ON Semiconductor:

NCV20072DR2G NTS2101PT1G SVC704-TL-E 1N4749ATR 74ABT541CMTC ESD9X7.0ST5G LM2901MX MMSZ5255BT1G NCV7344AD10R2G QT7810X 74LCX244WM MMVL2101T1G RB751V40T1G MC74LVX244DWR2G MC7815CTG SBAT54CWT1G-M02 CAV25M01YE-GT3 FDMC86261P FOD3120SDV MVMBF0201NLT1G NCV431BSNT1G NL17SZ126DFT2G NTS4101PT1G 1N5344BRLG BAS19LT3G CAT823TTDI-GT3 FDMS86202 FAN3229TMX-F085 MC14538BDTR2G MC34161DG