



ROHS

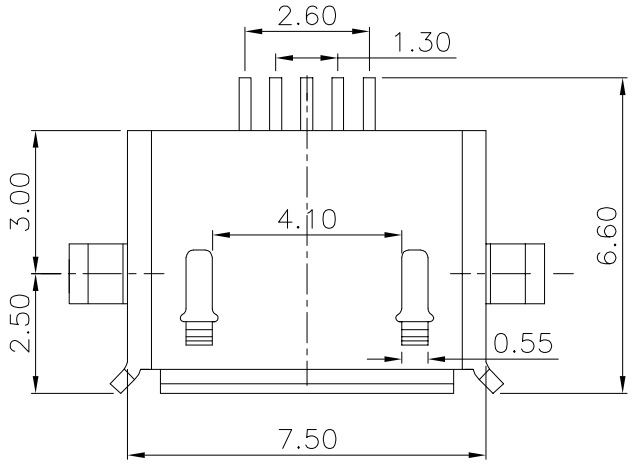

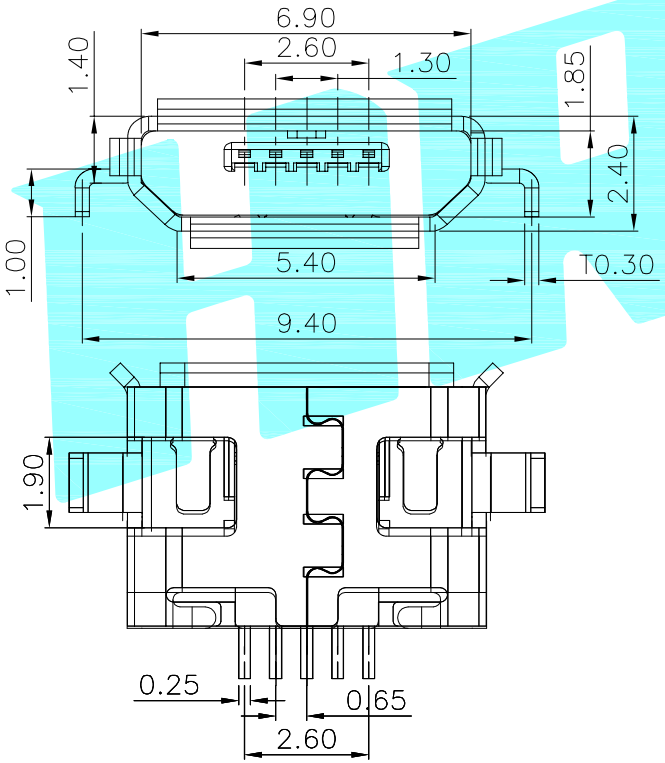

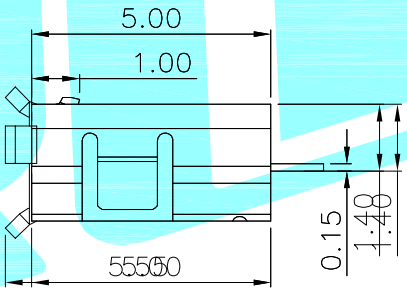

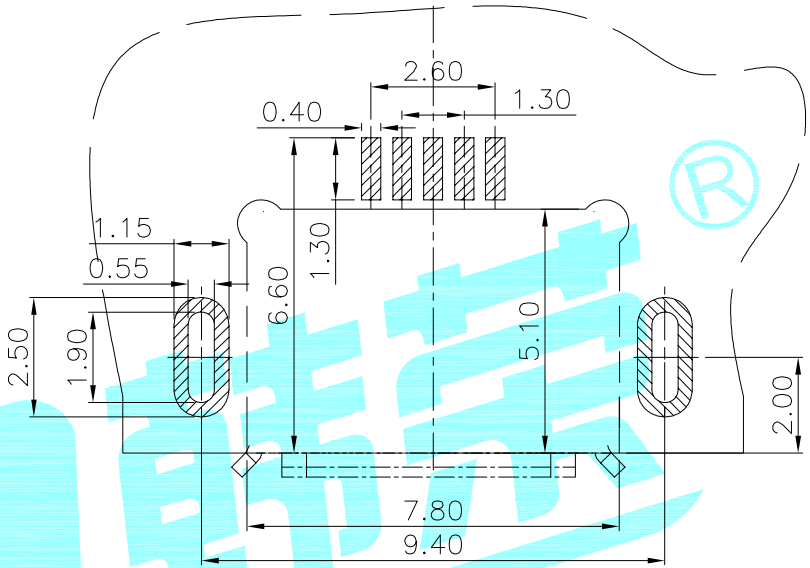

Recommended PCB Layout

SPECIFICATIONS

1.RATING: DC30V 1.0A
2.MECHANICAL LIFE: 5,000 CYCLES.
3.PACKAGING: 1000PCS/REEL

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
③	Shell	——	1	Phosphor Bronze	Plated	————
②	Contact	——	5	C2680R-H	Au Plated	————
①	Housing	——	1	LCP	Black	————

APPROVALS		DATE	HRO韩荣® ELECTRONICS CO.,LTD	
DRAWN	JKUN.LU	2015.5.29		
CHECKED			TITLE:	USB CONNECTOR
APPROVALS			PART NO.	U-C-M5DW-Y-1
TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.25; 5~10 ±0.20; ~ 5 ±0.15; ANGLE ±2°			UNIT: mm	SCALE: 1:1 PROJ:
			DRAWING NO.	———— SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
————	A	————	NEW	————	————	————

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

K3-2258S-E1 SS-22D03-G4 U-C-M5DW-W-1 K2-1102SP-A5SC-04 DS-01BP K2-1102DP-G4SW-04 K2-1102AT-A4CW-01 U-M-M5DD-W-2 K2-1818DP-A3SW-01 ES-07KP K2-1102DP-S3SW-04 K8-5851D-L1 SIM-08A U-F-M5DD-W-L DC-031A-10A U-F-M5DD-Y-L1 U-F-M5SS-W-5 PJ-3250-5A PJ-399B-6A K3-1346S-F1 DA-10RP DQ-03BP K2-1101DF-A4DW-01 K5-1617SA-01 K2-1102SP-K4SC-04 U-C-M5SS-Y-1 U-F-M5DD-Y-L U-F-M5DS-Y-1 K2-1102BG-I4CW-01 TYPE-C-31-M-04