Pushing Performance
Since 1945

SEK-18 SV MA STD ANG29 RLG 64P PLS4

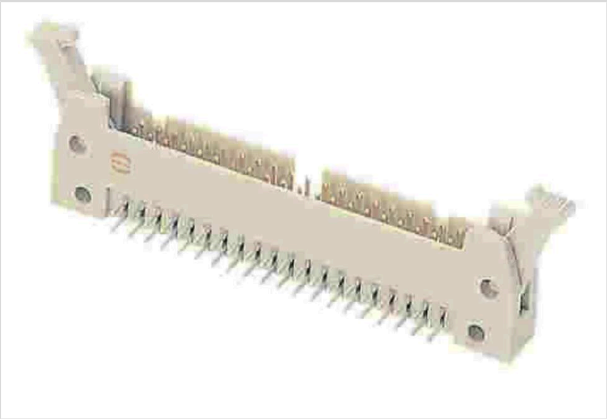


Image is for illustration purposes only. Please refer to product description.

Part number	09 18 564 5903
Specification	SEK-18 SV MA STD ANG29 RLG 64P PLS4
HARTING eCatalogue	https://b2b.harting.com/09185645903

Identification

Category	Connectors
Series	SEK Standard
Element	Male connector
Description of the contact	Angled

Version

Termination method	Wave soldering termination
Connection type	PCB to cable
Number of contacts	64
Termination length	2.9 mm
Locking type	With long levers

Technical characteristics

Contact rows	2
Contact spacing (termination side)	2.54 mm
Rated current	1 A
Insulation resistance	$>10^9$ Ω
Contact resistance	≤20 mΩ
Limiting temperature	-55 ... +125 °C
Insertion force	≤128 N
Withdrawal force	≤128 N
Performance level	NM 30 (S4)
Mating cycles	≥250

HARTING Electronics GmbH | Marienwerderstraße 3 | 32339 Espelkamp | Germany
Phone +49 5772 47-97200 | electronics@HARTING.com | www.HARTING.com

Pushing Performance
Since 1945

Technical characteristics

Test voltage $U_{r.m.s.}$	1 kV
Isolation group	IIIa (175 ≤ CTI < 400)

Material properties

Material (insert)	Thermoplastic resin (PBT)
Colour (insert)	Grey
Material (contacts)	Copper alloy
Surface (contacts)	Noble metal over Ni Mating side Sn over Ni Termination side
Layer thickness	≥0.76 µm
Layer thickness	≥30 µinch
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Yes
California Proposition 65 substances	Antimony trioxide Lead Nickel
Fire protection on railway vehicles	EN 45545-2 (2020-08)
Requirement set with Hazard Levels	R26

Specifications and approvals

Specifications	IEC 60603-13
UL / CSA	UL 1977 ECBT2.E102079 CSA-C22.2 No. 182.3 ECBT8.E102079
Railway classification	F3/I3

Commercial data

Packaging size	50
Net weight	17.9 g
Country of origin	Romania


HARTING Electronics GmbH | Marienwerderstraße 3 | 32339 Espelkamp | Germany
Phone +49 5772 47-97200 | electronics@HARTING.com | www.HARTING.com

Pushing Performance
Since 1945

Commercial data

European customs tariff number	85366990
GTIN	5713140035560
ETIM	EC002637
eCl@ss	27460201 PCB connector (board connector)

Cross section of solder termination

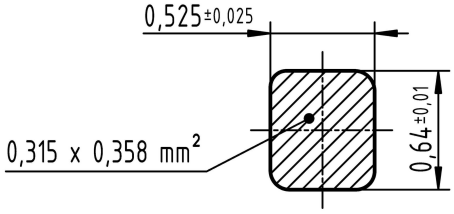

HARTING Electronics GmbH | Marienwerderstraße 3 | 32339 Espelkamp | Germany
Phone +49 5772 47-97200 | electronics@HARTING.com | www.HARTING.com

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HARTING:

21033212818 09 15 004 3013 09670254701 19200161540 09 14 003 3101 09000005103 09120173001 09200031250 09330062648 19300160232 21470000003 09110006131 09140033003 09651616711 19591204012 09 12 007 3001 09 14 017 3101 09300161430 09300245425 09670255601 19400160513 09200031640 09 14 000 9950 19300240467 09 20 003 0301 09140083117 19200100290 09000005341 09400030311 09694115136