
DASH NO.	M CODE	MADE FROM

GSD

7703-1

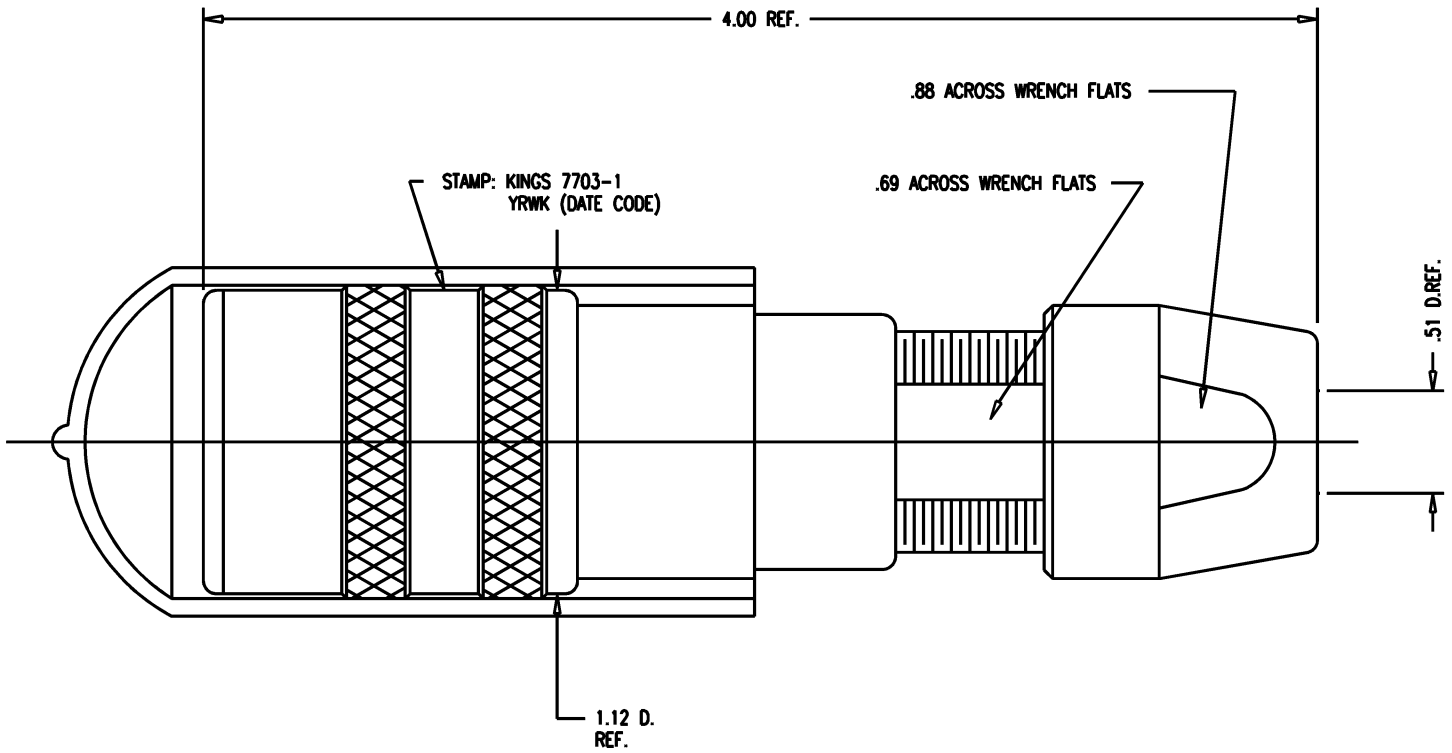

NOTES:
1. FOR USE WITH 700 CABLE GROUP.
2. FOR CABLING INSTRUCTIONS SEE KAI-8010.
3. FOR CABLE TRIMMING USE KTJ-300 AND KTD-300.
4. FOR CRIMPING USE DIE SIZE 2040.
5. MATERIALS:
   INSULATORS-TEFLON, ASTM-D-4894
   GASKETS-SILICONE RUBBER, ZZ-R-765
   CAP-VINYL
   K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM-B-135
   CENTER CONTACT, OUTER CONTACT SPRING, INSERT } BER. COP., ASTM-B-196
   ALL OTHER METAL PARTS-BRASS, ASTM-B16
6. FINISHES:
   CENTER CONTACT, OUTER CONTACT SPRING } GOLD PLATE PER MIL-G-45204
   NUTS, COLLET, BODIES } KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
   ALL OTHER METAL PARTS-SILVER PLATE PER QQ-S-365
7. ELECTRICAL CHARACTERISTICS:
   NOMINAL IMPEDANCE: 75 OHMS
   FREQUENCY RANGE: DC-500 MHZ
   VOLTAGE BREAKDOWN: CENTER CONDUCTOR/INNER GROUND: 1500 VRMS
   INNER GROUND/OUTER GROUND: 500 VRMS

GSD

REVISIONS	
ISSUE	CHANGES
0	ER 35421 KH 04/10/95
1	CN 37238 A KH 02/03/97
2	CN 38583 C BDH 05/24/02

KAM5516

SCALE 2:1

APPROX SURFACE AREA

USED ON

REF: KP-8020-700-400

JK, TRI-LOC,
SERIAL DIGITAL

DRAWN	KH	DATE	04/10/95
DESIGN	DW	DATE	04/11/95
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

7703-1

MAY 2007 THIS DRAWING BECAME THE PROPERTY OF PROPERTY OF
WINCHESTER ELECTRONICS CORPORATION, WALLINGFORD, CT 06492

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Winchester Interconnect:

KC-79-237 M06 SBC8241 875-21-17 KA-59-318 KC-59-284 KC79-150 KM-59-14 361V509E KA-59-251 364KNT KA-59-22 KC-39-38 KTH-2208 RBC1694A 1702-1 364M795 C-79-20-1 0345-E00-C7202NU 125-57-9 2435-84-1 364A595 364A795BL M39012/28-0101 1319505 875-92-3 KTH-2021 KTH-2207 SBC1695A 755-112-9 910A204M