Max. 480 m³/h

DC axial fans

172 x 150 x 51 mm



- **Material:** Housing: Die-cast aluminum
  Impeller: GRP[1)] (PA)
- **Direction of air flow:** Exhaust over struts
- **Direction of rotation:** Counterclockwise, looking towards rotor
- **Connection:** on flat plugs 3 x 0.5 mm
- **Highlights:** Housing with grounding lug for screw M4 x 8 (Torx)
- **Weight:** 760 g


- **Possible special versions:**
  (See chapter DC fans - specials)
  - Speed signal
  - Go / NoGo alarm
  - Alarm with speed limit
  - External temperature sensor
  - Internal temperature sensor
  - PWM control input
  - Analog control input
  - Moisture protection
  - Salt spray protection
  - Degree of protection: IP 54

1) Fiberglass-reinforced plastic


Series 6400 **Nominal data** **Type**	Air flow m³/h	Air flow cfm	**Nominal voltage** VDC	Voltage range VDC	Sound pressure level dB(A)	Sound power level Bel(A)	Sintec sleeve bearings Ball bearings □ / ■	Power consumption*** Watts	Nominal speed rpm⁻¹	Temperature range °C	Service life L_{10} (40 °C) ebm-papst standard Service life L_{10} (T_{max}) ebm-papst standard Hours	Life expectancy L_{10IPC} (40 °C) see page 17 Hours	Curve
6412 M	350	206	**12**	8...15	52	6.0	■	12	2 850	-20...+72	80 000 / 37 500	135 000	①
6424 M	350	206	**24**	12...32	52	6.0	■	12	2 850	-20...+72	80 000 / 37 500	135 000	①
6424	410	241	**24**	12...28	57	6.4	■	17	3 400	-20...+72	75 000 / 35 000	127 500	②
6424 H	480	283	**24**	12...28	63	7.1	■	26	4 000	-20...+55**	70 000 / 50 000	117 500	③
6448	410	241	**48**	28...60	57	6.4	■	17	3 400	-20...+72	75 000 / 35 000	127 500	②
6448 H*	480	283	**48**	28...60	63	7.1	■	26	4 000	-20...+55**	70 000 / 50 000	117 500	③

Subject to change

* Strand 310 mm.
** 72 °C versions on request
*** Power consumption at free air flow, these values can be significantly higher in the operating point.

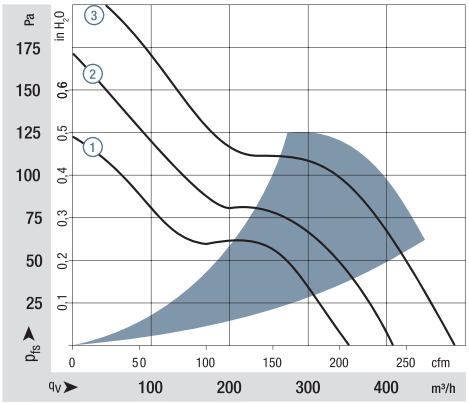

Air performance measured according to: ISO 5801.
Installation category A, without contact protection.
Noise: Total sound power level L_{WA} ISO 103002 measured on a hemisphere with a radius of 2 m.
Sound pressure level L_{pA} measured at 1 m distance from fan axis.
The values given are applicable only under the specified measuring conditions and may differ depending on the installation conditions.
In the event of deviation from the standard configuration, the parameters must be checked after installation!
For detailed information see
http://www.ebmpapst.com/general conditions

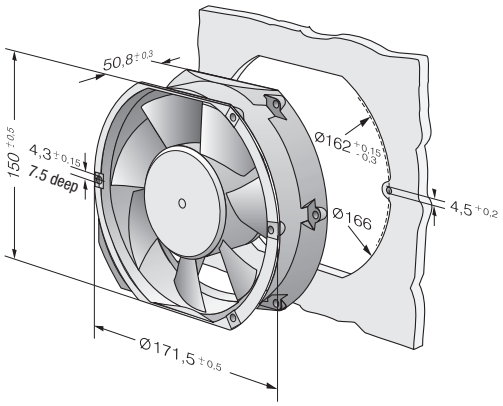

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ebmpapst:

4314NHH 6248N G2E140-AI28-01 G2E146-BF05-29 4412 F/2 4580 Z 7114NH 8315100283 PMFA80 W2S130-AA03-01 4414FNH 8315100229 8412N/2G-185 4414 F/2M 7212N 8315100059 RG160-28/14N 8312 QG030-148/12 R2E175-AC77-05 R2E180-AS77-40 4600Z-881 A2D170-AA04-01 LZ 30-5 4114N/2H4 4412F/2M-504 3806 4650X 96358-2-4013 A2D300-AD02-02