Max. 4.6 m³/h

DC axial fans

☐ 25 x 8 mm



- **Material:** Housing: GRP[1] (PBT)
  Impeller: GRP[1] (PA)
- **Direction of air flow:** Exhaust over struts
- **Direction of rotation:** Counterclockwise, looking towards rotor
- **Connection:** Via single wires AWG 28, TR 64
- **Weight:** 5 g


- **Possible special versions:**
  (See chapter DC fans - specials)
  - Speed signal
  - Moisture protection

1) Fiberglass-reinforced plastic


Series 250 **Nominal data**	Air flow	Air flow	**Nominal voltage**	Voltage range	Sound pressure level	Sound power level	Sintec sleeve bearings Ball bearings	Power consumption	Nominal speed	Temperature range	Service life L_{10} (20 °C) ebm-papst standard Service life L_{10} (60 °C) ebm-papst standard	Life expectancy L_{10IPC} (40 °C) see page 17	Curve
Type	**m³/h**	**cfm**	**VDC**	**VDC**	**dB(A)**	**Bel(A)**	**□ / ■**	**Watts**	**rpm⁻¹**	**°C**	**Hours**	**Hours**	
255 M	2.3	1.2	**5**	4.5...5.5	5	< 3	■	0.2	6 500	-10...+70	45 000 / 17 500	47 500	①
255 N	3.5	1.9	**5**	4.5...5.5	16	< 3	■	0.4	9 600	-10...+70	40 000 / 15 000	42 500	②
255 H	4.6	2.6	**5**	4.5...5.5	23	4.4	■	0.6	12 000	-10...+55	35 000 / 15 000*	37 500	③
252 N	3.4	1.9	**12**	10...14	15	< 3	■	0.5	9 000	-10...+70	40 000 / 15 000	42 500	②
252 H	4.6	2.6	**12**	10...14	23	4.4	■	0.7	12 000	-10...+55	35 000 / 15 000*	37 500	③

Subject to change

* at 55 °C

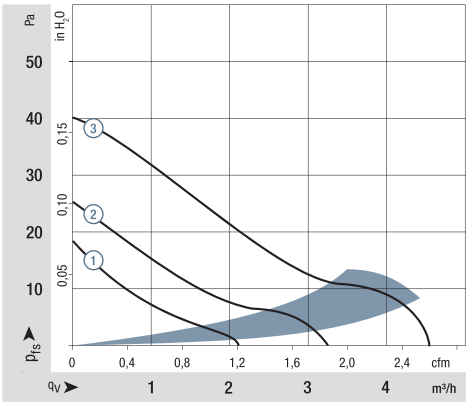

Air performance measured as per: ISO 5801.
Installation category A, without accidental contact.
Noise: Total sound power level L_{WA} ISO 103002 measured on a hemisphere with a radius of 2 m.
Sound pressure level L_{pA} measured at 1 m distance from fan axis.
The values given are applicable only under the specified measuring conditions and may differ depending on the installation conditions.
In the event of deviation from the standard configuration, the parameters must be checked after installation!
For detailed information see
http://www.ebmpapst.com/general conditions

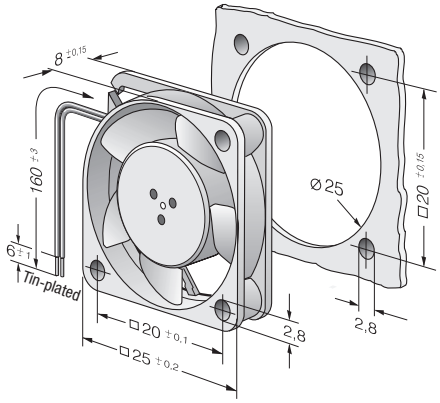

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ebmpapst:

7114NH 8315100059 8412N/2G-185 A2D170-AA04-01 G2E140-AI28-01 G2E146-BF05-29 PMFA80 4114N/2H4 96358-2-4013 R2E175-AC77-05 R2E180-AS77-40 4314NHH 4412 F/2 7212N 8312 8315100229 8315100283 LZ 30-5 3806 4414 F/2M 4600Z-881 4650X A2D300-AD02-02 QG030-148/12 RG160-28/14N 4414FNH 4580 Z W2S130-AA03-01 4412F/2M-504 6248N