

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS 変更					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED	12JUN2014	T.S	N.Y
	C	REVISED	10APR2015	T.S	N.Y
	C1	ECR-22-155451	13OCT2022	B.P	T.L

1. DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
2. MATERIAL HOUSING:POLYESTER OF GLASS FILLED THERMO PLASTIC(UL94V-0), COLOR:BLACK
   CONTACT:COPPER ALLOY
   SHELL:COPPER ALLOY
3. FINISH CONTACT UNDER:Ni PLATING ALL SURFACE 1.25μm MIN
   CONTACT AREA:Au PLATING 0.75μm MIN
   P.C.BOARD ATTACHMENT AREA:Tin-Cu PLATING 2.5μm MIN
   SHELL ALL SURFACE:BRIGHT Tin PLATING 2.5μm MIN OVER Ni PLATING ALL SURFACE 1μm MIN

-1:本図
-1:AS SHOWN

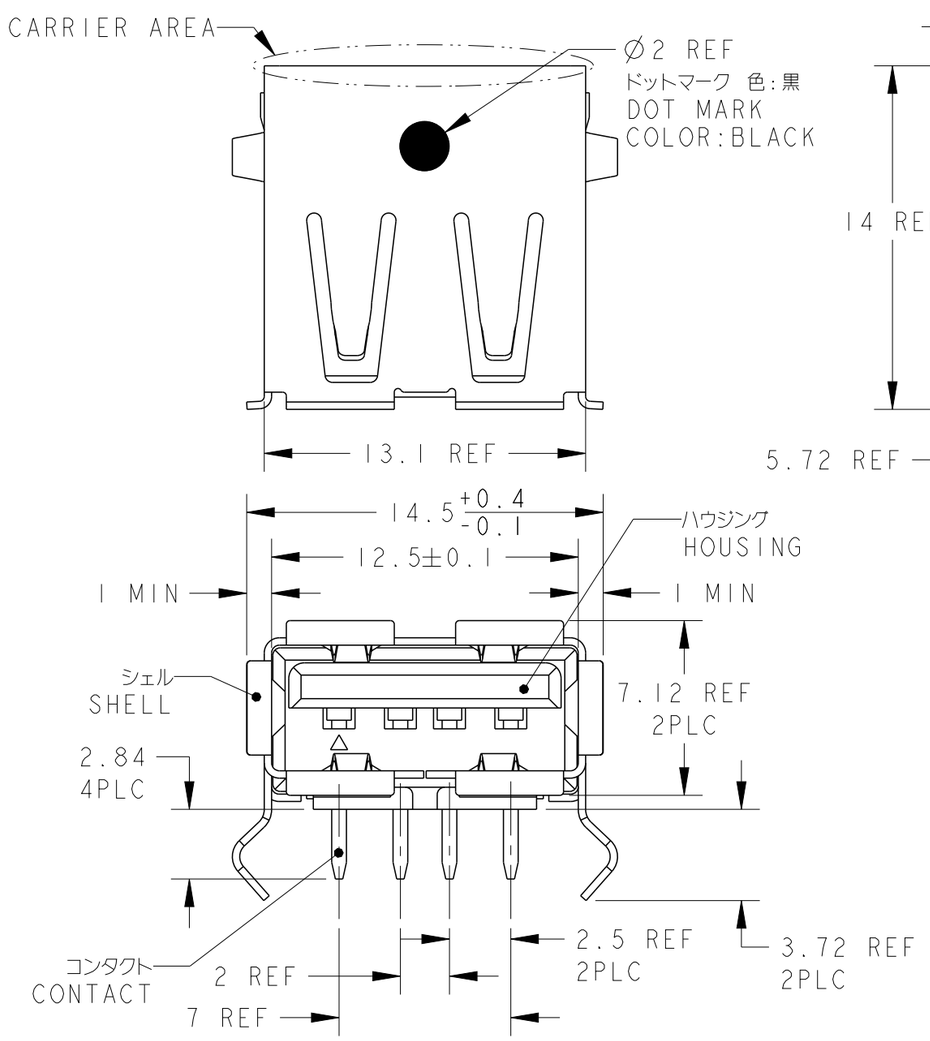

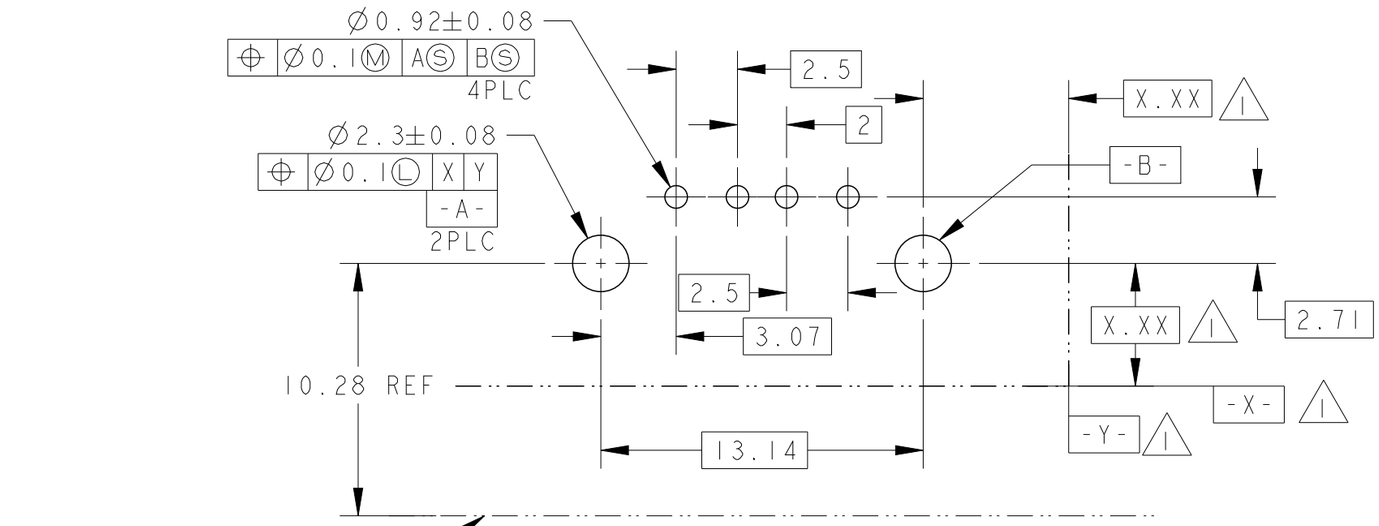

推奨基板取付穴寸法 推奨基板厚:1.57mm
RECOMMENDED PC BOARD HOLE PATTERN, PC BOARD THICKNESS:1.57mm

1. 当該データムと基準寸法はユーザーによって定められる
2. 材料 ハウジング:ガラス入り熱可塑性ポリエステル樹脂 UL94V-0 色:黒
   コンタクト:銅合金
   シェル:銅合金
3. 仕上げ コンタクト 全面:ニッケル下地めっき 1.25μm以上
   接触部:金めっき 0.75μm以上
   基板取付部:錫-銅めっき 2.5μm以上
   シェル 全面:ニッケル下地めっき 1μm以上の上に 光沢錫めっき 2.5μm以上

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 粍 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
一般公差 ±0.25
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL 材料 2
FINISH 仕上 3

DWN	S.INOMATA 07SEP2007
CHK	I.HASEGAWA 07SEP2007
APVD	I.HASEGAWA 07SEP2007
PRODUCT SPEC 製品規格	108-78523
APPLICATION SPEC 取付適用規格	114-5433
WEIGHT	1.80

TE Connectivity

NAME 名称: INDUSTRIAL USB REC ASSY R/A IROW -

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A3	-	C-1903814	-

Customer Drawing | SCALE 尺度 4:1 | SHEET 1 OF 1 | REV C1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1393431-1 141991-2 1903112-2 1969656-1 3430B2F51RTDF 1-794222-0 175977-2 CPF0402B37K4E1 ROX05SJ18R 936348-1 SBCHE154R7K 650075-000 MPT100C18RF SBCHE64R7K 1743455-2 RH73H2A40MKTN TE50BR39J U5254-000005-030PA 2005330-1 2310537-1 2377783-2 2380312-2 2834055-1 917696-1 SMW73R0JT CRGCQ2010J3K3 1-962915-1 2-292161-3 3-1393225-0 3631B101LL