
Rocker Switch | **SRD1-1F-DC-1-BUU**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

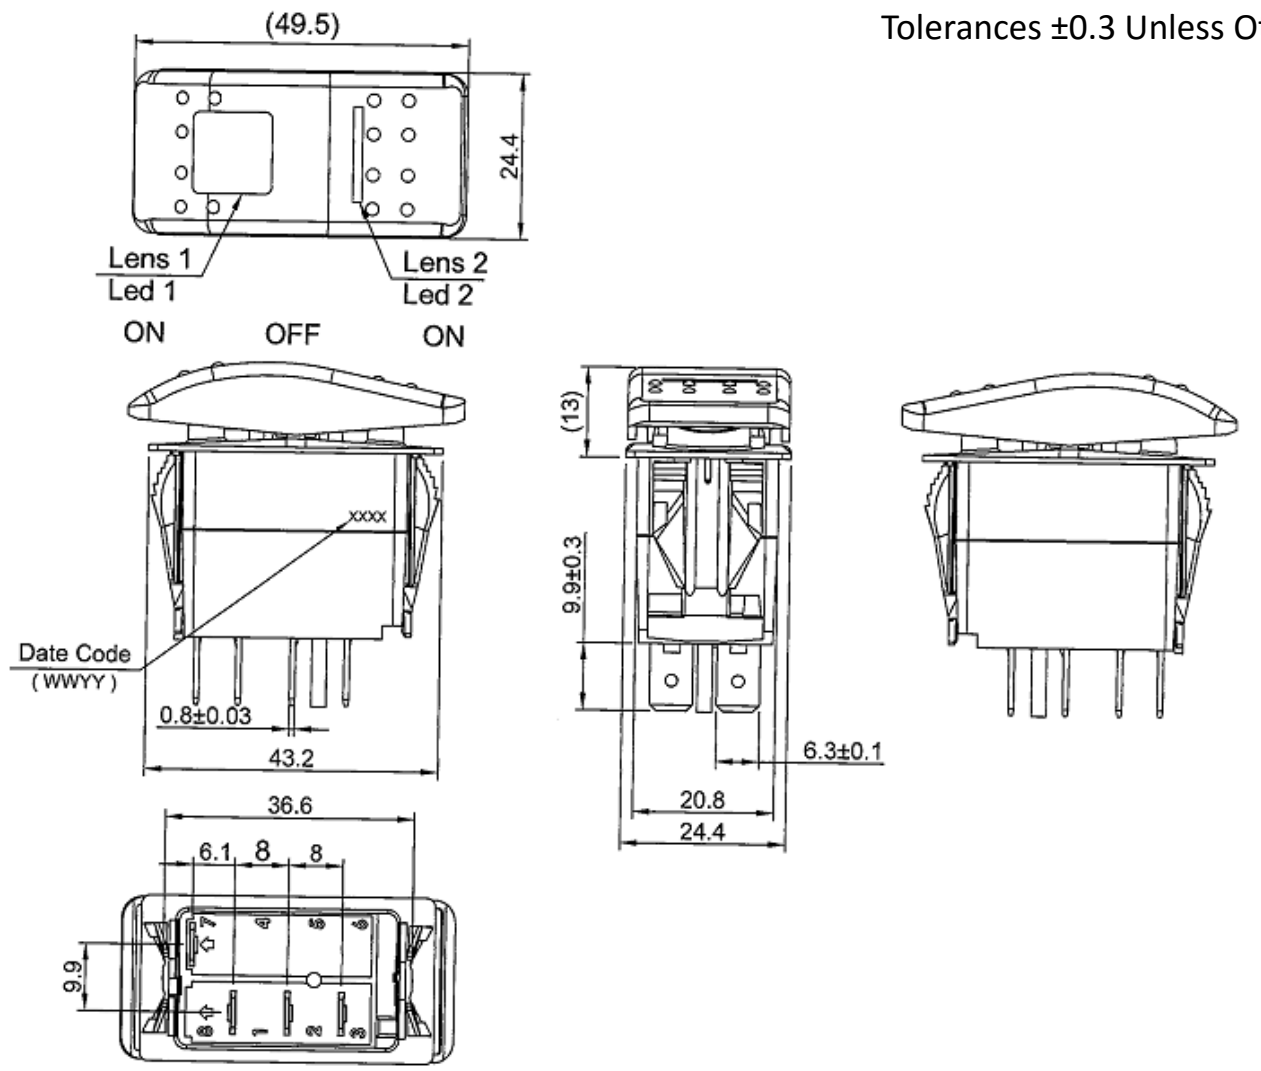


Mounting Hole

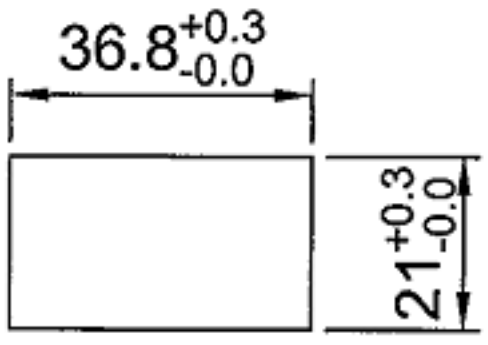

Thickness: 1.0-5.0mm

Circuit Diagram

4P SPDT ON-OFF-ON (LED-D)

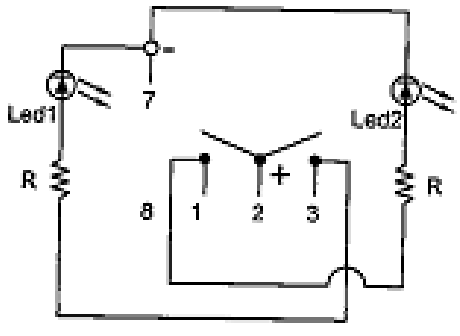

Electrical Specifications

Rating	21A 14V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame/ Actuator	Black, Nylon 66 (94V-2)
Lens (1,2)	White diffused, PC
LED (1,2)	Blue, dependent
Terminals	Silver plated copper/ Brass
Waterproof	IP56

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

SRD2-2F-DC-1-RNN TA1-1A-DC-4 TB2-2H-DC-1 TE6-1A-DC-1-AL TC6-P1-Z WR1 PB-1A-DC-2-B SRD2-1G-DC-1-BNN TB1-2H-DC-6 PB-1A-DC-2-RDL SB-1B-DC-3-B SC-B TE6-1A-DC-1-UL PD-1E-DC-9-UL RD2-1A-DC-1-AL SRC1-1B-DC-1-B TA2-1A-DC-5 TE3-1A-DC-1-AL PB-1B-DC-2-RIL SB-1B-DC-3-R SRB1-1G-DC-1-NN TE1-1F-DC-1-PB RC-1A-DC-1-AL RG3-1A-DC-1-B TA1-1F-DC-4 RA4-2A-DC-2-AL SRD1-2A-DC-1-BGN TA2-1G-DC-6-O RF1-1A-DC-2-B-3 SRD2-2F-DC-1-BNN