
molex
one company > a world of innovation

This document was generated on 10/04/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 1510482206
Status: Active
Overview: CP Wire-to-Board and Wire-to-Wire Connector Systems
Description: CP-6.5 Header, 6.50mm Pitch, Dual Row, Vertical, Polarized, Positive Lock, Tube Packaging, Glow-Wire Capable, 2 Circuits, Black

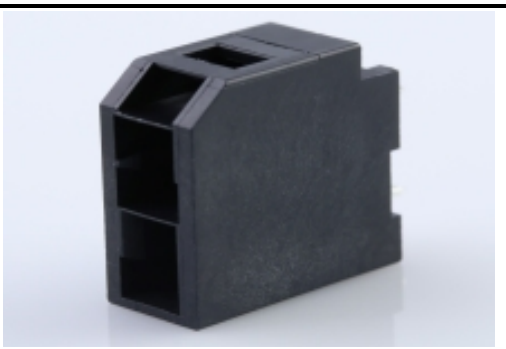

Series image - Reference only

Documents:

- Drawing (PDF)
- 3D Model (PDF)
- 3D Model
- Product Specification PS-151048-0001-001 (PDF)
- Packaging Specification PK-151048-0001-001 (PDF)
- Packaging Specification PK-151048-0002-001 (PDF)
- Test Summary 1510480001-TS-000 (PDF)
- Datasheet (PDF)
- Symbol Footprint Data SYM-151048-1201-001 (PDF)
- RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	151048
Application	Power, Wire-to-Board
Comments	See Product Specification for maximum current rating by circuit size and wire AWG
Overview	CP Wire-to-Board and Wire-to-Wire Connector Systems
Product Name	CP-6.5
UPC	889056067263

Physical

Breakaway	No
Circuits (Loaded)	2
Circuits (maximum)	2
Color - Resin	Black
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	Yes
Guide to Mating Part	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Matte Tin
Material - Plating Termination	Matte Tin
Material - Resin	Polyamide
Net Weight	1.725/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	3.80mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tube
Pitch - Mating Interface	6.50mm
Plating min - Mating	1.270µm
Plating min - Termination	1.270µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Temperature Range - Operating	-40° to +105°C

EU ELV
Not Relevant

EU RoHS
Compliant

China RoHS

REACH SVHC
Not Contained Per - D(2021)4569-DC (8 July 2021)

Halogen-Free Status
Not Low-Halogen

For more information, please visit Contact US

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
151048 Series

Mates With
CP-6.5 Receptacle Housing 1510492206 , 1512072206

Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	10.0A
Voltage - Maximum	600V AC (RMS)/DC
Solder Process Data	
Lead-freeProcess Capability	WAVE
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-151048-0001-001, PK-151048-0002-001
Product Specification	PS-151048-0001-001
Sales Drawing	SD-151048-0001-001
Symbol/Footprint Data	SYM-151048-1201-001
Test Summary	1510480001-TS-000

This document was generated on 10/04/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

190990009 430451220 0190690033 152670269 190670071 190690096 759001161 430450225
447641402 447642001 0190700155 151660057 151670255 447691602 152660117 190990010
398800403 439151216 459705185 760475001 152670357 444280402 0436400901 0436802002
190730231 5046940301 152670251 397730002 417920538 436803002