74LVC1G34 Single Buffer Gate

1. General Description

1.1 Description

This single buffer gate is designed for 1.65-V to 5.5-V VCC operation.

The 74LVC1G34 device performs the Boolean function Y = A in positive logic.

The CMOS device has high output drive while maintaining low static power dissipation over a broad VCC operating range.


1.2 Features

- Supports 5V V_{CC} operation
- Inputs accept voltages to 5.5 V
- Low power consumption, 10μA max I_{CC}
- ±24mA output drive at 3.3V
- I_{off} supports live insertion, partial power down mode, and back-drive protection


1.3 Device Information

PART NUMBER	PACKAGE
74LVC1G34	SOT23
	SC70
	SOT5X3
	DFN
	DSBGA


2. Connection Diagrams and Pin Description

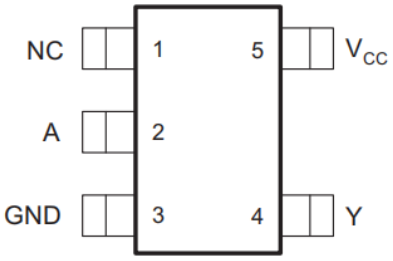


SOT23-5(LT)




SC70(CT)




SOT5X3(DT)




DFN(BD)-6




DFN(CD)-6



DSBGA(AG)



DSBGA(CG)



DFN(ED)-5

Figure 2.1: Top View

PIN No.					NAME	I/O	FUNCTION
LT/CT/DT	BD/CD	AG	CG	ED			
1	1,5	A1,B2	--	1	NC		No Connected
2	2	B1	A1	2	A	I	Input
3	3	C1	B1	3	GND		Ground
4	4	C2	B2	4	Y	O	Output
5	6	A2	A2	5	VCC		Supply Voltage

3. System Diagram

3.1 Logic Diagram



Figure 3.1：74LVC1G34 Logic Diagram

3.2 Function Table

Input	Output
A	Y
1	1
0	0

1=High State, 0=Low State

4. Specifications

4.1 Absolute Maximum Ratings

Symbol	Parameter	MIN	MAX	Unit
V_{CC}	Supply Voltage	-0.5	6.5	V
V_I	Input Voltage Range	-0.5	6.5	V
V_O	Voltage Range(applied to any output in the high-impedance or power-off state)(1)	-0.5	6.5	V
	Voltage Range(applied to any output in the high or low state)	-0.5	VCC + 0.5	V
I_O	Continuous Output Current		±50	mA
T_J	Junction Temperature		125	℃
T_{OP}	Operating Temperature	0	70	℃

Absolute maximum ratings are those values beyond which the device could be permanently damaged,These are stress ratings only,which do not imply functional operation of the device at these or any other conditions beyond those indicated under normal operating conditions.

(1) The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.

4.2 Electrical Characteristics

4.2.1 DC Specifications

(T_a=25℃, voltages are referenced to GND (ground=0V),All typical values are at VCC=3.3V, unless otherwise specified)

Symbol	Parameter	Test Condition	MIN	TYP	MAX	Unit
V_{IH}	High Level Input Voltage	V_{CC}=1.65V to 1.95V	0.65V_{CC}	--	--	V
		V_{CC}=2.3V to 2.7V	1.7	--	--	V
		V_{CC}=3V to 5.5V	0.7V_{CC}	--	--	V
V_{IL}	Low Level Input Voltage	V_{CC}=1.65V to 1.95V	--	--	0.35V_{CC}	V
		V_{CC}=2.3V to 2.7V	--	--	0.7	V
		V_{CC}=3V to 3.6V	--	--	0.8	V
		V_{CC}=4.5V to 5.5V	--	--	0.3V_{CC}	V
I_{OH}	High Level Output Current	V_{CC}=1.65V	--	--	-4	mA
		V_{CC}=2.3V	--	--	-8	mA
		V_{CC}=3V	--	--	-16	mA
			--	--	-24	mA
		V_{CC}=4.5V	--	--	-32	mA
I_{OL}	Low Level Output Current	V_{CC}=1.65V	--	--	4	mA
		V_{CC}=2.3V	--	--	8	mA
		V_{CC}=3V	--	--	16	mA
			--	--	24	mA
		V_{CC}=4.5V	--	--	32	mA

Symbol	Parameter	Test Condition	MIN	TYP	MAX	Unit
V_{OH}	High Level Output Voltage	V_{CC}=1.65V to 5.5V,I_{OH}=-100uA	V_{CC}-0.1	--	--	V
		V_{CC}=1.65V,I_O=-4mA	--	1.47	--	V
		V_{CC}=2.3V,I_O=-8mA	--	2.15	--	V
		V_{CC}=3V,I_O=-16mA	--	2.8	--	V
		V_{CC}=3V,I_O=-24mA	--	2.7	--	V
		V_{CC}=4.5V,I_O=-32mA	--	4.2	--	V
V_{OL}	Low Level Output Voltage	V_{CC}=1.65V to 5.5V,I_{OH}=100uA	--	--	0.1	V
		V_{CC}=1.65V,I_O=4mA	--	0.09	--	V
		V_{CC}=2.3V,I_O=8mA	--	0.1	--	V
		V_{CC}=3V,I_O=16mA	--	0.15	--	V
		V_{CC}=3V,I_O=24mA	--	0.25	--	V
		V_{CC}=4.5V,I_O=32mA	--	0.25	--	V
I_I	A Input Leakage Current	V_{CC}=0 to 5.5V,V_I=V_{CC} or GND	--	0	±1	uA
I_{off}	Power Off Leakage Current	V_{CC}=0V,V_I or V_O=5.5V	--	0	±10	uA
I_{CC}	Quiescent Supply Current	V_{CC}=1.65V to 5.5V,V_I=V_{CC} or GND,I_O=0	--	0	10	uA
ΔI_{CC}	Additional Quiescent Supply Current Per Input Pin	V_{CC}=3V to 5.5V,one input at V_{CC} -0.6V,other inputs at V_{CC} or GND	--	--	500	uA

5. Application Information

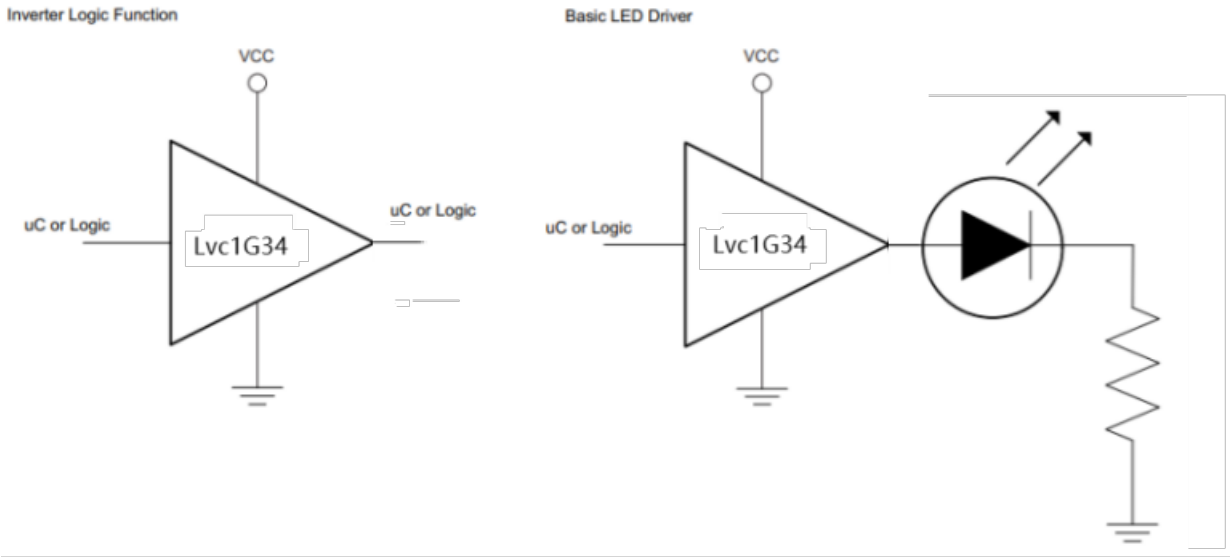



Figure 5.1：Application Schematic

6. Ordering Information

Orderable Device	Package Type	Pins	Packing	Package Qty
74LVC1G34LT05ARCQ	SOT23	5	Tape & Reel	3000
74LVC1G34CT05ARCQ	SC70	5	Tape & Reel	3000
74LVC1G34DT05ARDQ	SOT5x3	5	Tape & Reel	4000
74LVC1G34BD06AREQ	DFN(BD)	6	Tape & Reel	5000
74LVC1G34CD06AREQ	DFN(CD)	6	Tape & Reel	5000
74LVC1G34ED05ARCQ	DFN	5	Tape & Reel	3000
74LVC1G34AG05ARCQ	DSBGA	5	Tape & Reel	3000
74LVC1G34CG04ARCQ	DSBGA	4	Tape & Reel	3000


7. Package Information

7.1 SOT23-5

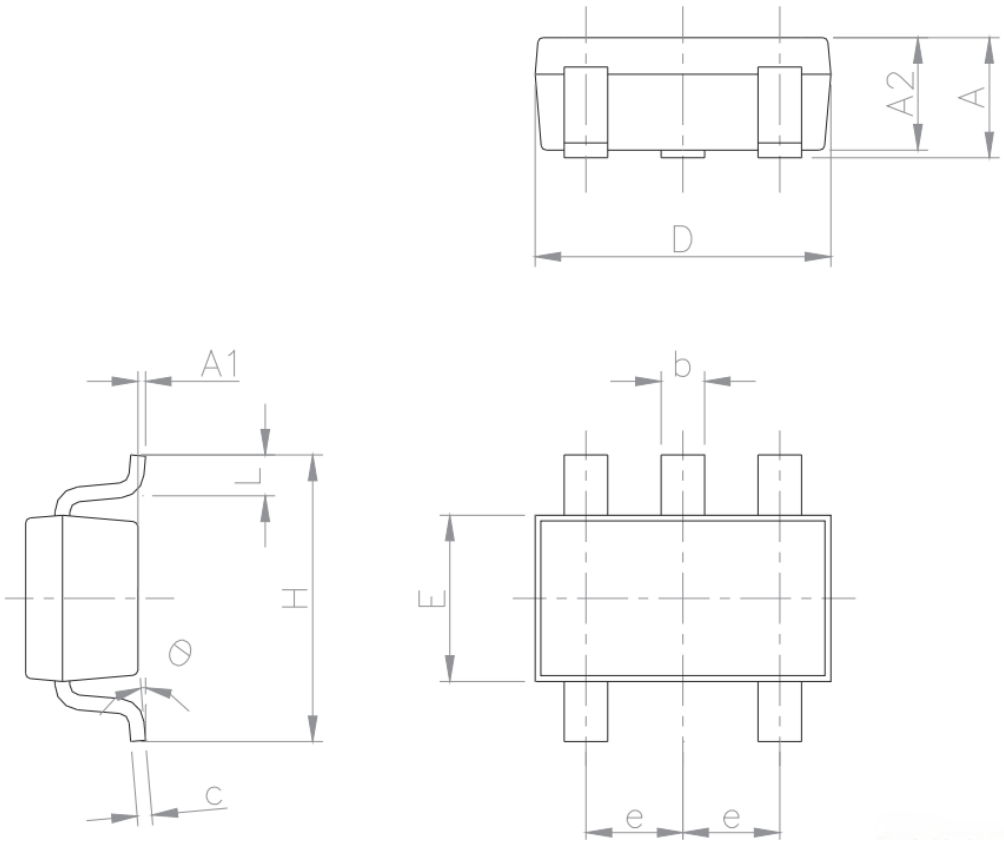


Symbol	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.90	-	1.45	0.035	-	0.057
A1	-	-	0.15	-	-	0.006
A2	0.90	-	1.30	0.035	-	0.051
b	0.35	-	0.50	0.014	-	0.020
c	0.09	-	0.20	0.004	-	0.008
D	2.80	-	3.05	0.110	-	0.120
E	1.50	-	1.75	0.059	-	0.069
e	-	0.95	-	-	0.037	-
H	2.60	-	3.00	0.102	-	0.118
L	0.10	-	0.60	0.004	-	0.024
θ	0 degrees	-	10 degrees	-	-	-

7.2 SC70

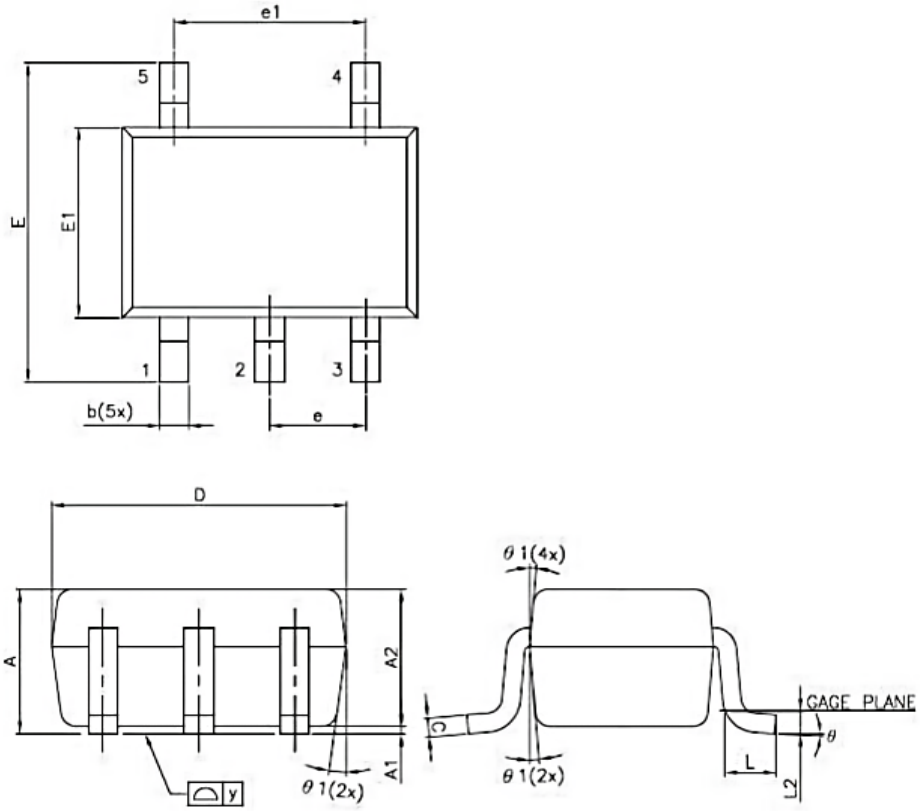


Symbol	Dim in mm		
	MIN	TYP	MAX
A	0.90	1.00	1.10
A1	0.00	0.05	0.10
A2	0.90	0.95	1.00
b	0.15	0.25	0.35
C	0.10	0.12	0.15
D	1.80	2.00	2.20
E	2.15	2.25	2.35
E1	1.15	1.25	1.35
e	0.650TYP.		
el	1.20	1.30	1.40
L	0.25	0.30	0.40
L2	0.15TYP.		
Y	0.00	0.05	0.10
θ	4°	8°	12°


7.3 SOT5X3

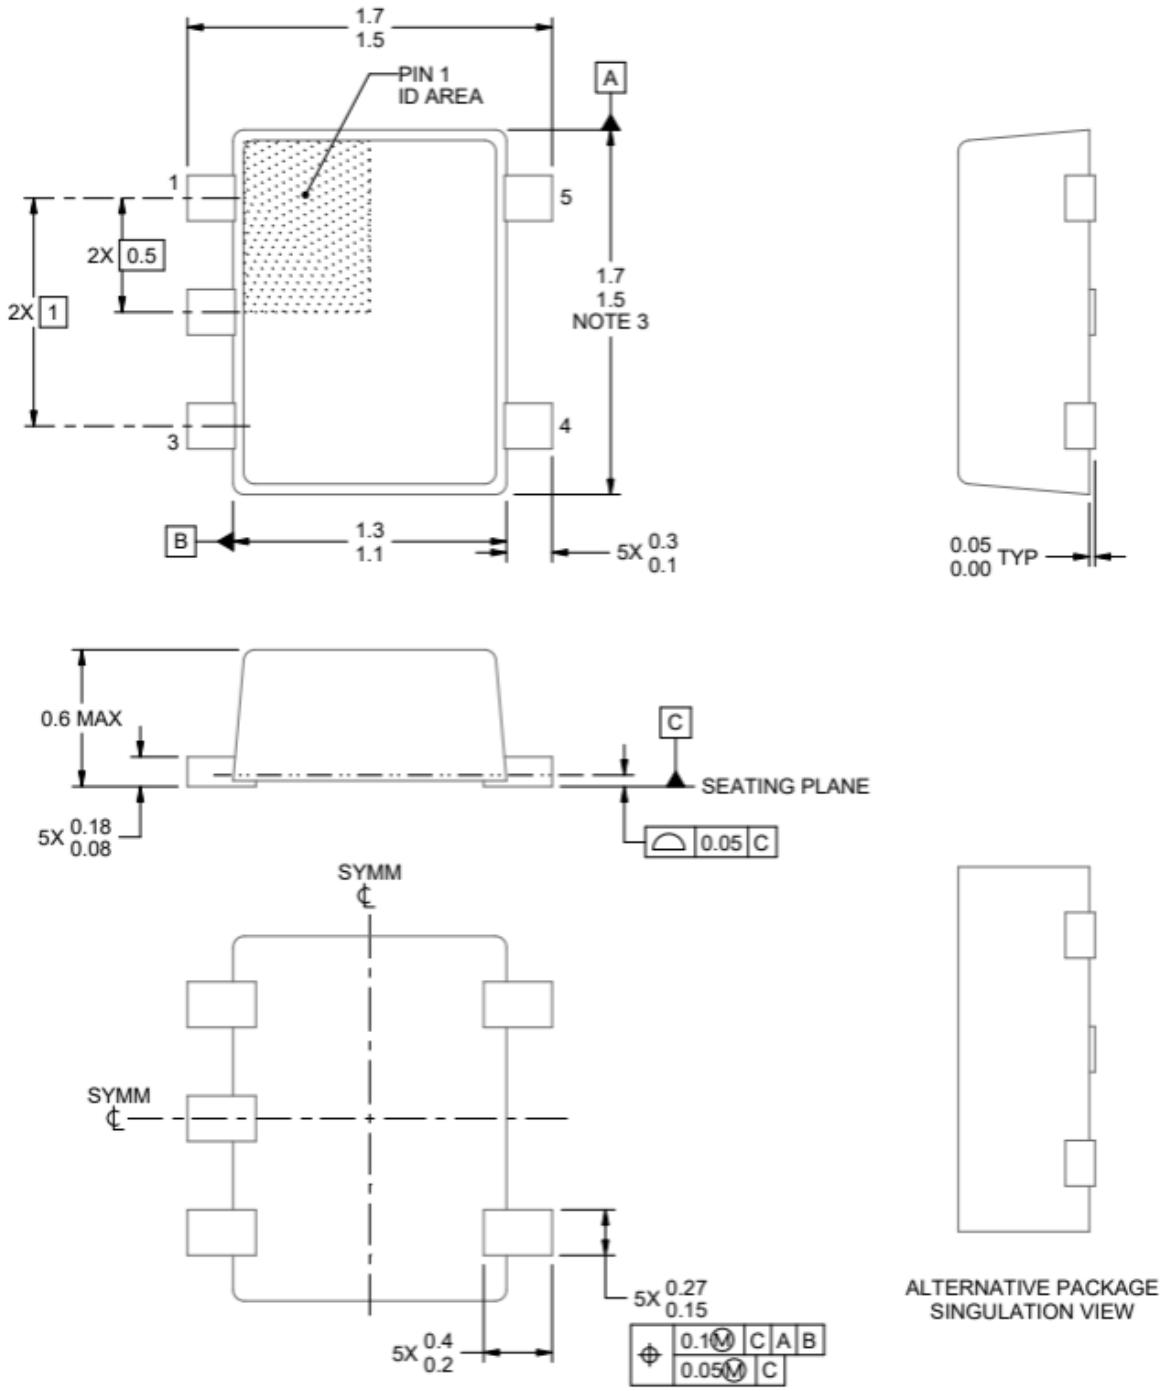
1.7
1.5
PIN 1
ID AREA
A
1
5
2X 0.5
2X 1
1.7
1.5
NOTE 3
3
4
B
1.3
1.1
5X 0.3
0.1
0.05
0.00 TYP
0.6 MAX
C
SEATING PLANE
5X 0.18
0.08
0.05 C
SYMM
SYMM
5X 0.27
0.15
5X 0.4
0.2
0.10 M C A B
0.05 M C
ALTERNATIVE PACKAGE
SINGULATION VIEW


7.4 DFN(BD)-6

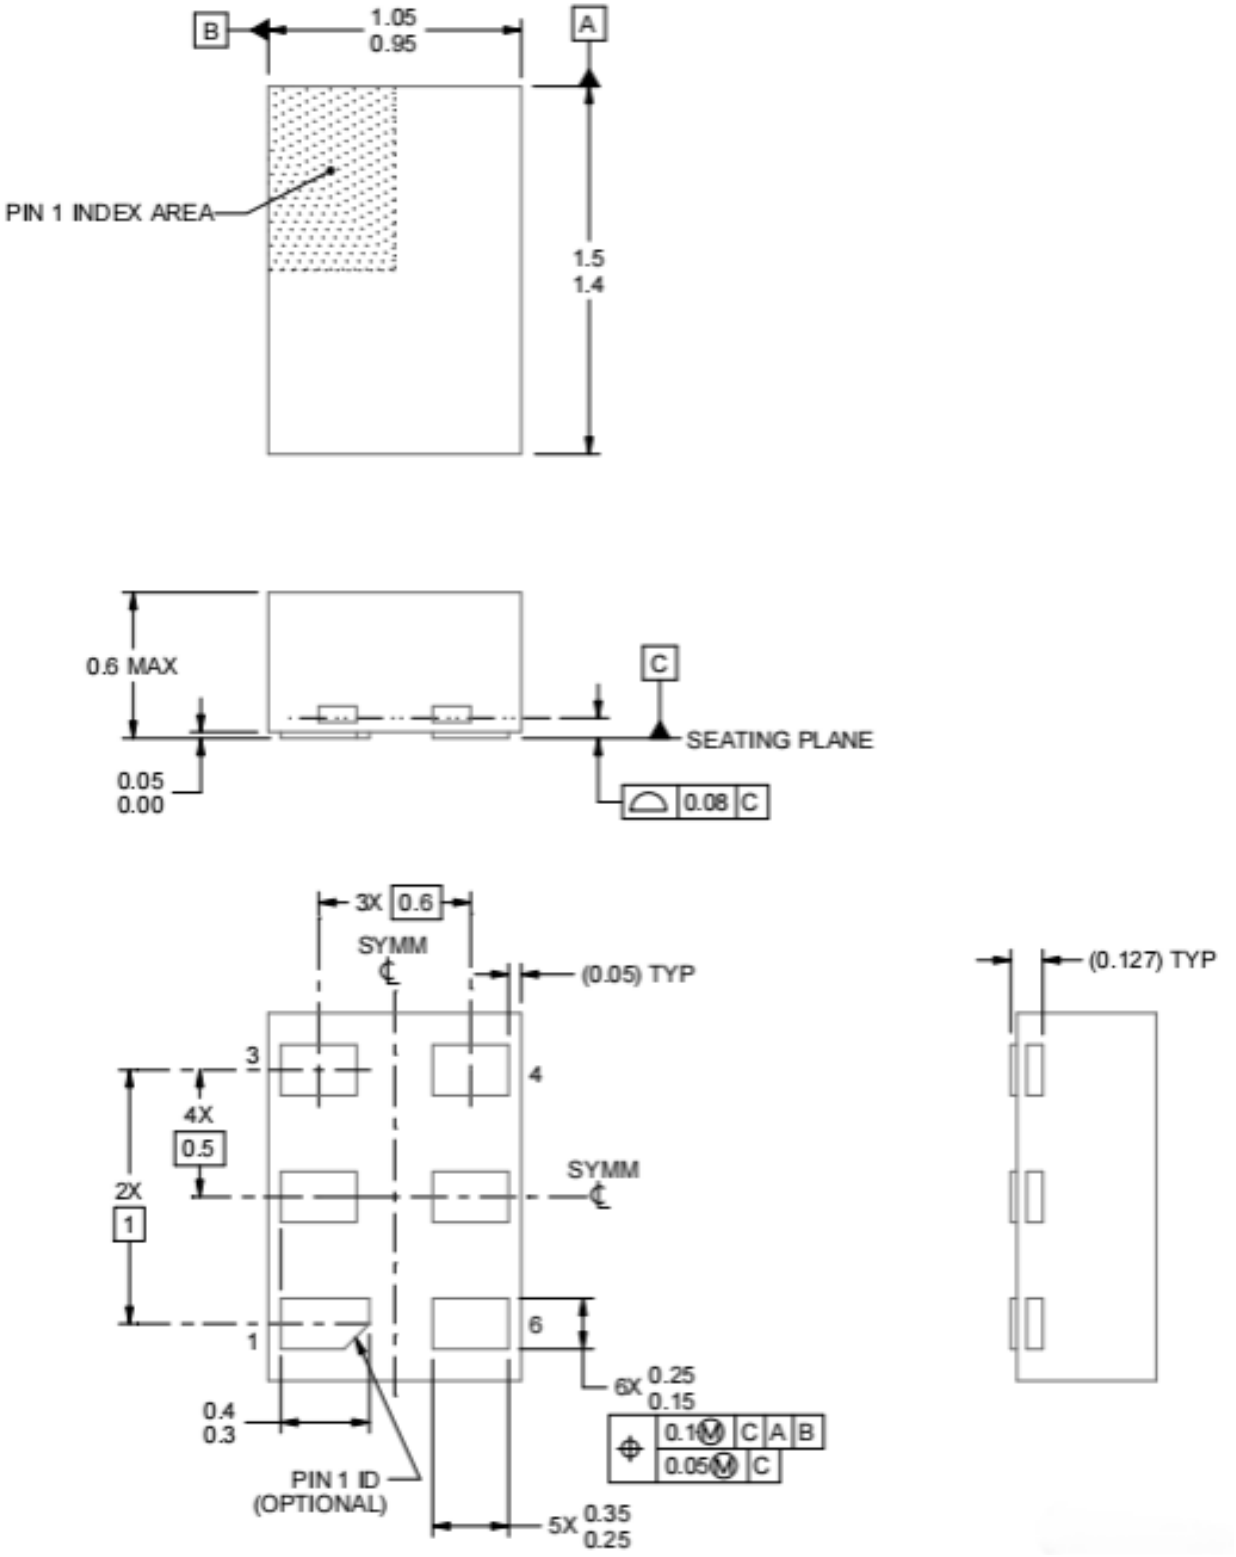
B
1.05
0.95
A
PIN 1 INDEX AREA
1.5
1.4
0.6 MAX
C
SEATING PLANE
0.05
0.00
0.08 C
3X 0.6
SYMM
(0.05) TYP
3
4
4X
0.5
SYMM
2X
1
1
6
6X 0.25
0.15
0.4
0.3
0.1 M C A B
0.05 M C
PIN 1 ID
(OPTIONAL)
5X 0.35
0.25
(0.127) TYP


7.5 DFN(CD)-6

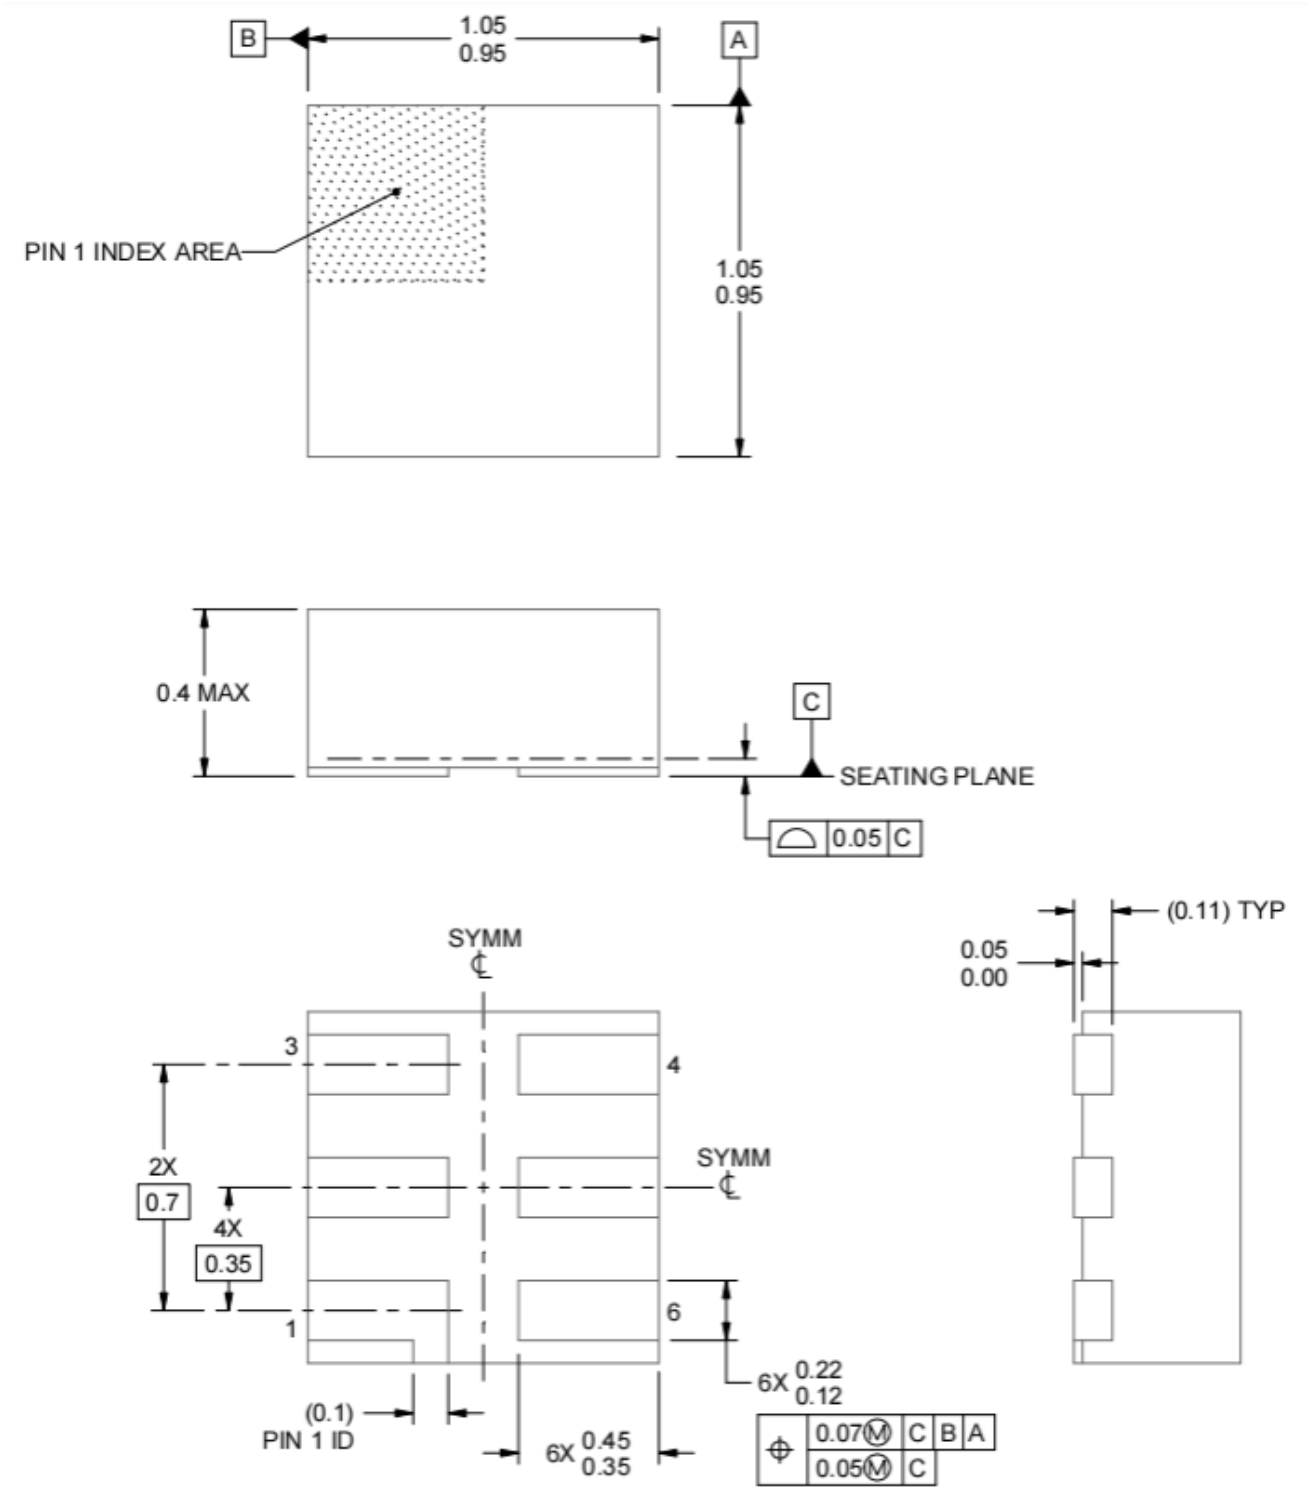

B
1.05
0.95
A
PIN 1 INDEX AREA
1.05
0.95
0.4 MAX
C
SEATING PLANE
0.05 C
SYMM
3
4
2X
0.7
4X
0.35
SYMM
1
6
6X 0.22
0.12
(0.1)
PIN 1 ID
6X 0.45
0.35
0.07 M C B A
0.05 M C
(0.11) TYP
0.05
0.00


7.6 DFN5

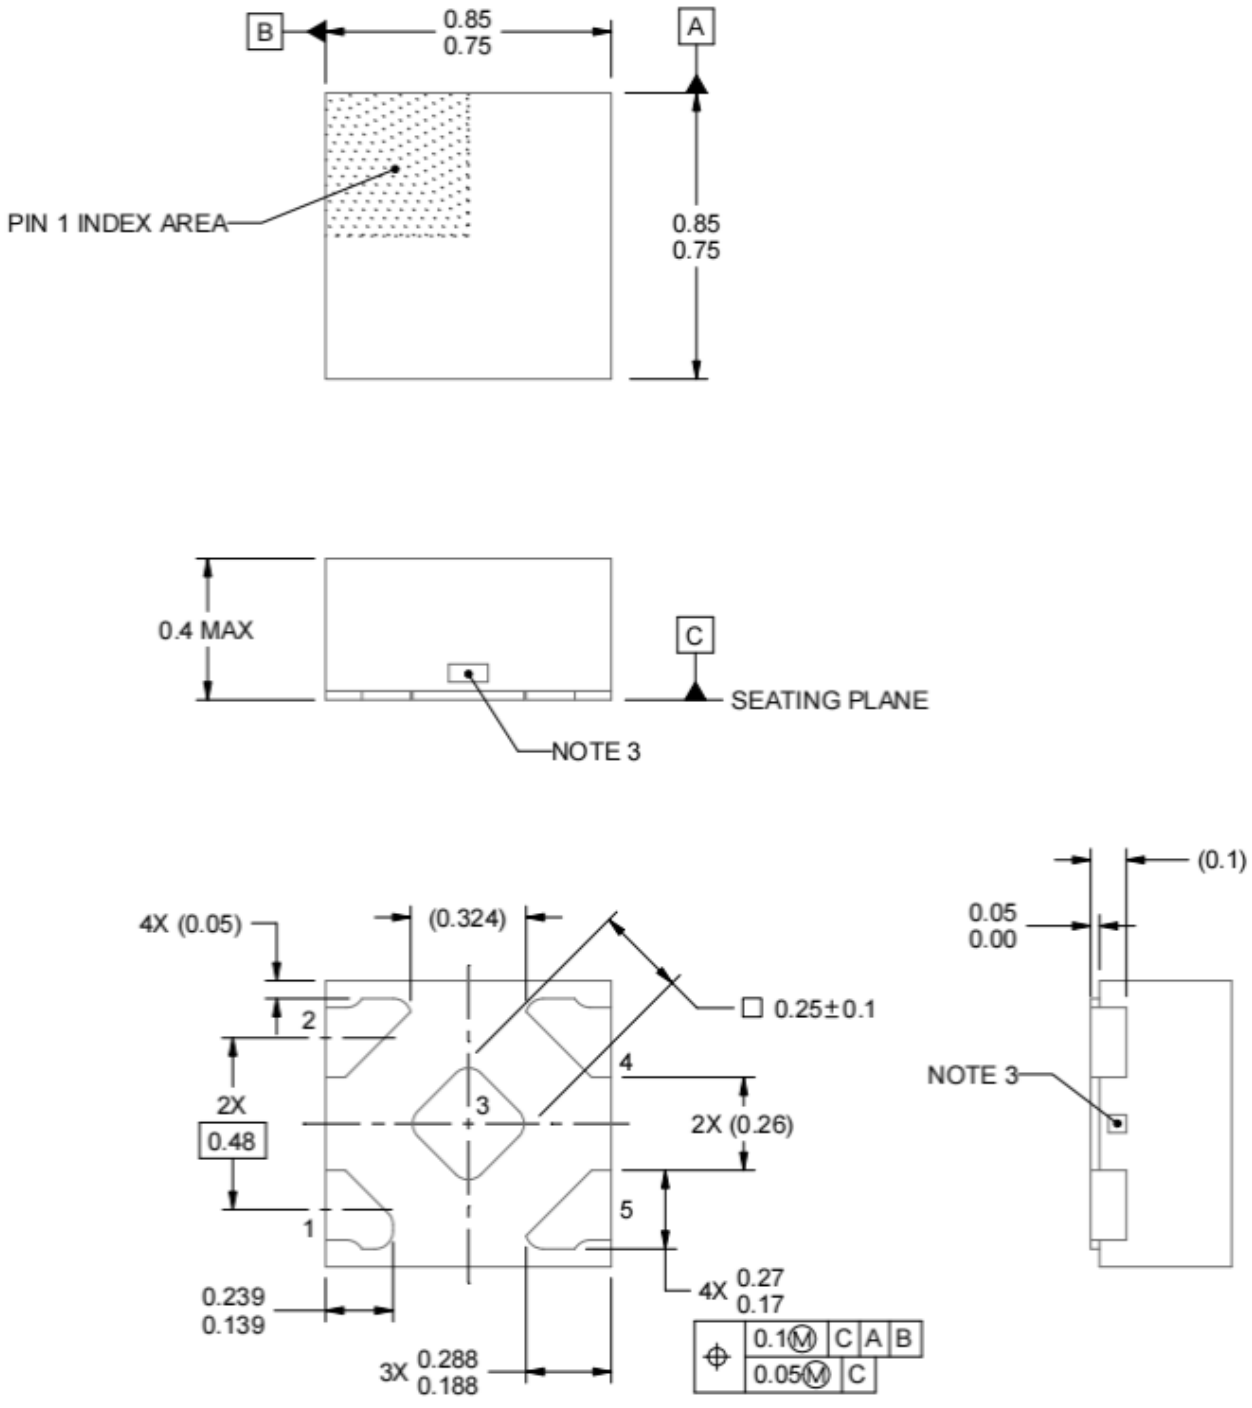
B
0.85
0.75
A
PIN 1 INDEX AREA
0.85
0.75
0.4 MAX
C
SEATING PLANE
NOTE 3
4X (0.05)
(0.324)
0.25±0.1
2
2X
0.48
1
3
4
2X (0.26)
5
4X 0.27
0.17
0.239
0.139
3X 0.288
0.188
0.1 M C A B
0.05 M C
(0.1)
0.05
0.00
NOTE 3

7.7 DSBGA(AG)

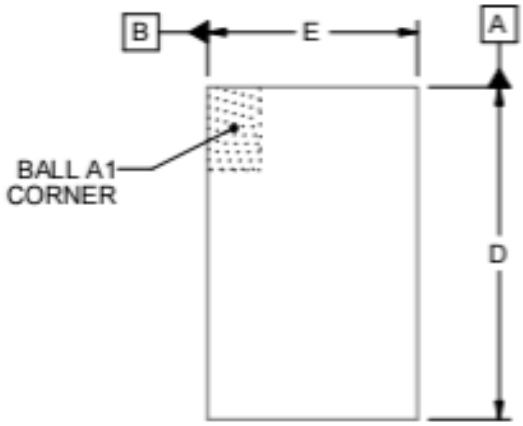

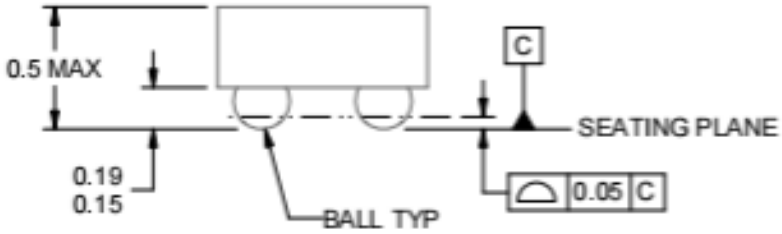


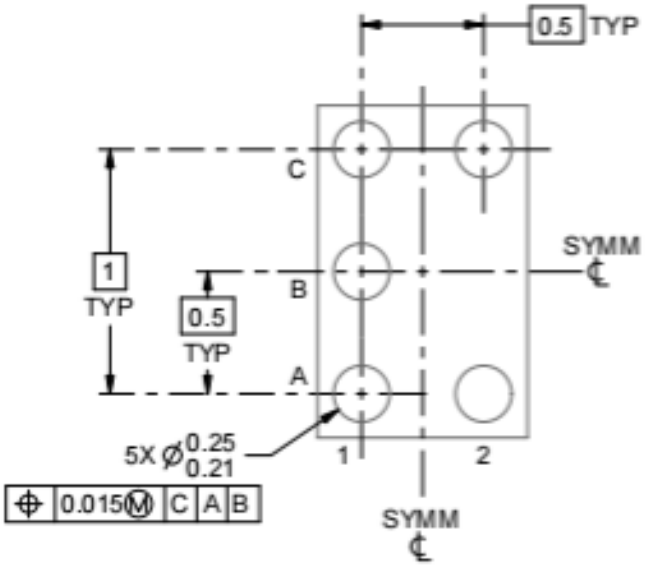



D: Max = 1.418 mm, Min =1.358 mm

E: Max = 0.918 mm, Min =0.858 mm

7.8 DSBGA(CG)

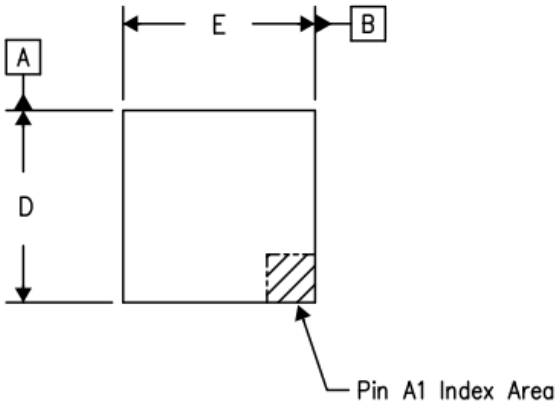

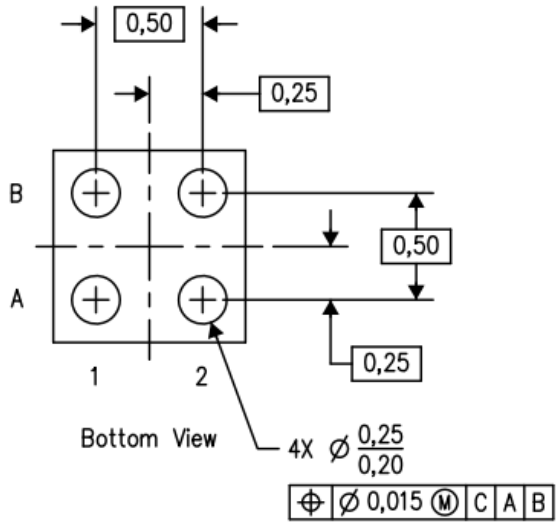

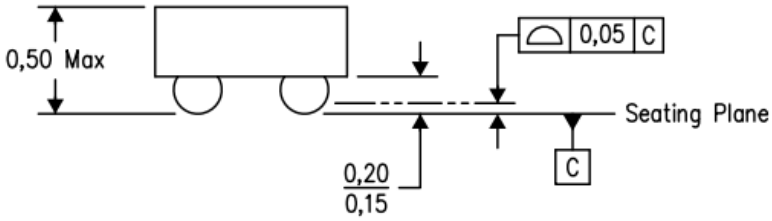

D: Max = 0.918 mm, Min =0.858 mm

E: Max = 0.918 mm, Min =0.858 mm

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

GR/æ±Ÿè‹•å›½ç•¿å¾®:

CD4098NS16ARDQ GR6219B302MR GR7033A GR2803LSS24ARCQ GR7150S GR7550HS CD4082NS14ARDQ MAX809S XL1509-ADJNS08ARBE CD4043NS16ARDQ GR5300A33M3G HT7533ST HT7550 LM2596S-ADJ 74HC08S 74HC595 CD4049NS16ARDQ GR6219B362MR CD4070S GR6208D GR6220B251MR-G PCF8574WS16ARAE GR61CN3002MR XL1509-5.0NS08ARBE 74HC153NS16ARDQ GR6206P182PR GR6220B181MR-G SA571TS16ARDQ GR7530 74HC32S