

标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

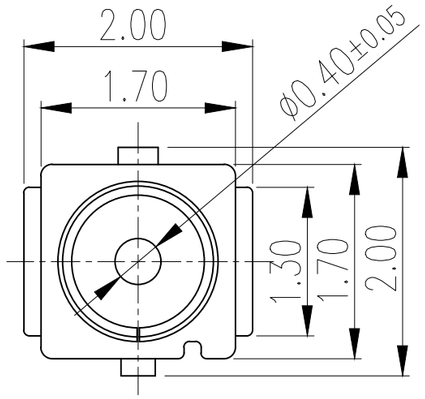


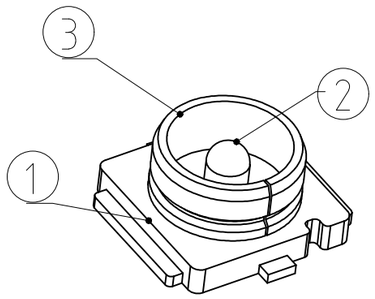


SCHEMATIC


3 (Ground PIN)


2 (SIGNAL PIN)



NOTES:
1. FREQUENCY RANGE:
   DC TO 6GHZ (VSWR: 1.3Max. AT 0.1~3GHZ,
   1.4Max. AT 3~6GHZ)
2. CHARACTERISTIC IMPEDANCE: 50Ω(NOMINAL);
3. TEMPERATURE: -40°C TO +90°C;
4. RATED VOLTAGE : 60VAC;
5. CONTACT RESISTANCE :
   20mΩ Max.(SIGNAL CONTACT)
   10mΩ Max.(GROUND CONTACT)
6. WITHSTAND VOLTAGE : 200VAC FOR 1 MINUTE ;
7. INSULATION RESISTANCE : 500MΩ Min. AT 100VDC;
8. THIS COMPONENT IS HALOGEN FREE.
9.THE HARMFUL MATERIAL OF THIS PART SHOULD BE COMPLIANCE WITH CCT DOCUMENT QW-QA-10.

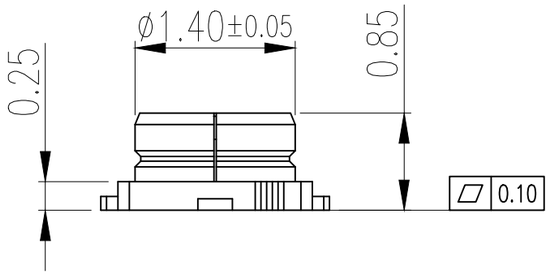

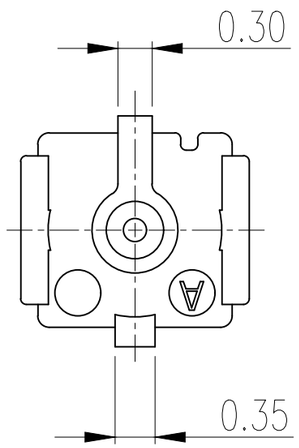

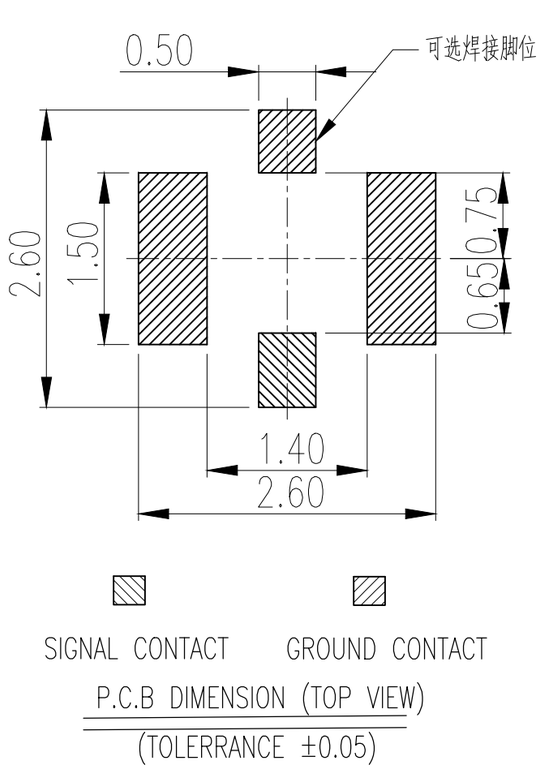

SIGNAL CONTACT GROUND CONTACT

P.C.B DIMENSION (TOP VIEW)

(TOLERRANCE ±0.05)

序 号	品 名	材 质	电镀/颜色	备 注
2	接触	铜合金	镀金/镀镍	
1	基座	LCP	黑色	

深圳市虹成电子有限公司		品 名 TITLE	连接器		
		料 号 PART NO	HC-IPEX0085-03		
GENERAL TOLERANCES (UNLESS SPECIFIED)	比 列 SCALE	1:1			
X.± 0.25 X.° ± 2°	单 位 UNIT	MM	制 图 DRAW	AhYe	
.X± 0.20 .X° ± 1°	张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云	
.XX± 0.15 .XX° ± 0.5°	版 本 REV	A	批 准 APPROVE	赵亮亮	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HC:

HCZZ0014-6 HC-PHB2.0-2x5A HC-PM200-4.3H-2x8PS HC-PM254-8.5H-1x21PZ HC-FPC-0.5-24P-FH20 HC-FPC-0.5-50P-FHH20 HC-PZ254-11.5L-2x18PZ HC-USB3.0-C34-P HCZZ0032-6 HCZZ0451-4 HC-FPC-0.5-40P-FH20 HC-PZ254-13.8L-1x6PWA HC-FPC-0.5-10P-FH20 HC-PZ127-7.2L-2x3PS HC-PZ200-8.2L-2x10PS HC-FPC-0.5-6P-CSH20 HC-PM254-5.0H-2x10PZ HC-PZ254-11.5L-1x20PZ HC-USB3.0-L257-J HCZZ0514-6 HCZZ0576-5 HC-PHB2.0-2x4AW HC-PM254-8.5H-2x20PS HCZZ0001-2 HCZZ0001-6 HCZZ0451-6 HC-PM200-4.3H-2x20PZ HC-PM200-4.3H-2x6PS HC-USB3.0-C26 HC-USB3.0-L175-2X1-J