


Inductive sensor

NCB50-FP-A2-C-P3-V1

- 50 mm flush
- 3-wire DC
- Weld Immune
- Optimum use at a distance >50 cm

Dimensions

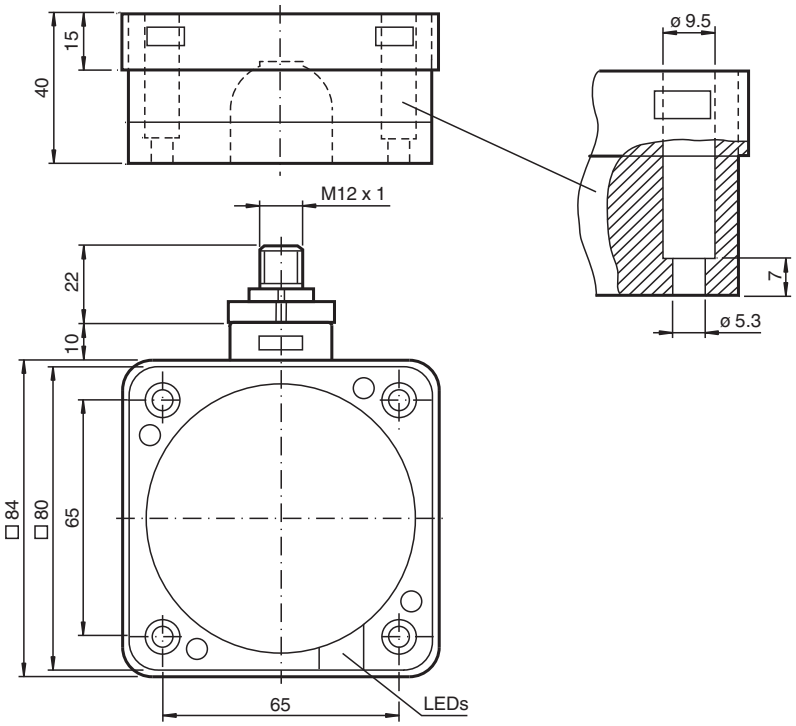

Technical Data


General specifications		
Switching function		complementary
Output type		PNP
Rated operating distance	s_n	50 mm
Installation		flush
Output polarity		DC
Assured operating distance	s_a	0 ... 40.5 mm
Reduction factor r_{Al}		0.38
Reduction factor r_{Cu}		0.35
Reduction factor r_{304}		0.83

Release date: 2024-05-28 Date of issue: 2024-06-07 Filename: 127200_eng.pdf

Technical Data


Output type		4-wire
Nominal ratings		
Operating voltage	U_B	10 ... 60 V DC
Switching frequency	f	0 ... 1 Hz
Hysteresis	H	typ. 3 %
Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing
Voltage drop	U_d	≤ 3 V
Operating current	I_L	0 ... 200 mA
Off-state current	I_r	0 ... 0.5 mA
No-load supply current	I_0	≤ 20 mA
Time delay before availability	t_v	≤ 1 s
Tuning-out		≥ 50 ms
Operating voltage indicator		LED, green
Switching state indicator		LED, yellow
Functional safety related parameters		
$MTTF_d$		660 a
Mission Time (T_M)		20 a
Diagnostic Coverage (DC)		0 %
Compliance with standards and directives		
Standard conformity		
Standards		EN IEC 60947-5-2
Approvals and certificates		
UL approval		cULus Listed, General Purpose
CCC approval		Certified by China Compulsory Certification (CCC)
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Mechanical specifications		
Connection type		Connector plug M12 x 1 , 4-pin
Housing material		PBT/metal
Sensing face		PBT, active surface PTFE coated
Housing base		metal
Degree of protection		IP68
Dimensions		
Height		40 mm
Width		84 mm
Length		84 mm

Connection



Release date: 2024-05-28 Date of issue: 2024-06-07 Filename: 127200_eng.pdf

Connection Assignment




Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

Mounting

These sensors are especially designed for embeddable mounting in conveyor floors. Due to its precise location in metal base plates the sensor is afforded a high degree of mechanical protection. No clearance is required between the sensor and the base plate, avoiding the need for protective guarding to prevent possible foot injury.

The large sensing range ensures positive detection, and thus provides consistent control and monitoring of the conveyor.

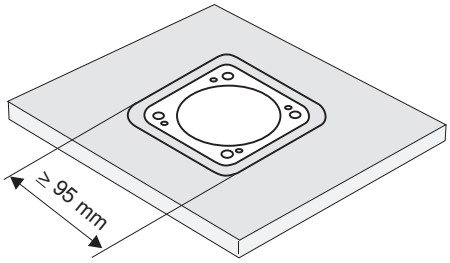

Warning!
Once the metal screening has been removed, the sensor can no longer be embeddable mounted.

Release date: 2024-05-28 Date of issue: 2024-06-07 Filename: 127200_eng.pdf

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

PEPPERL+FUCHS:

OQT150-R100-2EP-IO-V31-L UB2000-F42-E6-V15 WCS3-MH1 24772 GLV30-8-2500/47/73C
NBB0.8-5GM25-E2 OBR12M-R100-2EP-IO-V31-L BF18 NBB0.8-4M25-E0 NBB4-12GM50-A2-V1 134143
NBB5-18GM50-E2 MH4-2057 NBB1-4GM22-E2 NBB2-12GM50-A2-V1 NBB2-12GM50-E2 S1SD-1AI-1U.1
UB800-18GM40-I-V1 34441 CCN15-30GS60-E2-V1 NBB2-8GM40-E0-V1 NBB5-18GM50-A0
OBD450-18GK40A-E2 114642 NBB8-18GM50-E0 OBR2500-12GM40-E5 OBR5000-18GK40A-E2
OQT150-R101-2EP-IO-V31 UBE800-F77-SE2-V31 KLR-C02-2,2-2,0-K70