SPECIFICATION FOR APPROVAL

TO: _____

PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER			DELTA MODEL	10DBAG5U
ORDER P/N.	10DBAG5U			SAMPLE ISSUE DATE	

1. ELECTRICAL CHARACTERISTICS:

1-1. VOLTAGE RATING 100-250VAC

1-2. CURRENT RATING

A. AT 100-250VAC. 50°C ..... 10 A RMS Max.
B. AT 100-250VAC. 40°C ..... 11 A RMS Max.

1-3. OPERATING FREQUENCY..... 50/60 Hz

1-4. LEAKAGE CURRENT: EACH LINE TO GROUND

A. @115VAC 60Hz ..... 0.25 mA Max.
B. @250VAC 50Hz ..... 0.45 mA Max.

1-5. HIPOT RATING (FOR 2 SECONDS)

A. LINE TO GROUND 2250VDC
B. LINE TO LINE 1075VDC

1-6. TEMPERATURE RANGE: -25 TO +100 DEGREE C

1-7. MINIMUM INSERTION LOSS IN dB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	2	6	10	15	20	25	30	30	30
DIF. MODE dB	/	/	/	3	10	10	25	30	35

1-8. SAFETY : UL, cUL, ENEC15

REPORT BY	CHECKED BY	APPROVED BY		
			3	
			2	
			REV.1	

DELTA ELECTRONICS, INC.
186 RUEY KUANG ROAD, NEIHU. TAIPEI 114, TAIWAN, R.O.C.
TEL:886-2-87972088 FAX:886-2-87972120

SPECIFICATION FOR APPROVAL

TO: _____

PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER			DELTA MODEL	10DBAG5U
ORDER P/N.	10DBAG5U			SAMPLE ISSUE DATE	

2. PHYSICAL DIMENSIONS:

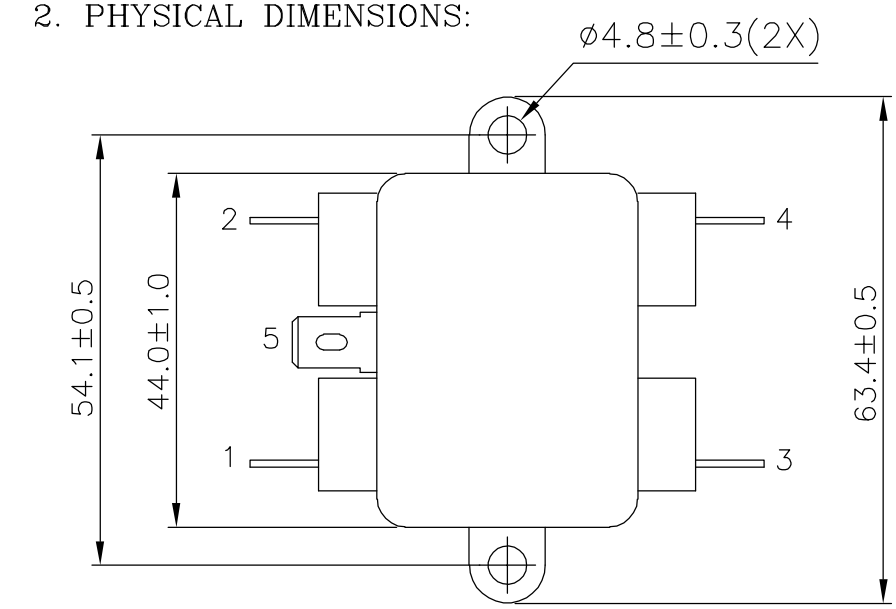

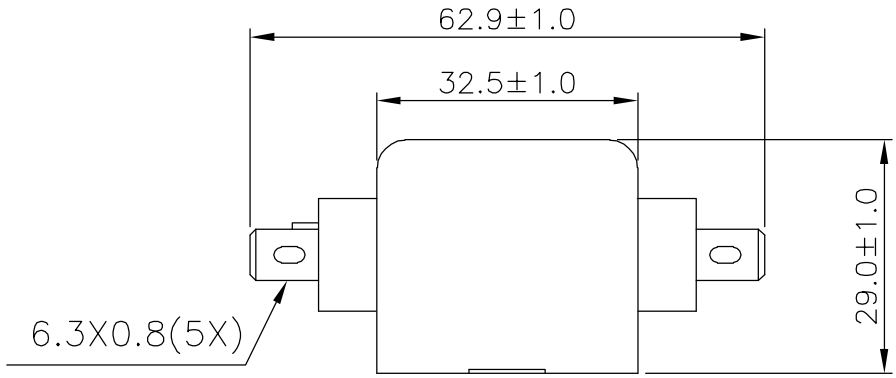

UNIT: mm

3. SCHEMATIC:

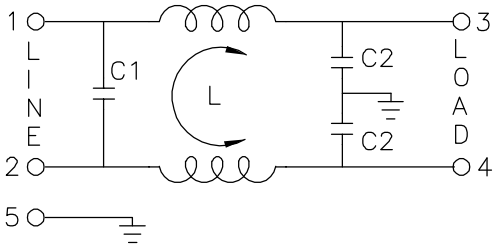

L: 1.6mH
C1: 0.1uF
C2: 3300pF

REPORT BY	CHECKED BY	APPROVED BY	UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCE DCEIMALS .X± .XX± ANGLES±
			REV. 99.08.30

DELTA ELECTRONICS, INC.
186 RUEY KUANG ROAD, NEIHU. TAIPEI 114, TAIWAN, R.O.C.
TEL:886-2-87972088 FAX:886-2-87972120

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

DELTA Electronics:

06AN2 30DPGS5C ACS3-CNTB0600 AFL12AUHE-C PM05S050A DSOL-1341-12 DTC1000C
M55339/14-00306 SK-1015-STD ASB02505SHA-AY6B FFB0912HHE PJT-12V40WBAA PMC-24V075W1AA
02BEEG3H 03GEEG3E AFB0524HHD AFB0724VH-AF00 BFB1248GH-A DSOL-0844-24
FFB0824SHE-F00 PFB1224UHEP0 06BEEG3G AFB0624VH-A MDS-400APB24AA S24SP05012PDFA
CTA4100A FFB1224SHE PMT-48V75W2BA PL01S4805A 15GENG3E