


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	INITIAL	19SEP2017	YC	CW

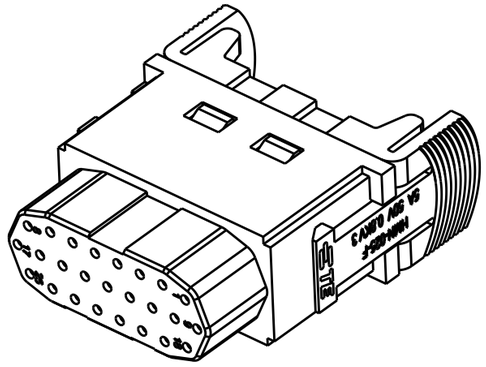


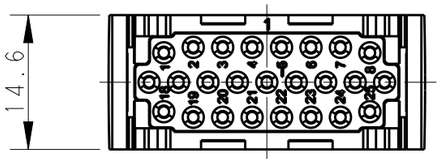

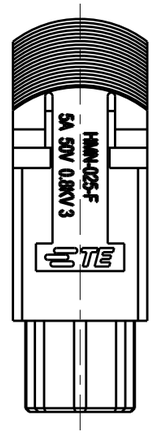

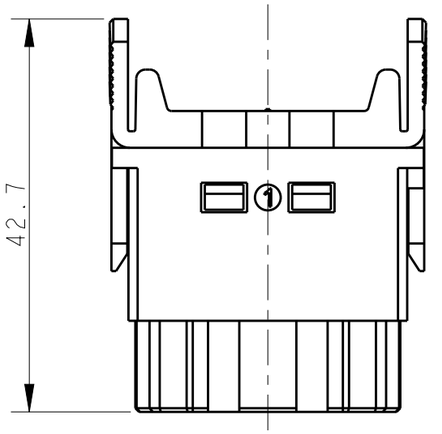

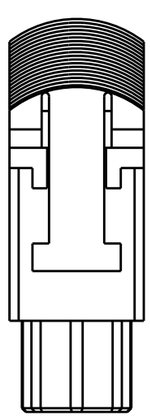



NOTES:
1. TECHNICAL CHARACTERISTICS:
   INSULATION MATERIAL: PC
   RATED VOLTAGE: 50V
   RATED CURRENT: 5A
   INSULATION RESISTANCE: >=400MΩ
   RATED IMPULSE VOLTAGE: 0.8KV
   POLLUTION DEGREE: 3
   FLAMMABILITY: UL94V-0
   MATING CYCLES: 500 CYCLES
   WIRE RANGE: 0.08~0.52 mm² (28~20 AWG)
   CONTACT TYPE: CRIMP CONTACT
2. CONTACT NEED TO BE ORDERED SEPARATELY.
   (ORDER No. REFER TO DRAWING:T20700X20XX000)

注释:
1. 技术参数:
   绝缘材料: PC
   额定电压: 50V
   额定电流: 5A
   绝缘电阻: >=400MΩ
   额定脉冲电压: 0.8KV
   污染等级: 3
   阻燃等级: UL94V-0
   插拔次数: 500次
   接线范围: 0.08~0.52 mm² (28~20 AWG)
   接线类型: 冷压接
2. 端子需要单独订购.
   (订货号参考图面: T20700X20XX000)

T2111252201-007	HMN-025-F	HMN-025 FEMALE MODULE INSERT HMN-025 模块母插
PART NUMBER 料号		PART DESCRIPTION 描述

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-
MATERIAL - -	FINISH - -

DWN YORK CHEN 19SEP2017
CHK GINO YAO 19SEP2017
APVD CHRIS WANG 19SEP2017
PRODUCT SPEC 108-137122
APPLICATION SPEC 114-137122
WEIGHT -

TE Connectivity

NAME HMN-025-F

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-T2111252201007	-

Customer Drawing

SCALE	SHEET	REV
3:2	1 OF 1	B

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1743455-2 175977-2 2-292161-3 CPF0402B37K4E1 RH73H2A40MKTN SMW73R0JT 2377783-2 650075-000 SBCHE154R7K 2310537-1 2380312-2 3-1393225-0 3430B2F51RTDF 3631B101LL ROX05SJ18R 2005330-1 936348-1 MPT100C18RF TE50BR39J U5254-000005-030PA 141991-2 1393431-1 SBCHE64R7K 1-794222-0 2834055-1 CRGCQ2010J3K3 1-962915-1 1903112-2 1969656-1 917696-1