
DWTC

Flexible, Dual Wall, Moisture-Proof, Heat-Shrinkable Polyolefin Tubing

Product Facts

- Excellent mechanical strength
- Abrasion resistance
- Excellent optical clarity
- Environmental sealing
- Shrink ratio 4:1
- RoHS compliant

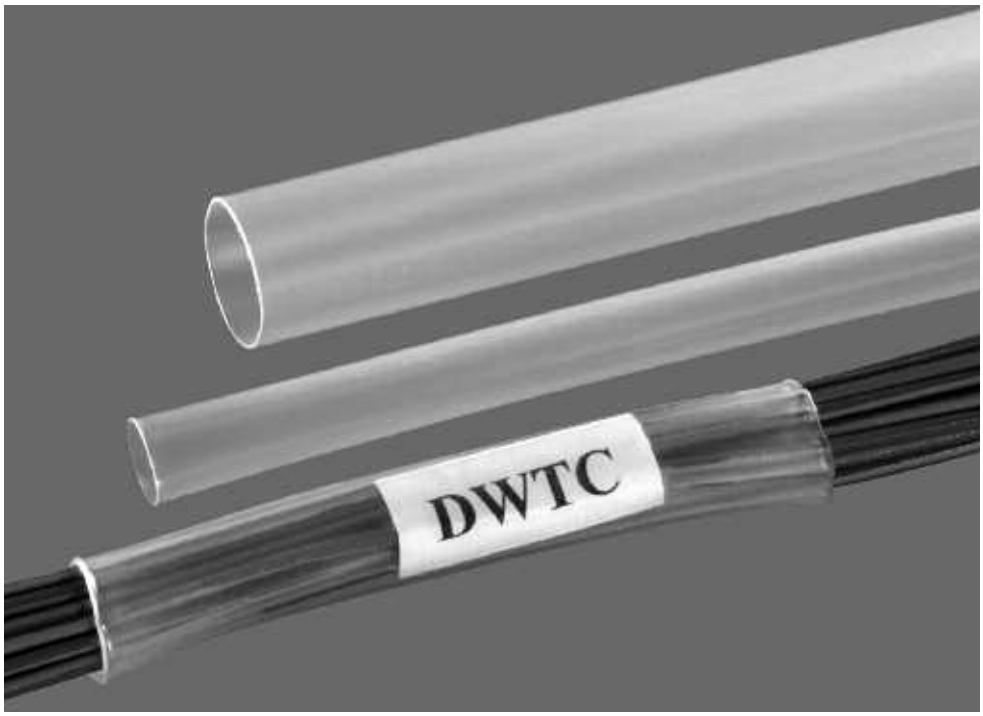

Applications

DWTC is a flexible, heat-shrinkable, dual wall tubing with an integrally bonded meltable adhesive inner liner designed to offer moisture proof encapsulation to a wide variety of substrates. In particular, it adheres well to PVC. Available in clear, DWTC offers excellent clarity for protection of substrates that may need to be inspected during service.

The tough outer jacket gives excellent mechanical strength with a high resistance to splitting. The high-shrink-ratio means that only four sizes are needed to give protection to a full range of irregular shapes with widely varying dimensions.

Installation

Minimum shrink temperature: 60°C [140°F]

Minimum full recovery temperature: 100°C [212°F]

Operating Temperature Range

-55°C to 75°C
[-67°F to 167°F]

Specifications/Approvals

Series	Raychem
DWTC	RK-6204

Available in:	Americas	Europe	Asia Pacific
		■	■

9-1773447-9
CIS WR 08/2011

te.com

Dimensions are in inches and millimeters unless otherwise specified. Values in brackets are metric equivalents.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-475-6222
Mexico: 52-55-1106-0800
L. & S. America: 54-11-4733-2200

Germany: 49-6251-133-1999
China: 86-400-820-6015
Japan: 81-44-844-8013
UK: 44-800-267-666

Downloaded from Arrow.com.

DWTC (Continued)

Product Dimensions

Size	Inside Diameter		Recovered Wall Thickness*	
	Minimum Expanded as Supplied	Maximum Recovered After Heating	Nominal Total Wall After Heating	Nominal Adhesive Wall After Heating
4/1	4.0 [0.158]	1.0 [0.039]	0.8 [0.032]	0.3 [0.012]
8/2	8.0 [0.315]	2.0 [0.079]	0.9 [0.035]	0.3 [0.012]
12/3	12.0 [0.472]	3.0 [0.118]	1.2 [0.047]	0.4 [0.016]
16/4	16.0 [0.630]	4.0 [0.158]	1.5 [0.059]	0.5 [0.020]

*Wall thickness will be less if tubing recovery is restricted during shrinkage.

Ordering Information

Color	Standard Clear (-X)
Size selection	Always order the largest size that will shrink snugly over the component to be covered.
Standard packaging	On spools, in 1.2-meter [4-foot] lengths.
Ordering description	Specify product name, size and color (for example DWTC-4/1-X-STK).

9-1773447-9
CIS WR 08/2011

te.com

Dimensions are in inches and millimeters unless otherwise specified. Values in brackets are metric equivalents.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-475-6222
Mexico: 52-55-1106-0800
L. & S. America: 54-11-4733-2200

Germany: 49-6251-133-1999
China: 86-400-820-6015
Japan: 81-44-844-8013
UK: 44-800-267-666

Downloaded from Arrow.com.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

SMV1W220KJT TE50BR39J CPF0402B37K4E1 ROX05SJ18R SBCHE64R7K 292206-2 1897725-2 1903112-2 2-520263-2 354022KFT 3631B101LL 917688-1 3-1447221-5 SBCHE154R7K T4133012081-000 2310537-1 1393454-9 HSHC4508K2J RH73H2A40MKTN U5254-000005-030PA 1-962915-1 2098557-4 282680-1 170376-2 2380312-2 HT-CT-50M-1-OUT-0 MPT100C18RF 175977-2 2-521104-2 2005330-1