


由 Autodesk 教育版产品制作


RoHS


MAPX	MODIFICATION	DATE



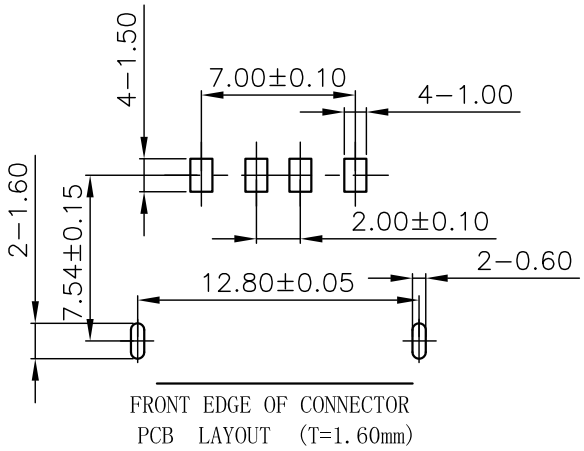

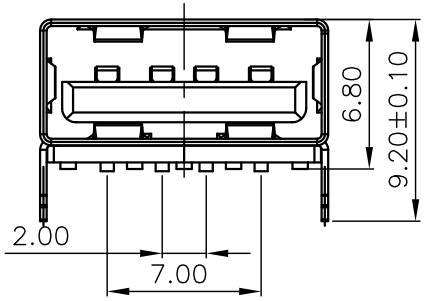

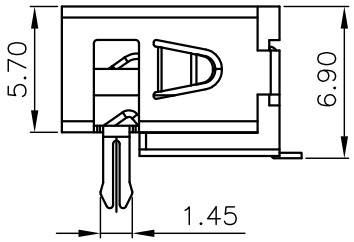

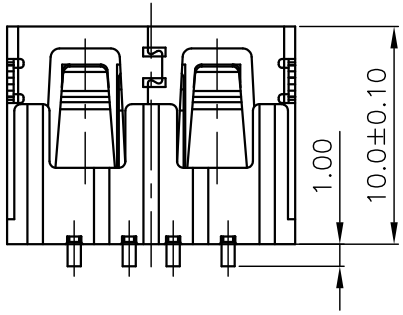

Note:
1.Material:
1.1,Housing: High temperature thermoplastic with/black G/F,UL94v-0
1.2,Contact: copper alloy,t=0.25mm
1.3,Shell: copper/Ferroalloy alloy,t=0.30mm
2.Specification:
2.1,Current rating:1.5A Max.
2.2,Dielectric withstanding voltage: 100 V(ac) for 1 min.
2.3,Contact resistance: 30 mΩ Max.
2.4,Insulation resistance: 100 MΩ Min.
2.5,Total mating force: 3.57 Kgf Max.
2.6,Total unmating force: 1.0 Kgf Min.
3.Finish:
3.1,Contact: Piated Golg in Mating Area: Tin On Solder Talls
Shell: Nickel Plating
4.Environmental:
4.1,Temperature range: -55°C~85°C

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERWISE

X.	±0.35	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.10	.XX	±1.°
.XXX	±0.05	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	910-161B2028S10100
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF10.0C款前两脚无边铁壳反向LCP黑胶6.8SMT
日期 DATE	2016-09-09	核准 APPD	黄国荣	角法 VIEW	版本 VER A0

由 Autodesk 教育版产品制作

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

920-154A2021Y10110 904-232A2031S10100 904-331B2032S10200 906-262A1021D10200
908-351A1011D10100 919-162A1012D10400 920-A62A2021S10108 920-A64A2091S101A3
905-761A2032S10200 906-552A1012D10200 920-F52A2021S10105 907-111A1022D10200
911-221A2021S10100 920-A62A2021S10104 920-C52A2021S10105 920-C62A2021S10103
912-112A2021S10100 912-312A1012D10100 917-P81A202ES60201 907-312A1101Y10210
910-151A2021D10100 912-112A1011D10100 918-415K3028S40000 918-418K2022Y40011
918-468K2029Y50000 906-752B1114D10200 917-B88C201AH70201 918-318K2023C40005
916-151A1022Y10200 904-232B2032S10100