EM2403 Series
EuroMag Terminal Blocks
Two Tier; 3.81 Centers; Modular



EM240308


EM240304

SPECIFICATIONS
Rating: 10A, 300V
Center Spacing: 0.150" (3.81mm)
Wire Range: #16-26 AWG
Housing Material: UL rated 94V0 Thermoplastic
Contact Material: Brass Tin-Plated
Cage Material: Brass, Nickel-Plated
Screw Size: M2.0 Zinc-Plated Steel
Operating Temperature: 105°C (221°F) max., -40°C (-40°F) min.
Torque Rating: 5.0 lb-in.
Recommended PCB Hole Diameters: 0.055" (1.40mm)
Construction: Modular design features dovetails for interlocking to achieve longer lengths
Agency Information: File E62622; CE Certified

Poles	L (mm)	Poles	L (mm)
2	9.53	8	32.39
3	13.34	9	36.20
4	17.15	10	40.00
5	20.96	11	43.80
6	24.77	12	47.60
7	28.58		

To convert to inches, divide by 25.4

Dimensions - mm (in)

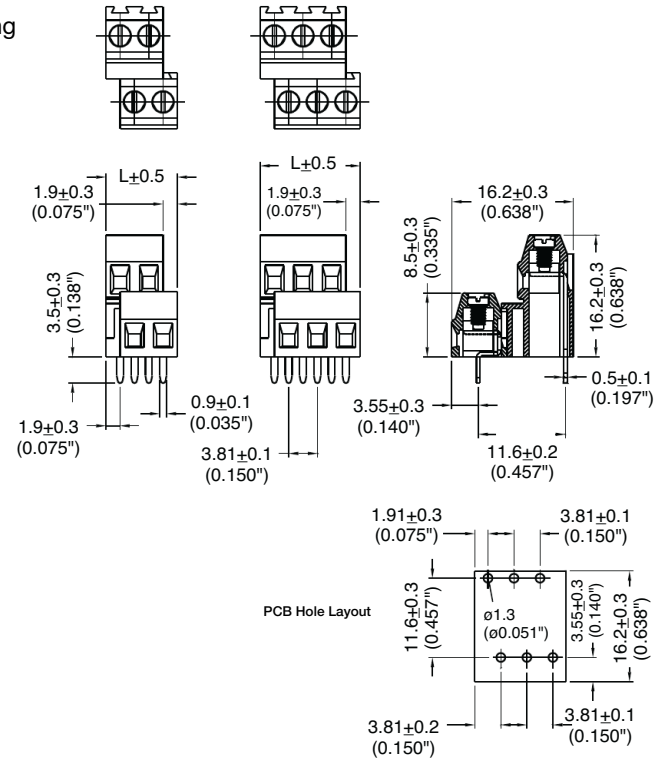

Part Numbering System

Series | **# of Poles**

EM2403 | ☐☐

02 - 12

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eaton:

EM240312 EM240308 EM240306 EM240307 EM240309 EM240305 EM240302 EM240310 EM240311 EM240304 EM240303