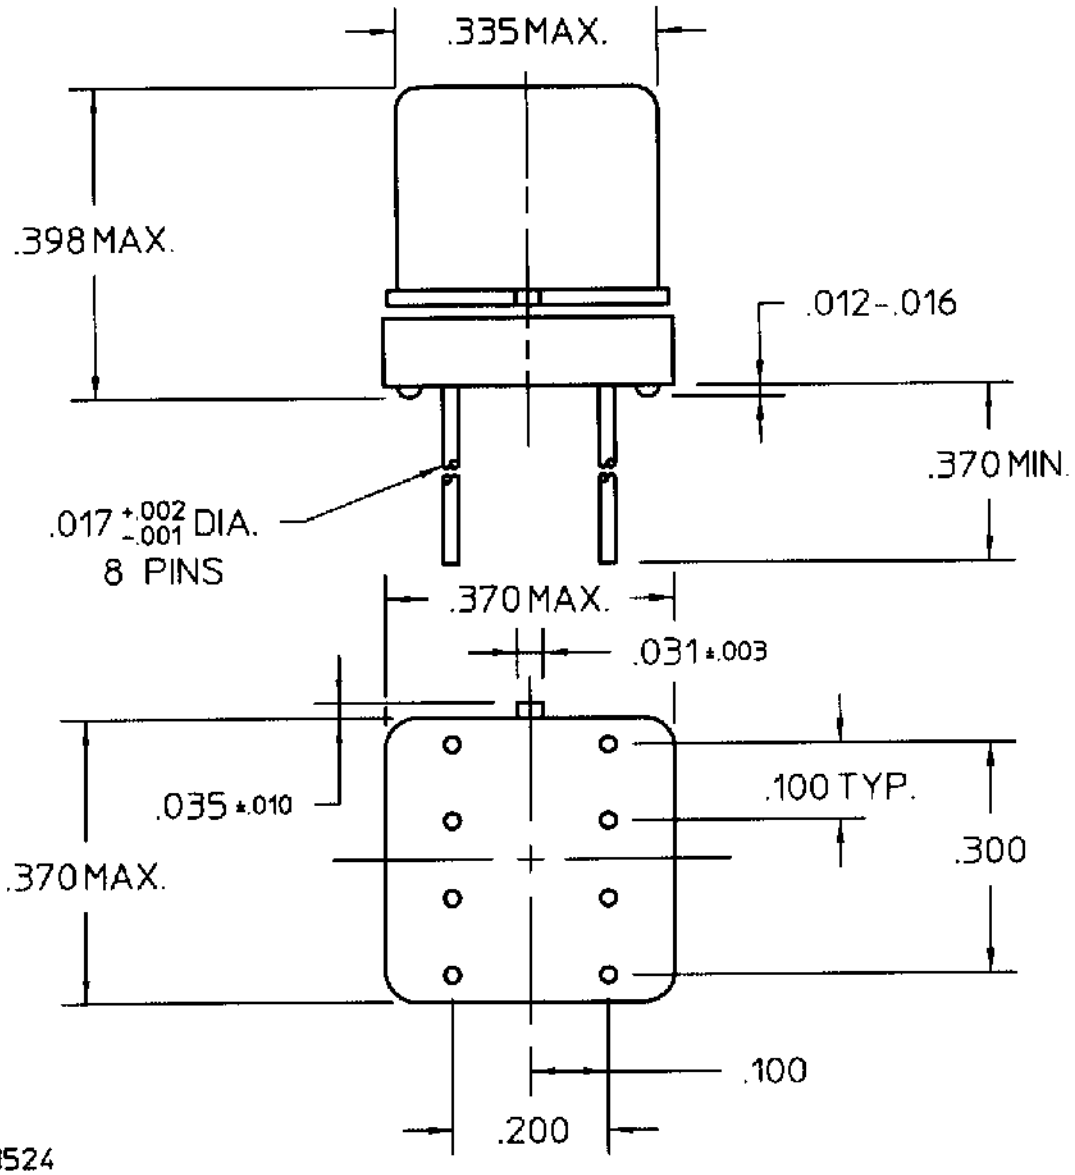


REV. 0

DCO 141524

COIL: @ 25°C

RESISTANCE 1560 OHMS ±10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 14.2 VDC

MUST RELEASE 8.0 VDC MAX, 1.37 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2 MS MAX
RELEASE TIME 1.5 MS MAX
CONTACT BOUNCE 1.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 11/16/99 CK JERRY C 11/16/99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C.I.I.

CUST. NO. STANDARD REV.

"PRMA" RELAY

PRMAC-26XS

F-778 REV. 2

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

SBCHE64R7K 2310537-1 2834055-1 U5254-000005-030PA 1903112-2 2-292161-3 2377783-2 2380312-2 CPF0402B37K4E1 RH73H2A40MKTN 1-962915-1 ROX05SJ18R 1743455-2 175977-2 3-1393225-0 CRGCQ2010J3K3 1-794222-0 2005330-1 3430B2F51RTDF 936348-1 MPT100C18RF SBCHE154R7K 141991-2 917696-1 SMW73R0JT TE50BR39J 1393431-1 1969656-1 3631B101LL 650075-000