




MAPX	MODIFICATION	DATE

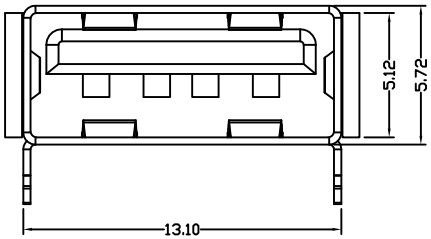


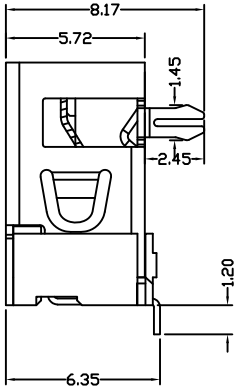


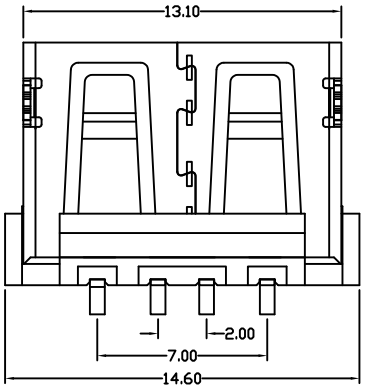



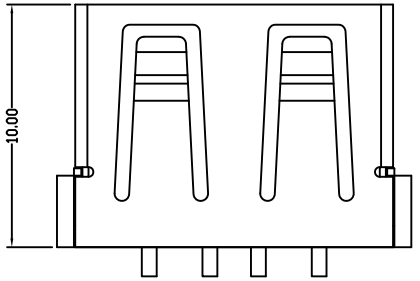

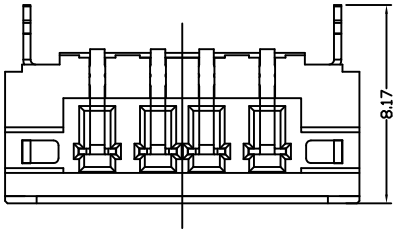

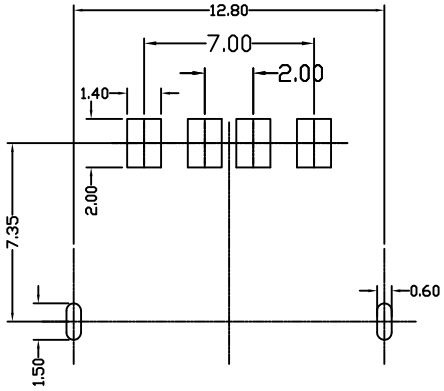

PCB HOLES

Specification:

1.Electrical Characteristics:

Dielectric Withstanding Voltage: AC 500V/1MINUTE.

Insulation Resistance: 1000 MΩ\Min.

Contact Resistance: 30 mΩ\ Max.

2.Mechanical Characteristics:

INSERTION FORCE: 30N(3.06Kgf) MAX

EXTRACTION FORCE: 10~30N(1.02~3.06Kgf)

Durability:1500cycles.EXTRACTION FORCE:10~30N(1.02~3.06Kgf)

3. Material:

Terminal: Phosphor Bronze, C5191R-H T=0.25

Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;

Shell: Phosphor Bronze, C5191R-H T=0.30mm

Plating: Nickel underplate 2.54 um Min;

Housing: 无卤LCP Black; UL94V-0

4.Environmental:

Operating Temperature: 0°C to +85°C.

产品图
PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERMSE			
X.	±0.15	X.	±5.°
.X	±0.10	.X	±2.°
.XX	±0.05	.XX	±1.°
.XXX	±0.03	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	914-122A2021S10200
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF10.0苹果款两脚鱼叉方弹铜壳 LCP黑胶SMT
日期 DATE	2011.09.02	核准 APPD		角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

908-351A1011D10100 912-312A1012D10100 917-B88C201AH70201 917-P81A202ES60201
910-151A2021D10100 911-221A2021S10100 912-112A2021S10100 904-232A2031S10100
905-761A2032S10200 906-552A1012D10200 907-111A1022D10200 920-A62A2021S10104
920-A62A2021S10108 918-468K2029Y50000 919-162A1012D10400 920-154A2021Y10110
904-331B2032S10200 912-112A1011D10100 918-415K3028S40000 918-418K2022Y40011
904-232B2032S10100 906-262A1021D10200 907-312A1101Y10210 916-151A1022Y10200
918-318K2023C40005 920-C52A2021S10105 920-C62A2021S10103 906-752B1114D10200
920-A64A2091S101A3 920-F52A2021S10105