



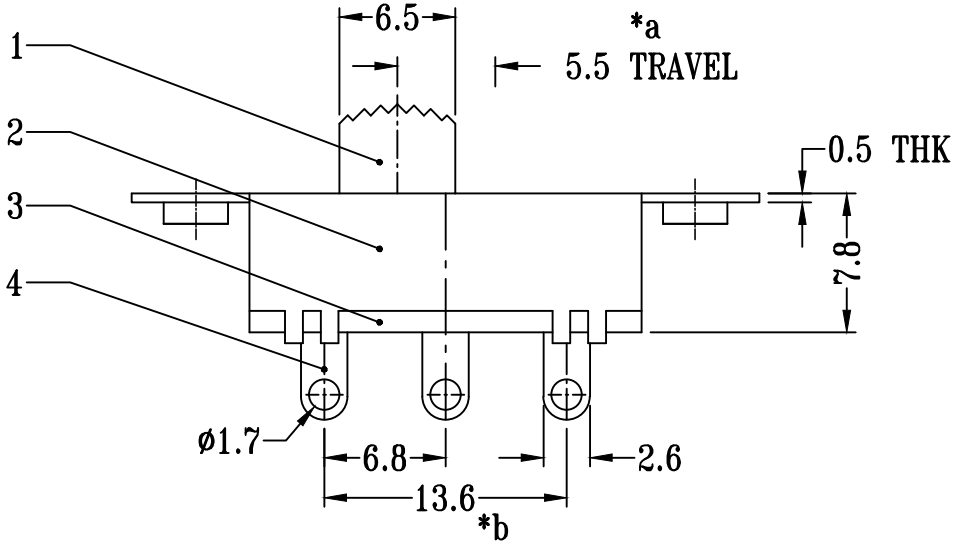


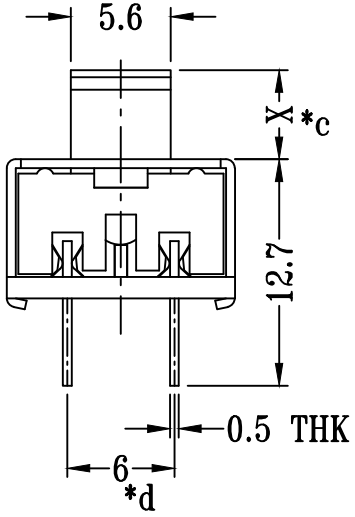

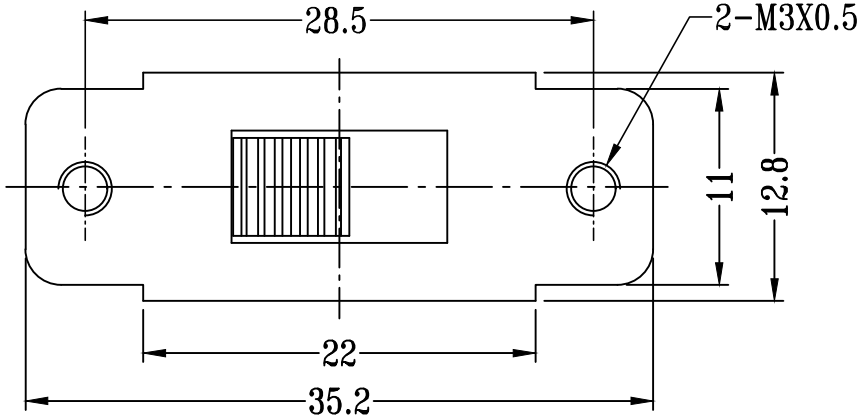

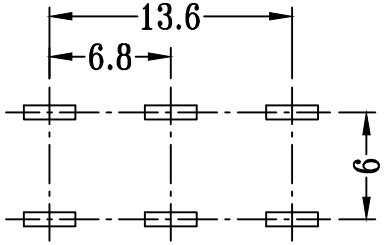

P.C.B LAYOUT
BOTTOM VIEW



SCHEMATIC (NON-SHORTING)

SS-22K25-GXXX

直柄 G-Switch P/N

G=020(2.0) G=030(3.0)
G=040(4.0) G=050(5.0)
G=055(5.5) G=060(6.0)
G=065(6.5) G=070(7.0)
G=075(7.5) G=080(8.0)
G=085(8.5) G=090(9.0)
G=095(9.5) G=100(10.0)

G-Switch Specification:
RATING（额定值） : DC250V 0.5A
CONTACT RESISTANCE 接触电阻：≤70mΩ
INSULATION RESISTANCE 绝缘电阻：≥100mΩ
DIELECTRIC STRENGTH 耐电压：AC 500V for 1 minute
TIMING （时间特性）:SHORTING

Pb Process Capable RoHS Compliant 2002/95/EC

Compliant Halogen Free

品赞科技 G-Switch

G-Switch Electronic Technology CO.,Ltd.

Unless otherwise specified, Tolerance: X. ±0.30 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 Angles ±3°	DESIGN 陈锋枫	DATE 2016.05.29	TITLE: SS-22K25-GXXX
	CHECKED	DATE	
	APPROVED	DATE	
	http://www.dg-switch.com	REV.: X1	SCALE: 4:1 UNIT: mm
	TEL:0769-82388879	SIZE: A4	SHEET: 1/1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

G-Switch:

GT-A1201WRS-106B1101 GT-F0502SR20-22SMT01 GT-F1010SR20-30SMT01 GT-TB092B-H090-L1 GT-TC108A-H034-L1 GT-F1007SR20-07S0101 GT-TC034A-H025-L1NB PS-5824SVA-6PN GT-F0509SR15-20SMT01 GT-F1009DV44-25BBT01 GT-TC102A-H095-L1 PS-7054DVB-6PN GT-A2501WVS-108SBT01 GT-F0512SR18-04S0101 GT-TB092B-H043-L1 GT-TC018A-H035-L1 GT-TC079A-H0040-L1 GT-TC101B-H070-L1 GT-TC129B-H043-L1 PS-8055SVA-6PNA GT-A1002WRS-112SBT01 GT-A2501WVS-103SBT01 GT-TC036B-H035-L1 GT-TC084E-H043-L5 GT-TC102A-H060-L1 GT-TC029B-H030-L1A GT-TC089A-H075-L1 GT-TC158D-H0575-L1 PS-5824DVA-4PN GT-A1257WVS-103SBT01