



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		INITIAL RELEASE	/	/
A2	N/A		图面升级整理图面	2025.10.14	阿树




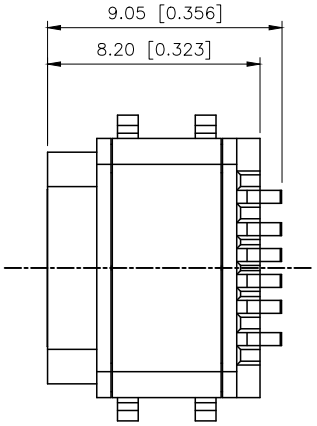






SPECIFICATIONS:
1. ELECTRICAL CHARACTERISTICS:
   1.1. RATING: 3A;
   1.2. CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
   1.3. DIELECTRIC WITHSTANDING: 100V AC MIN.;
   1.4. INSULATION RESISTANCE: 100MΩ MIN.;
2. DURABILITY: 10,000 CYCLES MIN.;
3. INSERTION FORCE: 5-20N;
4. EXTRACTION FORCE: 6-20N;
5. WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX7.
6. PLUG INTERFACE DIMENSIONS COMFORM TO USB2.0 SPEC.
7. PACKAGING: TAPE & REEL.

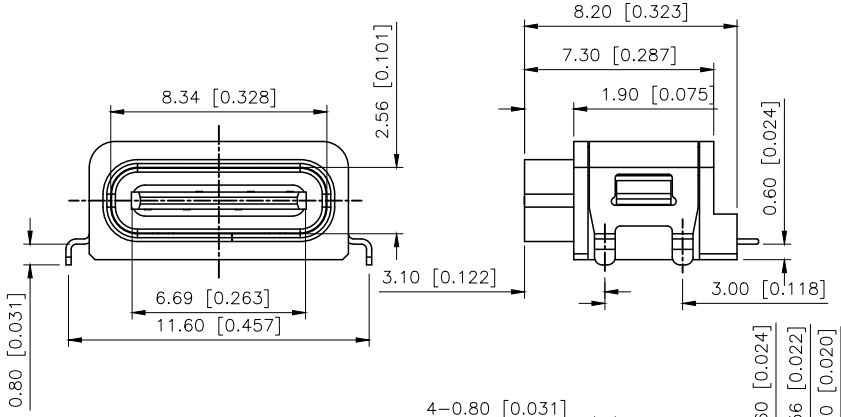

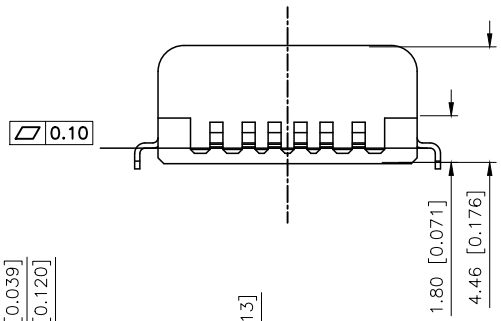

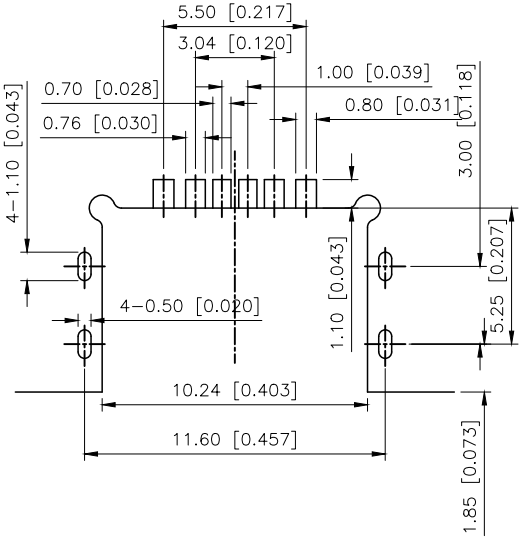

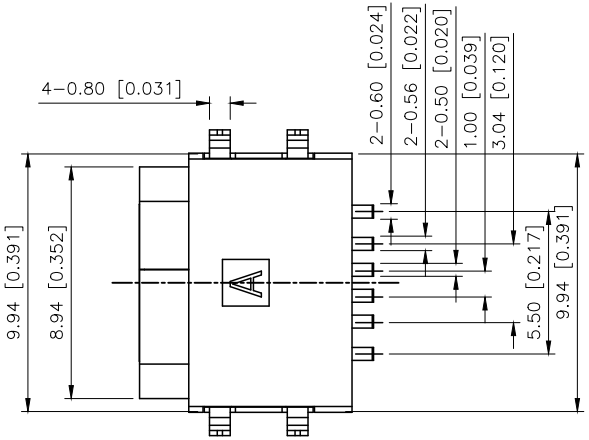

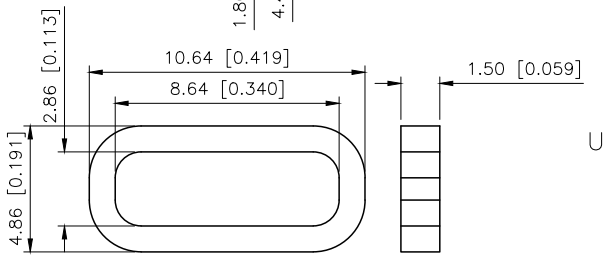

建议胶圈尺寸

U262-061N-5BF621
W:WHITE
B:BLACK
1:0.8u"
2:5u"

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NO.	PART NAME	QTY	FINISH
3	Shell	1	SUS304R-1/2H Ni PlatingT=0.25mm
2	Contact	6	Phosphor bronze C5191R-EH Au/Ni Plating T=0.20mm
1	Housing	1	PA10T (G.F30%%%)

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB 星创 Connection

DESIGN	阿树	VIEW:	MODEL TYPE: Type-C 3.1
CHECKED		UNIT: mm/in	PART NO.: U262-061N-5BF621
APPROVED		SIZE: A4	DWG NO.: X-U262-061N-5BF621

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1