SUNTSU

Ceramic SMT 4 Pad CMOS Oscillator

SXO32C Series


3.2mm x 2.5mm

Features

- ±20ppm (Frequency Stability) Available
- Ceramic Package
- CMOS
- Tape and Reel

Applications

- Micro Processors
- SONET/SDH/DWDM
- Storage Area/Networking
- Digital Video
- Base Stations



Part Numbering Guide

SXO 32 C 3 A 48 1 X - 30.000M

- **SUNTSU OSC**
- **3.2mm x 2.5mm**
- **CMOS**
- **SUPPLY VOLTAGE**
  - 1 : 1.8V±5%
  - 2 : 2.5V±5%
  - 3 : 3.3V±5%
- **FREQUENCY STABILITY**
  - A : ±50ppm
  - B : ±30ppm
  - C : ±25ppm
  - *D : ±20ppm
- **OPERATING TEMPERATURE RANGE**
  - 07 : 0°C - +70°C
  - 16 : -10°C - +60°C
  - 17 : -10°C - +70°C
  - 27 : -20°C - +70°C
  - 38 : -30°C - +85°C
  - 48 : -40°C - +85°C
- **TRI-STATE (ENABLE/DISABLE)**
  - BLANK : No Connection
  - 1: Pin 1
- **LOAD**
  - BLANK : 15pF
  - X : 30pF
  - Y : 50pF
- **FREQUENCY**
  - MHz

RoHS COMPLIANT

Cage Code : 4GUT4

To customize your parameters, contact a Suntsu representative.

* For Frequency stability option D, contact a Suntsu representative.

** For operating temperatures up to -55-125°C contact a Suntsu representative.

Electrical Parameters		Units	Minimum	Typical	Maximum	Remarks
Frequency Range		KHz	32.768			
Frequency Range		MHz	1		133	
Frequency Stability (Includes Initial Tolerance at 25°C, Frequency Stability over Operating Temperature, Output Load Change, Supply Voltage Change, and First Year Aging at 25°C.)		ppm	-20		+20	See part numbering guide for options
Operating Temperature		°C	-40		+85	See part numbering guide for options
Storage Temperature		°C	-55		+125	
Supply Voltage (V_{DD}) - 1.8V option		V	1.710	1.8	1.890	
Supply Voltage (V_{DD}) - 2.5V option		V	2.375	2.5	2.625	
Supply Voltage (V_{DD}) - 3.3V option		V	3.135	3.3	3.465	
	Frequency Range		**1.8V**	**2.5V**	**3.3V**	
Current (I_{DD})	32.768KHz	mA	3	5	5	Maximum Value
	1.0000MHz - 29.999MHz	mA	4	8	10	Maximum Value
	30.000MHz - 74.999MHz	mA	6	15	17	Maximum Value
	75.000MHz - 133.000MHz	mA	12	20	25	Maximum Value
Output Load (CMOS)		pF			15	See part numbering guide for options
Output Logic Levels High (V_{OH})		V	0.9*V_{DD}			
Output Logic Levels Low (V_{OL})		V			0.1*V_{DD}	
Rise (TR) and Fall (TF) Time	32.768KHz	ns			200	
	1.0000MHz - 29.999MHz	ns			10	
	30.000MHz - 74.999MHz	ns			8	
	75.000MHz - 133.000MHz	ns			5	
Symmetry (Duty Cycle)		%	45	50	55	
Tri-State Input Voltage - Enable		V	0.7*V_{DD}			No Connection
Tri-State Input Voltage - Disable		V			0.3*V_{DD}	
Start-Up Time		ms			10	
Phase Jitter (12kHz ~ 20MHz)		ps			1	

Suntsu Electronics, Inc.
142 TECHNOLOGY DR., SUITE 150
IRVINE, CA 92618

Call: +1-949-783-7300 | Fax: +1-949-783-7301

SUNTSU


Ceramic SMT 4 Pad CMOS Oscillator

SXO32C Series

3.2mm x 2.5mm


Outline Drawing & Land Pattern

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

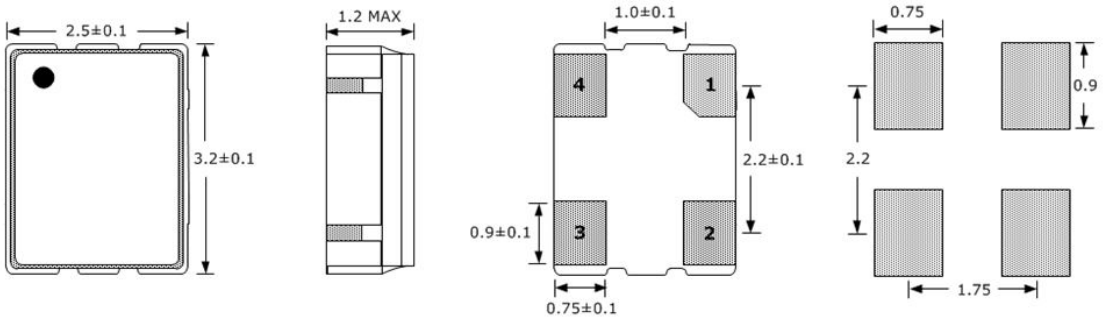


PIN	FUNCTION
1	TRI-STATE or NC
2	GND
3	OUTPUT
4	V_{DD}


Test Circuit (CMOS)

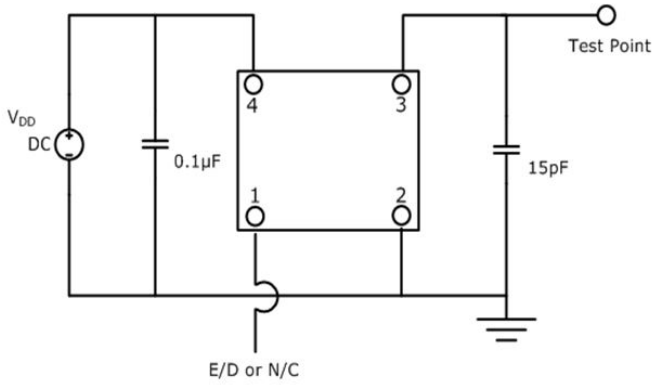


Waveform (CMOS)

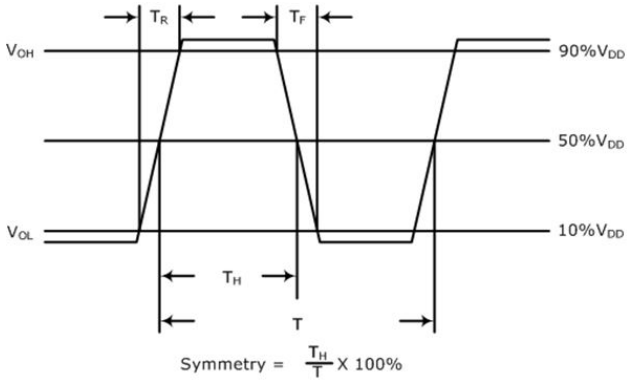

Typical Phase Noise Performance (Measured By Agilent E5052A)

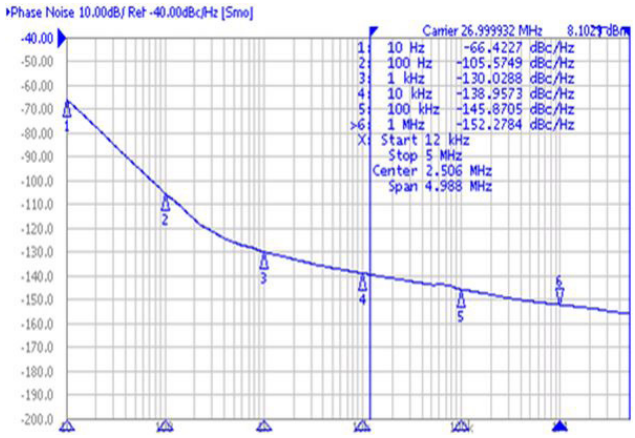

Frequency - 27.000MHz

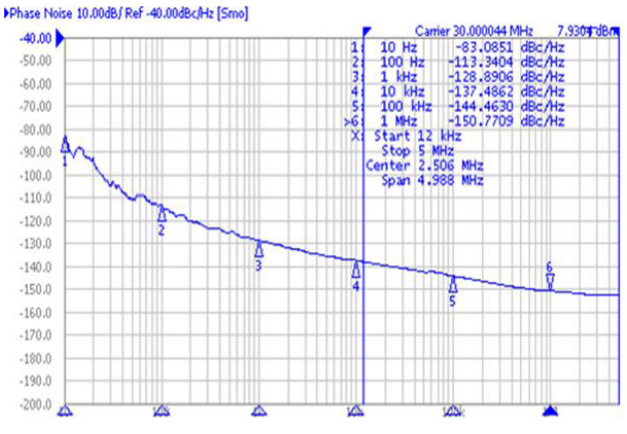

Frequency - 30.000MHz

www.suntsu.com

Specifications are subject to change without notice.

Suntsu Electronics, Inc.
142 TECHNOLOGY DR., SUITE 150
IRVINE, CA 92618

Call: +1-949-783-7300 | Fax: +1-949-783-7301


SUNTSU

Ceramic SMT 4 Pad CMOS Oscillator


SXO32C Series

3.2mm x 2.5mm

Typical Jitter Performance (Measured By Agilent E5052A)

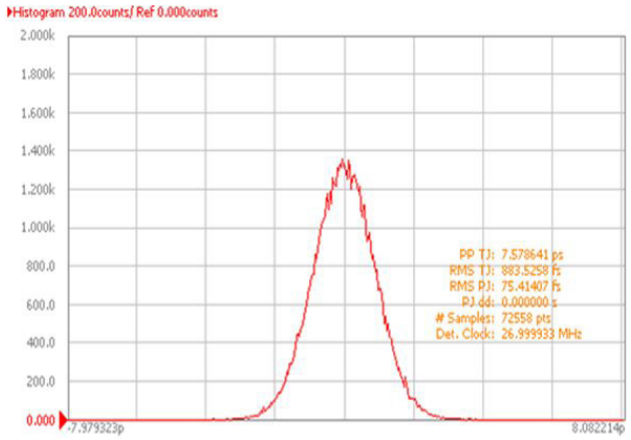


Frequency - 27.000MHz

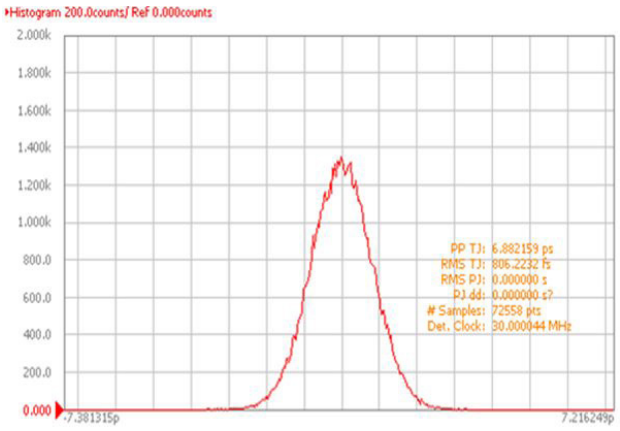


Frequency - 30.000MHz

Reflow Profile

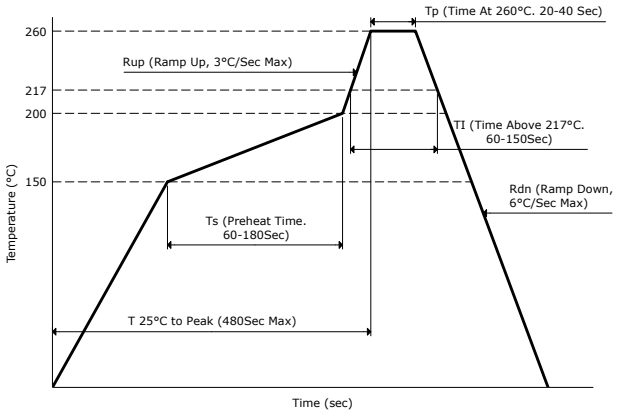


Part Marking

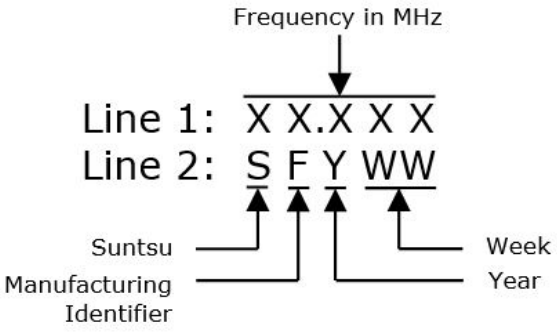

Tape And Reel Dimensions

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

3,000pcs/Reel

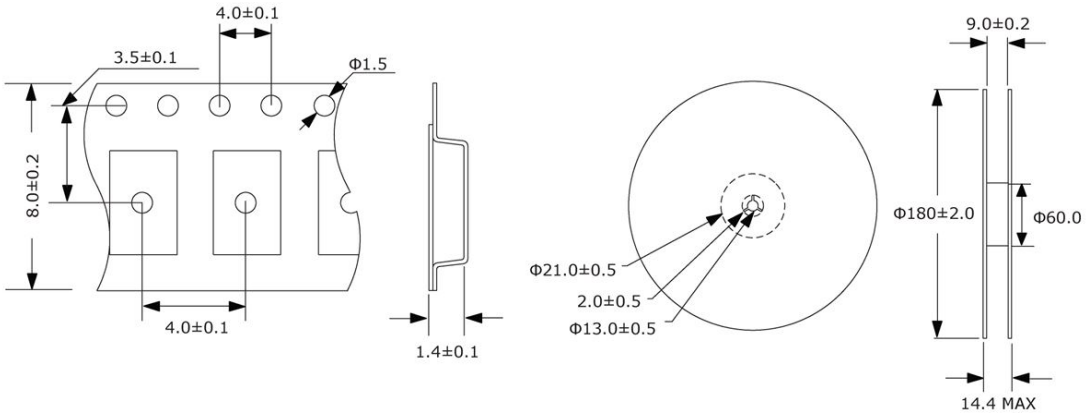

www.suntsu.com

Specifications are subject to change without notice.

Suntsu Electronics, Inc.
142 TECHNOLOGY DR., SUITE 150
IRVINE, CA 92618

Call: +1-949-783-7300 | Fax: +1-949-783-7301

Environmental Specifications		Mechanical Specifications	
Temperature Cycling	MIL-STD-883, Method 1010, Condition B	Mechanical Shock	MIL-STD-202, Method 213, Condition B
Fine Leak Test	MIL-STD-883, Method 1014, Condition A	Vibration	MIL-STD-883, Method 2007, Condition A
Gross Leak Test	MIL-STD-883, Method 1014, Condition C	Moisture Resistance	MIL-STD-883, Method 1004
Solderability	MIL-STD-883, Method 2003	Resistance to Solvents	MIL-STD-202, Method 215
Moisture Sensitivity	J-STD-020, MSL 1	Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition K

Suntsu Electronics, Inc.
142 TECHNOLOGY DR., SUITE 150
IRVINE, CA 92618

Call: +1-949-783-7300 | Fax: +1-949-783-7301

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Suntsu Electronics:

SXT21410FB48-24.576M SXT21412DC38-16.384M SXT22419CC38-16.384M SXTHM212FB164-25.000M
SXT21410FD16-30.000M SXT22418EE38-26.000M SXT2248FE17-38.400M SXT32418EE07-19.6608M
SXT21417CA27-26.000M SXT22417DD07-16.000M SXT22418FA38-12.288M SXT22419BA27-16.000M
SXT21410FB17-20.000M SXT32417CB48-20.000M SXTHM212DA384-24.000M SXTHM218DC174-12.000M
SXT32418FC07-50.000M SXT11411CA17-25.000M SXT11411DB38-27.120M SXT1148EA16-30.000M
SXT21410DD16-24.576M SXT21420BA27-48.000M SXT3248FA17-14.7456M SXT21410DD17-48.000M
SXT22412EE38-40.000M SXT2249BB27-48.000M SXT22412EE07-16.384M SXT22419BA17-20.000M
SXT32420CB16-19.200M SXT3248FD17-19.6608M