


ROHS

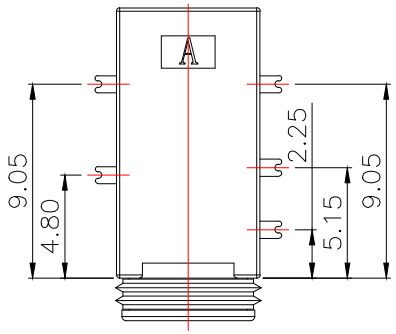






3D VIEW

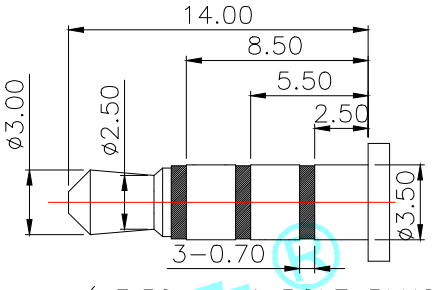

(ø3.50mm 4 POLE PLUG)

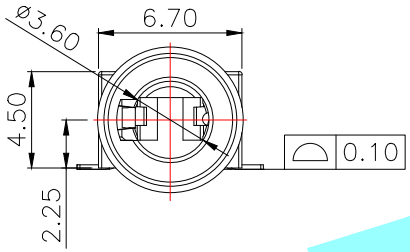


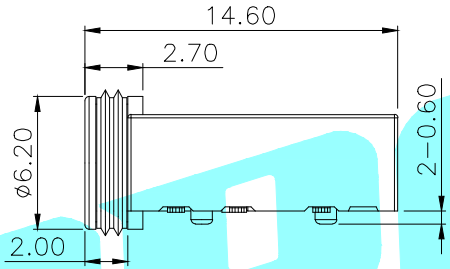


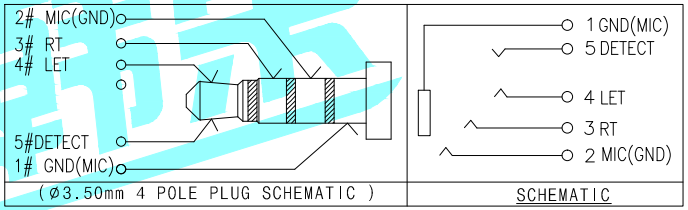

(ø3.50mm 4 POLE PLUG SCHEMATIC)

SCHEMATIC

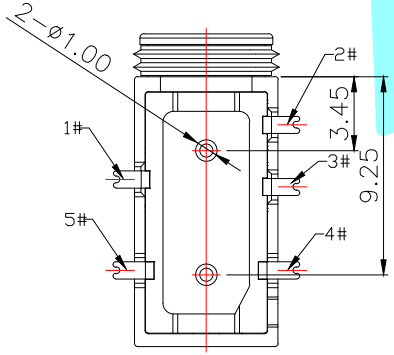

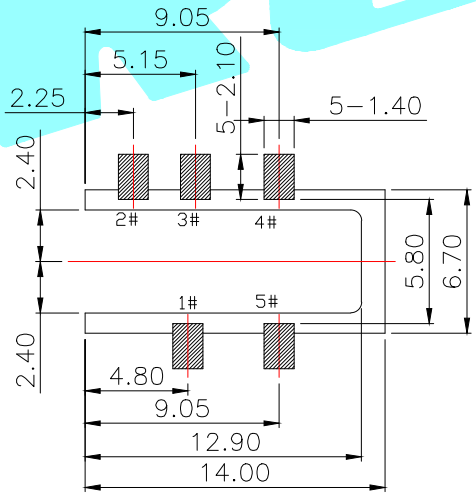

P.C.B LAYOUT(TOP view)

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;
8. TERPROOF LEVEL: IPX7;

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
③	Waterproof ring	——	1	Silica gel	——	——
②	Terminal	——	5	Phosphor bronze/SUS	Ni Plating	——
①	Housing	——	1	HTP	Black	——

APPROVALS		DATE	
DRAWN	LIUCAN	2021.04.27	HRD韩荣® ELECTRONICS CO.,LTD
CHECKED			TITLE: PHONE JACKES
APPROVALS			PART NO. PJ−621B

TOLERANCES ARE			ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	30~以上	±0.30				
	10~30	±0.20				
	5~10	±0.15	±2°	DRAWING NO.	——	SHEET 1 OF 1
	~ 5	±0.10				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

K2-1102DP-S3SW-04 K2-1818DP-A3SW-01 SS-22D03-G4 TYPE-C-31-M-04 U-F-M5DD-W-L U-M-M5DD-W-2 U-C-M5SS-Y-1 DA-10RP K2-1102SP-K4SC-04 DQ-03BP ES-07KP K5-1617SA-01 SIM-08A U-F-M5DD-Y-L U-F-M5DS-Y-1 K2-1102AT-A4CW-01 U-F-M5SS-W-5 U-F-M5DD-Y-L1 U-C-M5DW-W-1 DC-031A-10A K2-1101DF-A4DW-01 K2-1102BG-I4CW-01 K2-1102DP-G4SW-04 K3-1346S-F1 PJ-399B-6A DS-01BP K2-1102SP-A5SC-04 K3-2258S-E1 K8-5851D-L1 PJ-3250-5A