

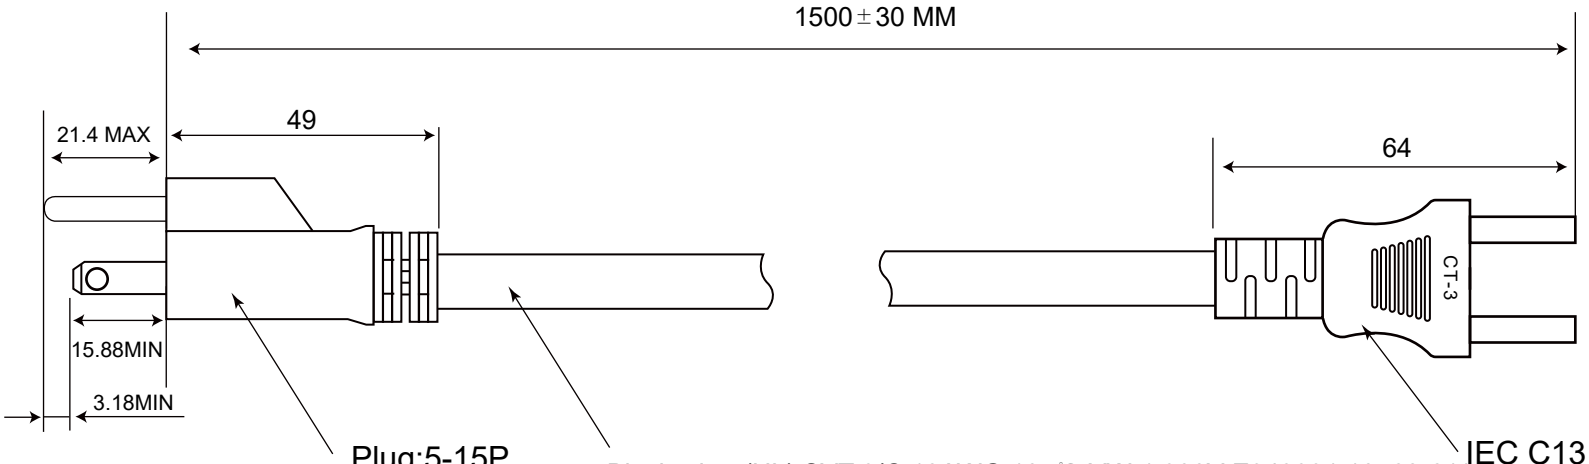


Logo illustration




Wire cross-section structure



Skills Requirement:

1. The polarity of the plug must be correct, all copper nickel-plated inserts, in line with UL standards
2. If the terminal is crimped and does not fall off, crimp it as required, pass the pull-out force test, and there is no defect such as loose wire.
3. Keep the wire length correct, the surface is free of scratches, burrs, black, and the winding size meets the requirements, SVT, 18AWG, 3/C,
4. All materials need to be environmentally friendly



Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Edgelight:

WLM-LED-ABS-12V-038030 WLM-LED-ABS-12V-044041 ALS-24V-1W23-OS3030-156-3-ZJ1025
WLM-LED-ABS-12V-078018 WLM-LED-ABS-24V-093032 WLM-LED-ABS-12V-041036
WLM-LED-ABS-12V-052018 WLM-LED-ABS-12V-074048 XC-PC-3UL-BP-1500-3*0D75 AD-EL-2401200-Z