
REV.	DATE	ECR NO.	DESCRIPTION
NC	07/30/09	XXXXXX	INITIAL RELEASE

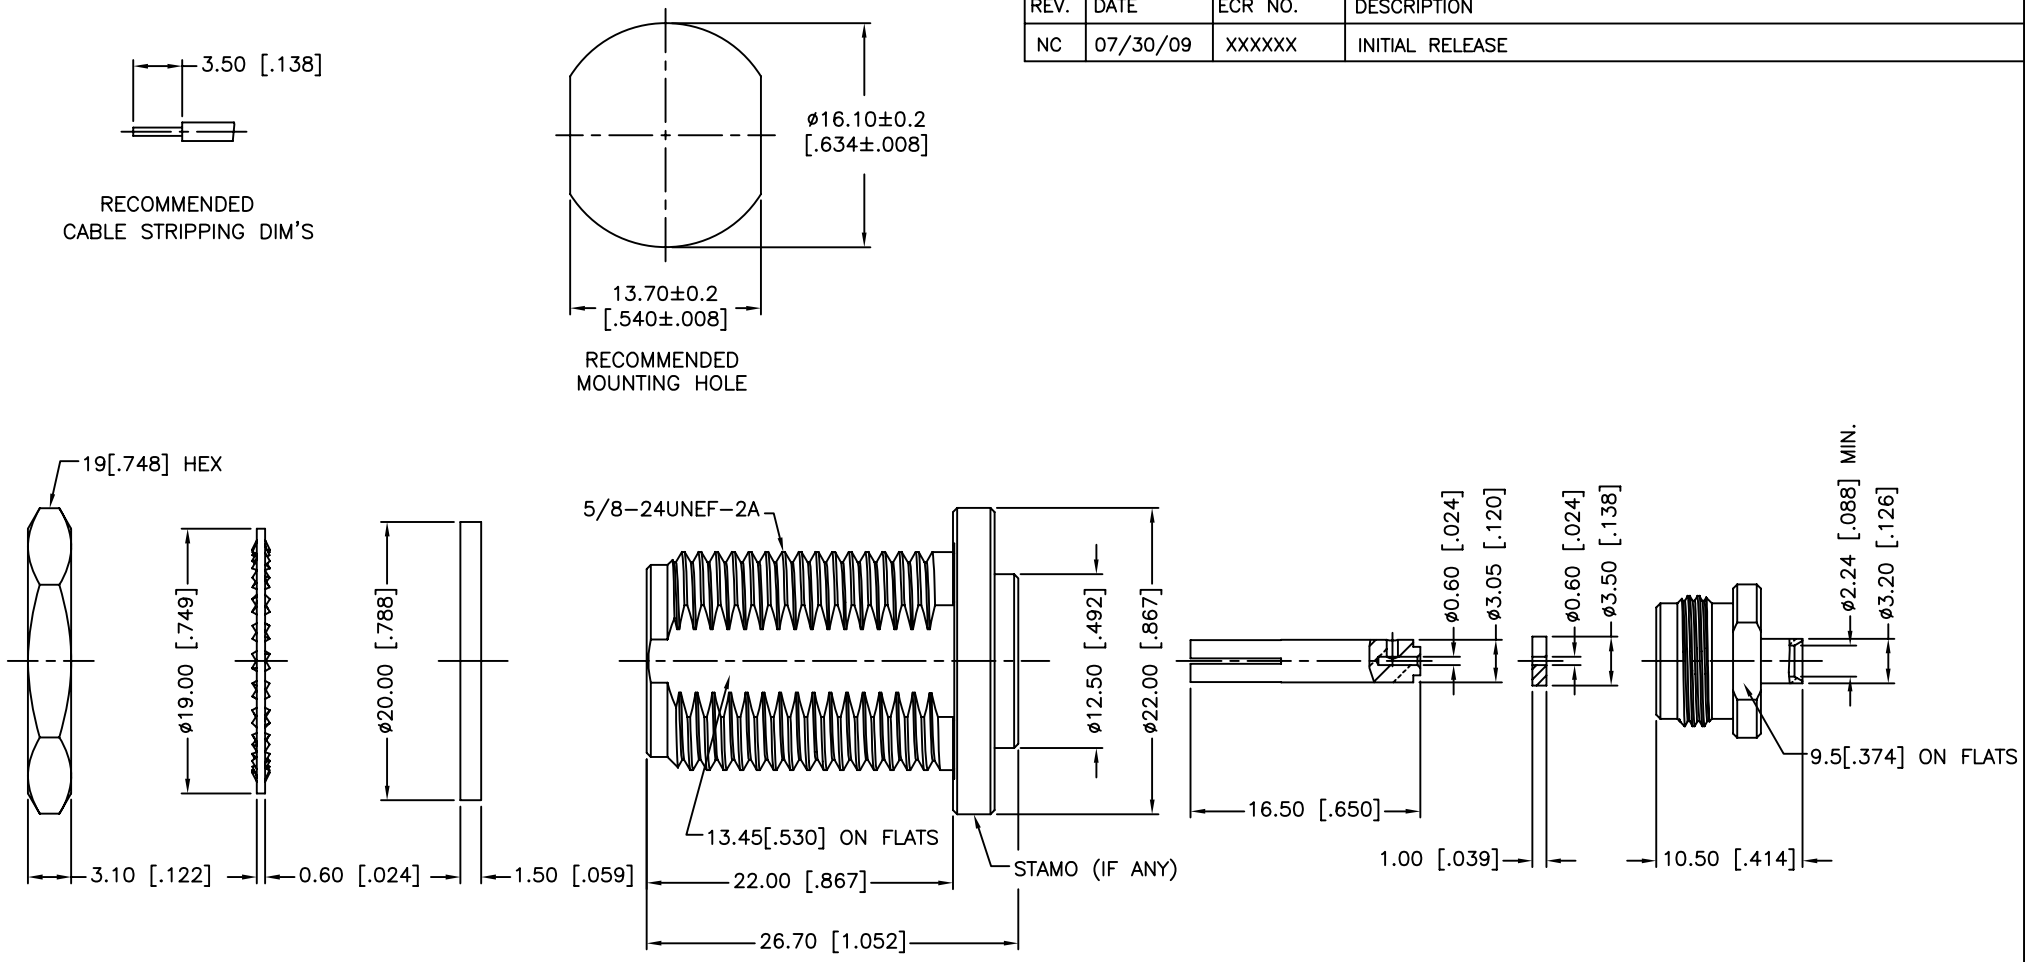

1. CONTACT PIN TO SILDER
2. MAX PANEL THICHKNESS: 6.5 mm

	DESCRIPTION	MATERIAL	FINISH	QTY
9	HEX NUT	BRASS	NEXCOTE	1
8	LOCK WASHER	BRASS	NEXCOTE	1
7	GASKET	SILICONE	RED	1
6	SOLDER NUT	BRASS	GOLD	1
5	INSULATOR	PTFE	NATURAL	1
4	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
3	INNER BODY	BRASS	NEXCOTE	1
2	INSULATOR	PTFE	NATURAL	1
1	OUTER BODY	BRASS	NEXCOTE	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	07/30/09
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/CONNEX/172138.DWG

Amphenol Connex

PART DESCRIPTION
N BULKHEAD DIRECT SOLDER JACK
(FOR .085",.086" CABLE)

PART NO. 172138

DWG. NO. 172138.DWG | REV. NC | SIZE A | SCALE NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

54202-G0805CLF 86093967896755LF 86093968813H45V1LF RJE061661210 86093968191755E3LF 91614-403ALF LD15P33E4GV00LF LD25S33E4GV00LF RJSBE5080C2 68001-200HLF 70430-164LF D15P13A6RV12LF DEM09P032N 68001-108HLF 68002116HLF 70218-1116LF 863013A 95157-140LF DCMF37P 70234-112LF 86130202123355E1LF 69192-408HLF 54202-S08-07LF 65781-158 67996-204HLF 68000-236HLF 76384-316LF 86093488314745V1LF CD15S13E4RV09LF DAPO15S365TLF