

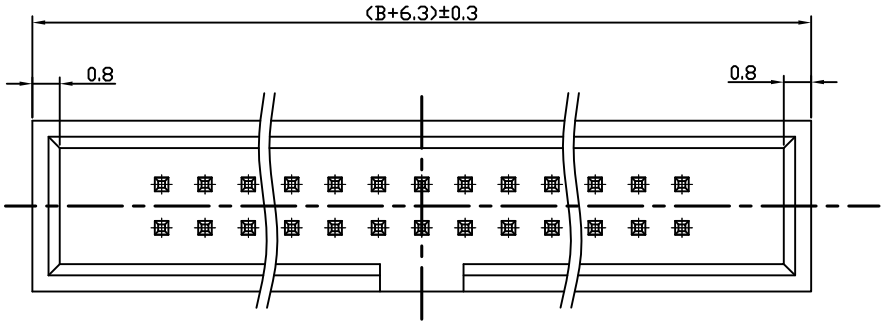


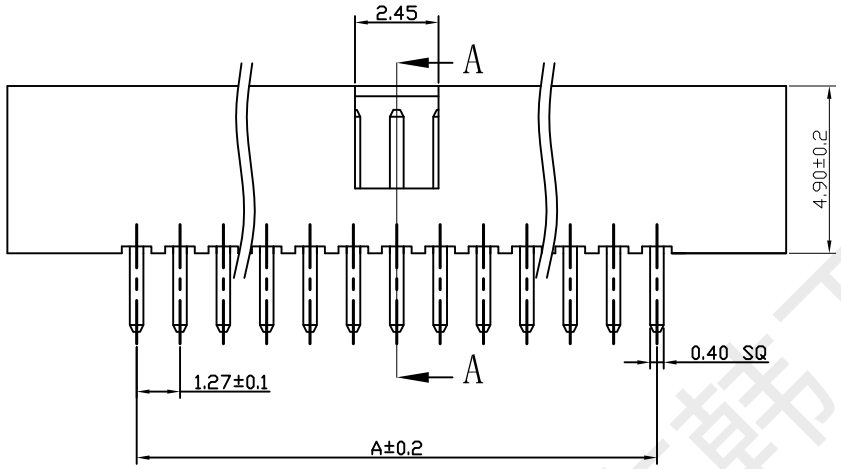




A-A SECTION

SPECIFICATIONS

Current Rating: 1.0 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Operation Temperature: -40° to+105°
Insrlator Material: Polyester(UL94V-0)
Contact Material: Brass
Standard: PA6T
Contact Plating: Gold Flash
Max.Processing Temp: 240° C for30-60seconds
(260° C for5seconds)



RECOMMEND P.C.B LAYOUT
PCB TOLERANCE:±0.05 (TOP VIEW)

No.of	DIM.A	DIM.B	No. of	DIM.A	DIM.B	No. of	DIM.A	DIM.B
—	—	—	22	12.70	13.97	42	25.40	26.67
—	—	—	24	13.97	15.24	44	26.67	27.94
6	2.54	3.81	26	15.24	16.51	46	27.94	29.21
8	3.81	5.08	28	16.51	17.78	48	29.21	30.48
10	5.08	6.35	30	17.78	19.05	50	30.48	31.75
12	6.35	7.62	32	19.05	20.32	52	31.75	33.02
14	7.62	8.89	34	20.32	21.59	54	33.02	34.29
16	8.89	10.16	36	21.59	22.86	56	34.29	35.56
18	10.16	11.43	38	22.86	24.13	58	35.56	36.83
20	11.43	12.70	40	24.13	25.40	60	36.83	38.10

韩下 HANXIA® 深圳市韩下电子有限公司

UNLESS OTHEWIXE SPECIFIED TOLERANCE
X :±0.30 X° :±5°
X.X :±0.25 X.X° :±1°
X.XX:±0.20 X.XX° :±0.5°

DRAWM NAME: HX JN1.27-2x3P ZZ H4.9

SIZE	A4	SCALE	N:1	PROUCT NO.			
REV	A	UNIT	mm	PROJECT		PAGE	1/1

DRAW:	黄彬	2023/11/09	CHECKED:	张伟	2023/11/09	APPROVED:	罗小春	2023/11/09

深圳市韩下电子有限公司

深圳市韩下电子有限公司
Shenzhen Hanxia Electronic Co., Ltd
Tel: 0755-23086569

承　认　书

SPECIFICATION FOR APPROVAL

产 品 编 码
Material code: _____

产品名称 Project：简牛

规格型号 Part No：HX JN1.27-2x3P ZZ H4.9

贵公司承认印 Approal slgnatures

料 号/Part No.	签　章/Signatures

日期 Date:

拟制/Drawn	黄彬	深圳市韩下电子有限公司 工程专用章
审核/Check	张伟	
批准/Approved	罗小春	

深圳市韩下电子有限公司