muRata

Chip EMIFIL®Chip 3-terminal Capacitor for Large Current for General

NFM21PC225B0J3_ (0805, 2.2uF, DC6.3V)

_: packaging code

Reference Sheet

1.Scope


This product specification is applied to Chip EMIFIL®Chip 3-terminal Capacitor for Large Current used for General Electronic equipment.

2.MURATA Part NO. System


(Ex.)

NFM	21	PC	225	B	0J	3	D
	(1)L/W Dimensions	(2)Features	(3)Nominal Capacitance	(4)Temperature Characteristics	(5)DC Rated Voltage	(6)Electrode	(7)Packaging Code

3. Type & Dimensions

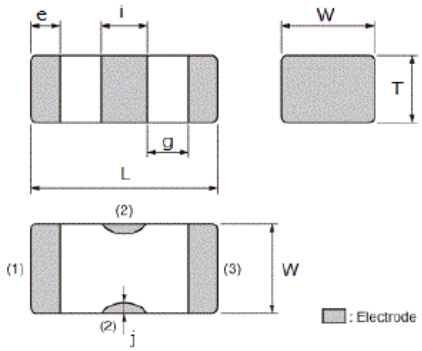

a)Equivalent Circuit

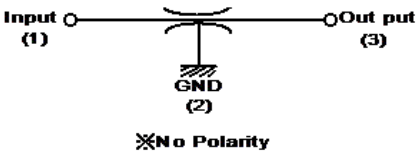

(Unit:mm)

(1)-1 L	(1)-2 W	T	e	g
i	j			
2.0±0.2	1.25±0.1	0.85±0.1	0.3±0.2	0.4±0.2
0.6±0.2	0.25±0.2			

4.Rated value

(3) Nominal Capacitance	Capacitance Tolerance	(5) DC Rated Voltage	Rated Current (mA)	DC Resistance	Insulation Resistance	Specifications and Test Methods (Operating /Storage Temp. Range)
2.2 uF	±20 %	DC 6.3 V	4A(DC)	20mΩmax.	200MΩmin.	-40 to 85 °C / -55 to 125 °C

5.Package

mark	(7) Packaging	Packaging Unit
D	ϕ180mm Reel PAPER W8P4	4000 pcs./Reel

Product specifications in this catalog are as of Mar.3,2016,and are subject to change or obsolescence without notice.
Please consult the approval sheet before ordering.
Please read rating and !Cautions first.

■SPECIFICATIONS AND TEST METHODS

Electrical Performance

No	Item	Specification	Test Method
1	Capacitance (Cap.)	Shown in Rated value.	Frequency : 1.0±0.1kHz Voltage : 1±0.2V(rms)
2	Insulation Resistance(I.R.)		Voltage : Rated Voltage Time : 2 minutes max.
3	DC Resistance		Measured with 100mA max.
4	Withstanding Voltage	Products shall not be damaged.	Test Voltage : Rated Voltage x 300% Time : 1 to 5 s Charge Current : 50 mA max.
5	Operating Temperature	Shown in Rated value.	Includes self-heating
6	Storage Temperature		



Standard Testing Condition

< Unless otherwise specified >
Temperature : Ordinary Temp. / 15 °C to 35 °C
Humidity: Ordinary Humidity / 25 %(RH) to 85 %(RH)

< In case of doubt >
Temperature: 20 °C ± 2 °C
Humidity: 60 %(RH) to 70 %(RH)
Atmospheric pressure: 86 kPa to 106 kPa

■SPECIFICATIONS AND TEST METHODS

Mechanical Performance
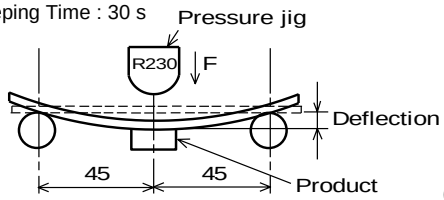
<table>
<tr><th>No</th><th>Item</th><th>Specification</th><th>Test Method</th></tr>
<tr><td>1</td><td>Appearance and Dimensions</td><td>Appearance:No defects or abnormalities.
Dimensions:Within the specified dimensions.</td><td>Appearance:Visual inspection.
Dimensions:Using calipers.</td></tr>
<tr><td>2</td><td>Solderability</td><td>Electrodes shall be at least 90% covered with new solder coating.</td><td>Flux : Ethanol solution of rosin, 25(wt)%
Pre-heat : 150±10°C, 60 to 90s
Solder : Sn-3.0Ag-0.5Cu
Solder Temperature : 240 ± 3°C
Immersion Time : 3±1 s
Immersion and emersion rates : 25mm / s</td></tr>
<tr><td>3</td><td>Resistance to soldering heat</td><td>Meet Table 1.
Table 1
<table><tr><td>Appearance</td><td>No damaged</td></tr><tr><td>Cap. Change</td><td>Within ±7.5%</td></tr><tr><td>I.R.</td><td>Meet the initial rated value.</td></tr><tr><td>DC Resistance</td><td>0.05Ω max.</td></tr></table></td><td>Flux : Ethanol solution of rosin, 25(wt)%
Pre-heat : 150±10°C, 60 to 90s
Solder : Sn-3.0Ag-0.5Cu
Solder Temperature : 270 ± 5°C
Immersion Time : 10 ± 1 s
Immersion and emersion rates : 25mm / s
Initial values :
measured after heat treatment (150+0 / -10 °C,1hour) and exposure in the room condition for 48±4 hours.
Then measured after exposure in the room condition for 48±4 hours.</td></tr>
<tr><td>4</td><td>Bending Strength</td><td>Meet Table 2.
Table 2
<table><tr><td>Appearance</td><td>No damaged</td></tr><tr><td>Cap. Change</td><td>Within ±7.5%</td></tr><tr><td>DC Resistance</td><td>0.05Ω max.</td></tr></table></td><td>It shall be soldered on the glass-epoxy substrate (100×40×1.0mm).
Deflection : 2 mm
Keeping Time : 30 s

(in mm)</td></tr>
<tr><td>5</td><td>Drop</td><td>Products shall be no failure after tested.</td><td>It shall be dropped on concrete or steel board.
Height : 75 cm
Method : Free fall
Attitude from which the product is dropped : 3 directions
The Number of Time : 3 times for each direction
(Total 9 times)</td></tr>
<tr><td>6</td><td>Bonding Strength</td><td>The electrodes shall be no failure after tested.</td><td>It shall be soldered on the glass-epoxy substrate.
Applying Force (F) : 9.8 N
Applying Time : 30 s

(in mm)</td></tr>
<tr><td>7</td><td>Vibration</td><td>Meet Table 3.
Table 3
<table><tr><td>Appearance</td><td>No damaged</td></tr><tr><td>Capacitance</td><td>Meet the initial rated value.</td></tr><tr><td>DC Resistance</td><td>0.05Ω max.</td></tr></table></td><td>It shall be soldered on the glass-epoxy substrate.
Oscillation Frequency : 10 to 55 to 10Hz for 1 minute
Double Amplitude : 1.5 mm
Time : A period of 2 hours in each of 3 mutually perpendicular directions. (Total 6 hours)
Preconditioning : Heat treatment (150+0 / -10 °C,1hour)</td></tr>
</table>


■SPECIFICATIONS AND TEST METHODS

Environment Performance

It shall be soldered on the glass-epoxy substrate.

<table>
<tr><th>No</th><th>Item</th><th>Specification</th><th>Test Method</th></tr>
<tr><td>1</td><td>Temperature Cycling</td><td>Meet Table 1.</td><td>1 Cycle
1 step : Minimum Operating Temperature
+0 / -3 ° C / 30+3 / -0 min
2 step : Room Temperature / within 3 min
3 step : Maximum Operating Temperature
+3 / -0 °C / 30 +3 / -0 min
4 step : Room Temperature / within 3 min
Total of 10 cycles
Initial values : measured after heat treatment(150+0 / -10°C ,1hour) and exposure in the room condition for 48±4 hours.
Then measured after exposure in the room condition for 48± 4 hours.
If it’s doubt, the mesuring has to be done after 1 hours curing at 150+0 / -10°C and 48±4 hours storage.</td></tr>
<tr><td>2</td><td>Humidity</td><td>Meet Table 4.
Table 4<table><tr><td>Appearance</td><td>No damaged</td></tr><tr><td>Cap. Change</td><td>Within ±12.5%</td></tr><tr><td>I.R.</td><td>50Ω·F min.</td></tr><tr><td>DC Resistance</td><td>0.05Ω max.</td></tr></table></td><td>Temperature : 40±2°C
Humidity : 90 to 95%(RH)
Time : 500+24 / -0 hours
Initial values: measured after heat treatment (150+0 / -10 °C , 1hour) and exposure in the room condition for 48±4 hours.
Then measured after exposure in the room condition for 48±4 hours.
If it’s doubt, the mesuring has to be done after 1 hours curing at 150+0 / -10°C and 48±4 hours storage.</td></tr>
<tr><td>3</td><td>Heat Life</td><td></td><td>Temperature : Maximum Operating Temperature ± 2 °C
Test Voltage : Rated Voltage x 200%
Charge Current : 50 mA max.
Time : 1000+48 / -0 hours
Initial values: measured after heat treatment (150+0 / -10 °C , 1hour) and exposure in the room condition for 48±4 hours.
Only NFM21PC475B1A3, measured after voltage treatment(Maximum Operating Temperature±3°C, Rated Voltage ×200%, 1hour) and exposure in the room condition 48±4 hours.
Then measured after exposure in the room condition for 48±4 hours.
If it’s doubt, the mesuring has to be done after 1 hour curing at 150+0 / -10°C and 48±4 hours storage.</td></tr>
</table>

1. Appearance and Dimensions (8mm-wide paper tape)

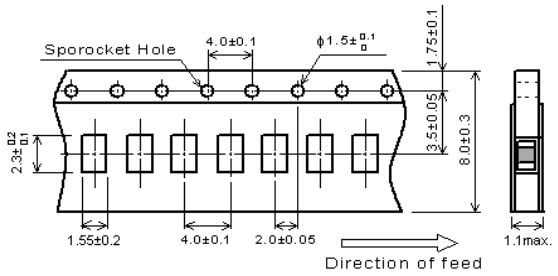


(in mm)


2. Specification of Taping
   (1) Packing quantity (standard quantity)
   4000 pcs. / reel
   (2) Packing Method
   Products shall be packaged in the cavity of the base tape and sealed by top tape and bottom tape.
   (3) Sprocket Hole
   The sprocket holes are to the right as the tape is pulled toward the user.
   (4) Base tape and Top tape
   The base tape and top tape have no spliced point.
   (5) Cavity
   There shall not be burr in the cavity.
   (6) Missing components number
   Missing components number within 0.1% of the number per reel or 1 pc., whichever is greater, and are not continuous.
   The specified quantity per reel is kept.

3. Pull Strength of Top Tape and Bottom Tape
   5N min.

4. Peeling off force of top tape
   0.1N to 0.6N (minimum value is typical)
   Speed of Peeling off : 300 mm / min

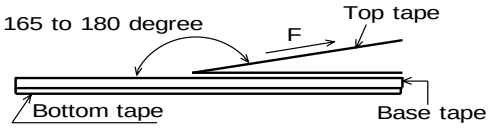

5. Dimensions of Leader-tape, Trailer and Reel
   There shall be leader-tape (top tape and empty tape) and trailer-tape (empty tape) as follows.

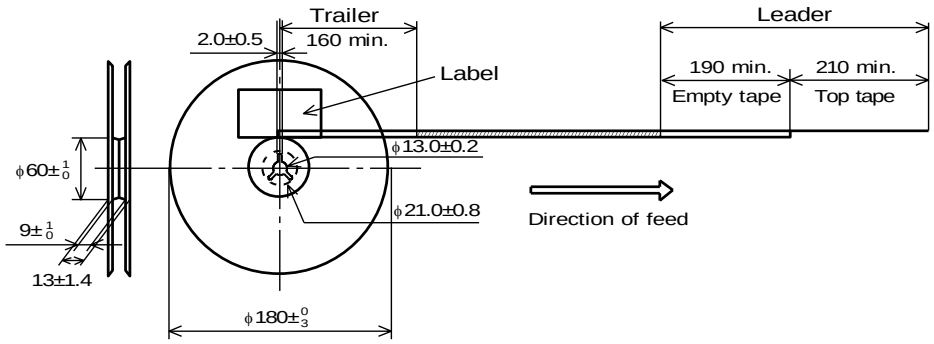

(in mm)

1. Mounting density
Add special attention to radiating heat of products when mounting this product near the products with heating.
The excessive heat by other products may cause deterioration of insulation resistance and excessive heat at this product, resulting in a fire.
2. Limitation of Applications
Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property.
(1)Aircraft equipment (2)Aerospace equipment (3)Undersea equipment (4)Power plant control equipment
(5)Medical equipment (6)Transportation equipment(automobiles, trains, ships, etc.) (7)Traffic signal equipment
(8)Disaster prevention / crime prevention equipment (9)Data-processing equipment
(10)Applications of similar complexity or with reliability requirements comparable to the applications listed in the above


Products can only be soldered with reflow.
This product is designed for solder mounting.
Please consult us in advance for applying other mounting method such as conductive adhesive.

1. Flux and Solder

Flux	Use rosin-based flux, Do not use highly acidic flux (with chlorine content exceeding 0.2(wt)%). Do not use water-soluble flux. Other flux (except above) Please contact us for details, then use.
Solder	Use Sn-3.0Ag-0.5Cu solder Use of Sn-Zn based solder will deteriorate performance of products. In case of using Sn-Zn based solder, please contact Murata in advance.


2. Note for Assembling
< Thermal Shock >
Pre-heating should be in such a way that the temperature difference between solder and products surface is limited to 100°C max. Also cooling into solvent after soldering should be in such a way that the temperature difference is limited to 100°C max.

3. Attention Regarding P.C.B. Bending
The following shall be considered when designing P.C.B.'s and laying out products.
(1) P.C.B. shall be designed so that products are not subject to the mechanical stress for board warpage.
[Products direction]

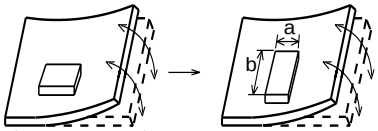

Products shall be located in the sideways direction (Length:a<b) to the mechanical stress.

(2) Products location on P.C.B. near seam for separation.




Products (A,B,C,D) shall be located carefully so that products are not subject to the mechanical stress due to warping the board. Because they may be subjected the mechanical stress in order of A>C>B≒D.

4. Pre-heating Temperature
Soldering shall be handled so that the difference between pre-heating temperature and solder temperature shall be limited to 100°C max. to avoid the heat stress for the products.


5. Reflow Soldering
1) Soldering paste printing for reflow
• Standard thickness of solder paste: 100µm to 150µm.
• Use the solder paste printing pattern of the right pattern.
• For the resist and copper foil pattern, use standard land dimensions.

• Standard printing pattern of solder paste.



(in mm)

2) Soldering Conditions
Standard soldering profile and the limit soldering profile is as follows.
The excessive limit soldering conditions may cause leaching of the electrode and / or resulting in the deterioration of product quality.

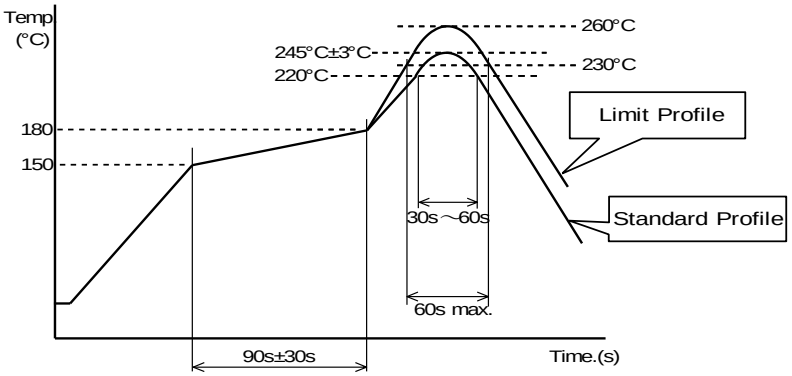

	Standard Profile	Limit Profile
Pre-heating	150°C ~ 180°C , 90s ± 30s	
Heating	above 220°C , 30s ~ 60s	above 230°C , 60s max.
Peak temperature	245°C ± 3°C	260°C , 10s
Cycle of reflow	2 times	2 times

6. Reworking with Soldering iron


The following conditions shall be strictly followed when using a soldering iron.

- Pre-heating : 150°C, 1 min
- Soldering iron output : 30W max.
- Tip temperature : 350°C max.
- Tip diameter : φ3mm max.
- Soldering time : 3(+1,-0) s
- Times : 2times max.

Note: Do not directly touch the products with the tip of the soldering iron in order to prevent the crack on the ceramic material due to the thermal shock.

7. Solder Volume

Solder shall be used not to be exceeded as shown below.

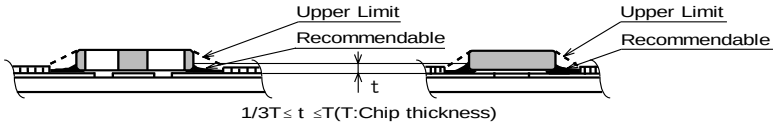

Accordingly increasing the solder volume, the mechanical stress to product is also increased.
Excessive solder volume may cause the failure of mechanical or electrical performance.

8. Cleaning Conditions

Products shall be cleaned on the following conditions.

(1) Cleaning temperature shall be limited to 60°C max. (40°C max. for Isopropyl alcohol (IPA))

(2) Ultrasonic cleaning shall comply with the following conditions, with avoiding the resonance phenomenon at the mounted products and P.C.B.

Power : 20W / l max.
Frequency : 28kHz to 40kHz
Time : 5 minutes max.

(3) Cleaner

1. Cleaner
   Isopropyl alcohol (IPA)
2. Aqueous agent
   PINE ALPHA ST-100S

(4) There shall be no residual flux and residual cleaner after cleaning.
In the case of using aqueous agent, products shall be dried completely after rinse with de-ionized water in order to remove the cleaner.

(5) Other cleaning
Please contact us.

9. Operating Environment

Do not use this product under the following environmental conditions, on deterioration of the performance, such as insulation resistance may result from the use.

(1) in the corrodible atmosphere (acidic gases, alkaline gases, chlorine, sulfur gases, organic gases and etc.)


(2) in the atmosphere where liquid such as organic solvent, may splash on the products.


10. Resin coating

The capacitance value may change and/or it may affect on the product's performance due to high cure-stress of resin to be used for coating / molding products. So please pay your careful attention when you select resin. In prior to use, please make the reliability evaluation with the product mounted in your application set.

11. Handling of a substrate

After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting to the substrate when cropping the substrate, inserting and removing a connector from the substrate or tightening screw to the substrate. Excessive mechanical stress may cause cracking in the product.

Bending 


Twisting 

12. Standard Land Dimensions

The chip EMI filter suppresses noise by conducting the high-frequency noise element to ground.
Therefore, to get enough noise reduction, feed through holes which is connected to ground-plane should be arranged according to the figure to reinforce the ground-pattern.

< Standard land dimensions for reflow >

・Side on which chips are mounted

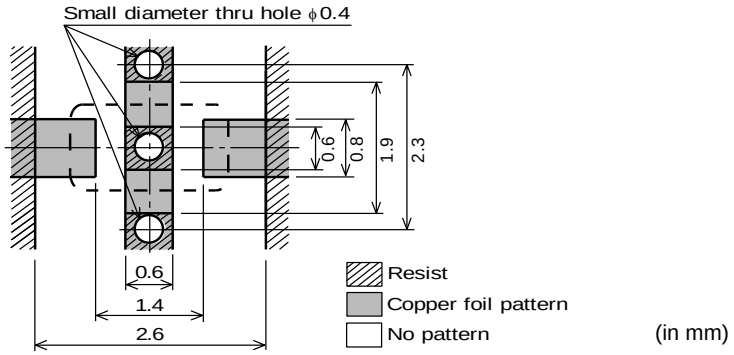

(in mm)

13. Storage condition

(1) Storage period

Use the products within 12 months after delivered.
Solderability should be checked if this period is exceeded.

(2) Storage environment condition

・Products should be stored in the warehouse on the following conditions.

Temperature: -10 to +40°C
Humidity: 15 to 85% relative humidity
No rapid change on temperature and humidity

・Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.
・Products should be stored on the palette for the prevention of the influence from humidity, dust and so on.
・Products should be stored in the warehouse without heat shock, vibration, direct sunlight and so on.
・Products should be stored under the airtight packaged condition.

(3) Delivery

Care should be taken when transporting or handling product to avoid excessive vibration or mechanical shock.

(1) Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.
(2) You are requested not to use our product deviating from the agreed specifications.
(3) We consider it not appropriate to include any terms and conditions with regard to the business transaction in the product specifications, drawings or other technical documents. Therefore, if your technical documents as above include such terms and conditions such as warranty clause, product liability clause, or intellectual property infringement liability clause, they will be deemed to be invalid.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Murata Manufacturing:

GCD21BR71H104KA01L LQG15WH72NH02D LQG15WHR11G02D LQH43CN1R0M03L
GRM155R61A223KA01D LQG15WZR13J02D LQH44PN4R7MPRL XRCGE26M000FXA2AR0
LQW15CNR56J1ZD GCM1885C2A181FA16D GCM21BR72A104KA37K GJM1555C1H1R3WB01D
GRJ31MR71E225KE11L GRM1555C1H1R0BA01D LQG15WH91NH02D GCM1555C1H6R8DA16D
GRJ32DR72E104KWJ1L GRM0335C1H1R6BA01D B1134AS-1R0N=P3 DLW21HN900HQ2L
GCM155C71A474KE36D NFE61HT332Z2A9L BLM15HB221SH1D GRM0335C1H9R0BA01D
GRM1555C1H180GA01D GRM21BR72A223KA01L LQG15WH1N9C02D GCM155R71E333KA55D
GRM1555C1H560GA01D LQH44PH6R8MPRL