2-1415012-1 ✔ ACTIVE

SCHRACK | SCHRACK SR2

TE Internal #: 2-1415012-1

Force-Guided Relay, Monostable, .7 W Coil, 17285 ohm Coil Resistance, 110 VDC Coil Voltage, 1A (NO) + 1B (NC), SCHRACK SR2, Power Relays

View on TE.com >

Relays & Contactors > Relays > Power Relays > Force Guided Relay with 2 contacts



Relay Type: **Force-Guided Relay**

Coil Magnetic System: **Monostable**

Coil Power Rating DC: **.7 W**

Coil Resistance: **17285 Ω**

Coil Voltage Rating: **110 VDC**

All Force Guided Relay with 2 contacts (33)

Features

Product Type Features

Relay Type	Force-Guided Relay

Configuration Features

Contact Special Features	Force Guided Contacts
Contact Arrangement	1A (NO) + 1B (NC)
Contact Number of Poles	2

Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	1500 Vrms
Contact Limiting Making Current	6 A
Contact Limiting Short-Time Current	6 A
Contact Limiting Continuous Current	6 A
Insulation Initial Dielectric Between Adjacent Contacts	3000 Vrms
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms
Contact Limiting Breaking Current	6 A
Coil Power Rating DC	.7 W
Coil Resistance	17285 Ω
Coil Voltage Rating	110 VDC
Contact Current Rating	6 A

Contact Switching Load (Min)	10mA @ 5V
Contact Switching Voltage (Max)	400 VAC
Contact Voltage Rating	250 VAC

Body Features

Product Weight	20 g[.706 oz]

Contact Features

Contact Material	AgNi

Termination Features

Relay Connection Type	PCB Termination
Terminal Configuration	Solder Pins

Mechanical Attachment

Product Mount Type	Printed Circuit Board

Dimensions

Insulation Clearance Between Contact & Coil	8 mm[.315 in]
Insulation Creepage Between Contact & Coil	8 mm[.315 in]
Product Width	12.6 mm[.496 in]
Product Length	29 mm[1.14 in]
Product Height	25.5 mm[1 in]

Usage Conditions

Environmental Category of Protection	RTIII
Environmental Ambient Temperature (Max)	70 °C[158 °F]

Operation/Application

Current Type	DC
Coil Magnetic System	Monostable

Product Availability

Product Availability	Worldwide

Packaging Features

Packaging Method	Box & Tube, Tube

Other

Length Class (Mechanical)	25 – 30 mm
Environmental Ambient Temperature Class	-25 – 70 °C

Height Class (Mechanical)	25 – 30 mm
Coil Power Rating Class	.6 – .8 W
Width Class (Mechanical)	12 – 16 mm
Contact Current Class	5 – 10 A

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Methanone, (diphenylphosphinyl)(2,4,6-trimethylphenyl)- (2% in Component Part) **Article Safe Usage Statements:** Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 260°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 8-1415543-0
V23047-P1110-A501

Also in the Series | SCHRACK SR2

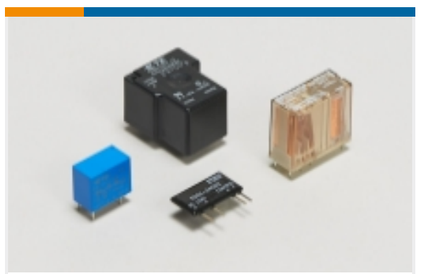

Power Relays(33)


Customers Also Bought



TE Part #1393260-4
Force Guided Relay with 6 contacts



TE Part #1-1393258-5
Force Guided Relay with 2 contacts

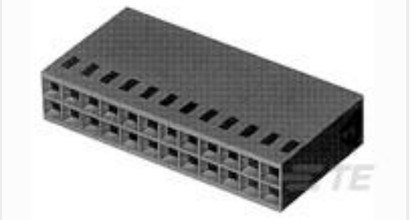

TE Part #87456-7
12 MODIV HSG COMP DR .100CL



TE Part #5-1614882-0
CPF 0603 15K 0.1% 25PPM 5K RL



TE Part #1393240-6
RT314615



TE Part #1-1393127-6
PRD-11AH0-120=PRD



TE Part #1-640383-1
11P MTA156 HDR ASSY STR SQ SN

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1415012-1_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-1415012-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1415012-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

SR2M

English

Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

VDE Certificate

English

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

ROX05SJ18R 1-794222-0 1903112-2 2834055-1 3430B2F51RTDF 650075-000 CPF0402B37K4E1
TE50BR39J 141991-2 2005330-1 2310537-1 2380312-2 SBCHE154R7K SMW73R0JT 3-1393225-0
RH73H2A40MKTN 1743455-2 175977-2 1969656-1 SBCHE64R7K 1-962915-1 CRGCQ2010J3K3
MPT100C18RF 1393431-1 936348-1 U5254-000005-030PA 2-292161-3 2377783-2 3631B101LL 917696-1