



PART NO.	RFN-1022-SR2			
REV	DESCRIPTION	DWN	DATE	APPROVED
E	UPDATED BOM	CZS	04/04/17	JDMc




RECOMMENDED MOUNTING HOLE

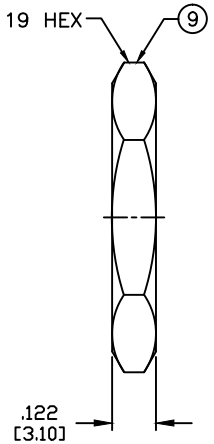


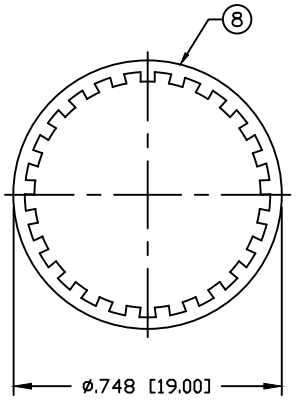


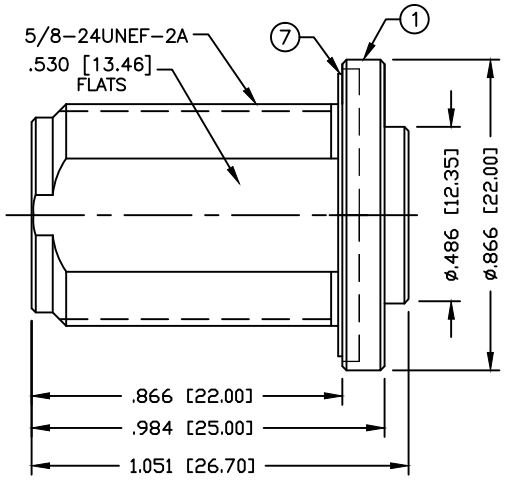




RECOMMENDED CRIMP DIE: .100





RECOMMENDED STRIPPING DIM'S



SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 0–11 GHz
VSWR: 1.3 Max.
INSERTION LOSS: .06 dB Max. X $\sqrt{fGHz}$
WORKING VOLTAGE: 1k V rms @ sea level
TEMPERATURE RANGE: –65°C TO 165°C
INSULATION RESISTANCE: 5k M Ohms min.
FOR .141 SEMI RIGID, RG–402/U & BELDEN 1673A CABLE

#	DESCRIPTION	QTY	MATERIAL	FINISH
9	HEX NUT	1	BRASS	NICKEL, 100µ"
8	WASHER	1	BRASS	NICKEL, 100µ"
7	GASKET	1	SILICONE	---
6	SOLDER NUT	1	BRASS	GOLD, 3µ"
5	INSULATOR	1	PTFE	---
4	CONTACT	1	BRASS	GOLD, 3µ"
3	INNER BODY	1	BRASS	NICKEL, 100µ"
2	INSULATOR	1	PTFE	---
1	OUTER BODY	1	BRASS	NICKEL, 100µ"

CUSTOMER OUTLINE DRAWING

ALL DIMENSIONS ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

DRAWN	C. ZUNIGA	04/04/17
CHECKED		
ORJ DRAWN	K. MAXWELL	10/03/95

RoHS COMPLIANT

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

RF connectors
DIVISION OF RF INDUSTRIES, LTD.
7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549–6340
(858) 549–6345 FAX

N JACK, BULKHEAD

DOUBLE D FLAT & GASKET

SIZE	CABLE GROUP	DWG NO.	REV
A	SR2	RFN-1022-SR2	E

SCALE:	ENGINEERING ID:	SHEET 1 OF 1
NTS	008974	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

RF Industries:

RFT-1239 RQA-5000-SR2LP RFN-1007-2SX RFU-633 RSA-3252-C RSA-3478 COMP-TM-400PL RFB-1137 RFU-500 RFU-505 RFU-632 RQN-1300-SR2 RFU-601-1X RSA-3402 RFU-601-3 RFW-12404-30-5 RFW-5573-60 RFW-5573-7 RQA-5010-SR2LP RFB-1124-1X RFD-1601-HPL RFD-1610DS-H4 RFU-507-SI RFU-600-6C1 RFU-602-2 RFW-5573-16 RF123-7002-B RF123-7052-1B RFD-225M-SR2 RFU-600-5