FRN-C2-L301
Rotary Damper

Bansbach easylift®



SPECIFICATIONS


Model	Rated Torque	Damping Direction	Max Rotation Speed
FRN-C2-L301	(30±8.0)X10^{-3}Nm (300±80gfcm)	Counter-clockwise	50 RPM


Max Cycle Rate	Operating Temperature	Weight	Body & Cap Material	Rotating Shaft Material	Oil Type
10 cycles/min.	0 ~ 50˚C	3.2g	Polycarbonate	Polyacetal	Silicone Oil

Note 1) Rated torque measured at a rotation speed of 20rpm at 23°C
Note 2) Torque can be customized by changing the oil viscosity

- There are dampers that generate torque in both directions and one-way torque in the clockwise direction or counter clockwise direction when the rotating axle is viewed from the top

DAMPING CHARACTERISTICS

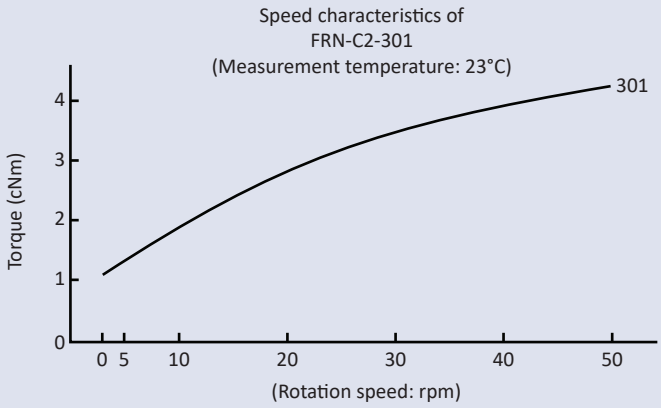

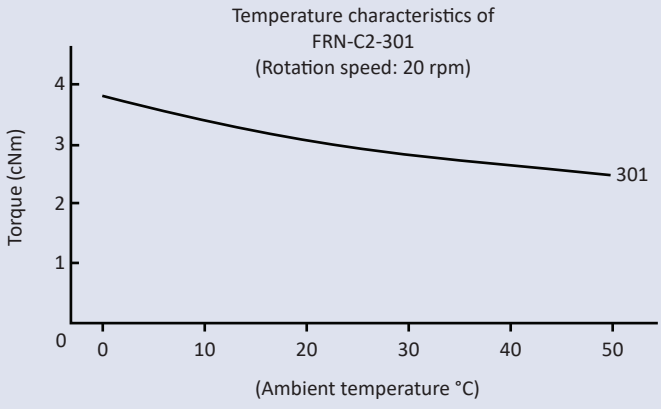

- **Speed characteristics:** A rotary damper's torque varies according to the rotation speed. In general, as shown in the graph to the left, the torque increases as the rotation speed increases, and the torque decreases as the rotation speed decreases. In addition, please note that the starting torque slightly differs from the rated torque.

- **Temperature characteristics:** A rotary damper's torque varies according to the ambient temperature. In addition, as shown in the graph to the left, the torque decreases as the ambient temperature increases, and the torque increases as the ambient temperature decreases. This is because the viscosity of the silicone oil inside the damper varies according to the temperature. When the temperature returns to normal, the torque will return to normal as well.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

BANSBACH EASYLIFT:

B0N0N40-200-462-065N H0N0F42-300-647-1110N H0N0F42-400-847-110N D0M0ZF3-305-400-355N
A0A0N40-210-473-580N D0M0N45-203-480-1555N FFD-25SS-R103 H0N0F42-100-264-535N
V0V0N56-100-230-135N B0N0N40-210-473-270N K0N0BK2-305-685-1110N V0V0F46-090-207-090N
D3D3XB1-100-310/000N H0N0F42-150-347-270N D0M0ZF3-305-400-270N K0N0BK2-100-280-355N
V0V0N56-100-230-225N W4W4-96-075-255--001/000N D0M0ZF3-100-195-180N D0M0ZF3-305-400-180N
K0N0BK2-510-1095-180N K0N0KK2-150-460-890N A0A0N40-140-349-270N B0N0F40-200-455-225N
B0N0F40-210-473-445N D0M0F55-150-362-890N D0M0ZF3-100-195-355N FK-1210H-S
H0N0N42-410-862-445N K0N0KK2-200-589-1110N