
ODB22599-24HB10A

DC Motorized Impeller 24V

225x99mm (8.85”x3.90”)



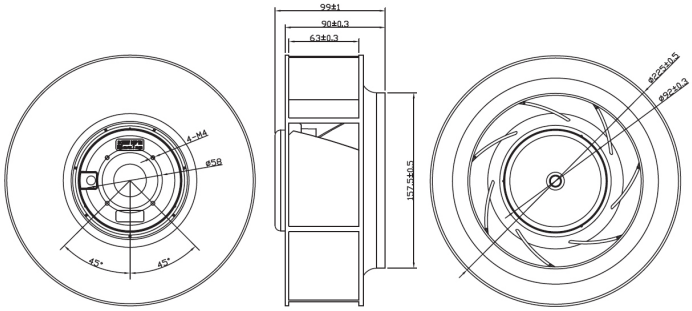

Outlet – Function Leads


a. Red --- DC Voltage +
b. Black --- DC Voltage – (GND)
c. Blue --- PWM Control
d. White --- F/G Tachometer

Frame & Impeller	Frame - Aluminum Impeller - UL94V-0 Thermoplastic
Connecion	4 Lead wires *
Motor	DC brushless, IC protected
Bearing System	Dual ball bearing
Insulation Resistance	Min. 10M at 500VDC
Dielectric Strength	1 minute at 500 VAC, max leakage < 500 MicroAmp
Temperature Range	-10C ~ +65C
Storage Temperature	-40C ~ +80C
Life (L10)	-40,000 hours (40C)

Features:
Signal Output: Tachometer
Speed Control: PWM


Weight: ~ 1500g (3.31 lbs)

m0

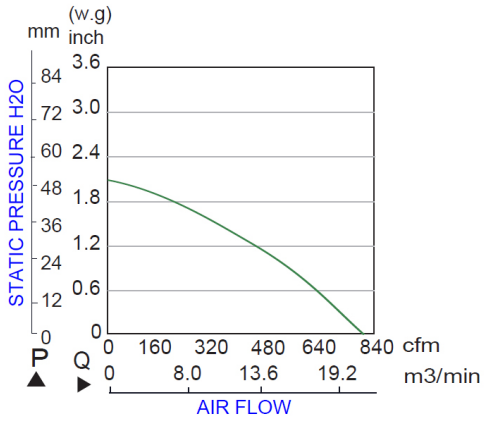

Part Number	ODB22599-24HB10A
Nominal Voltage	24VDC
Voltage Range	16 ~ 28 VDC
Nominal Current	4.6 A
Rated Power	110.4 W
Rated Speed (RPM)	2500
Airflow (CFM)	835
Noise Level (dB)	55
Max. Static Pressure	2.05” H_2O

(External signal function design is decided by customer)

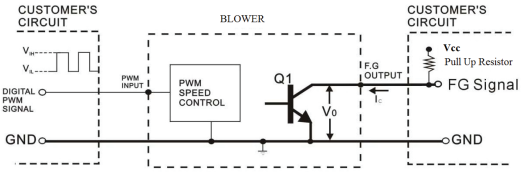

* FG 2 pulses per revolution

*TRANSISTOR Q1 AT "ON" POSITION
COLLECTOR CURRENT---------- I_C =10mA MAX
SATURATION VOLTAGE---------- V_{CE}=1 V MAX
*TRANSISTOR Q1 AT "OFF" POSITION
RELEASE VOLTAGE---------- V_{OH}= Vcc Max
*DIGITAL PWM SPEED CONTROL POSITION
PWM INPUT VOLTAGE HIGH---------- V_{IH} >2.6V
PWM INPUT VOLTAGE LOW---------- V_{IL} <0.5V

*PWM INPUT FREQUENCY---------- FPWM: 100Hz~100KHz

Blower will run full speed at 100%, stop at 0%, full speed if PWM not connected

Knight Electronics, Inc.
10557 Metric Drive
Dallas, Texas 75243
214-340-0265

Orion Fans


Information and data is subject to change without prior notification.

ODB22599-48HB10A

DC Motorized Impeller 48V

225x99mm (8.85”x3.90”)



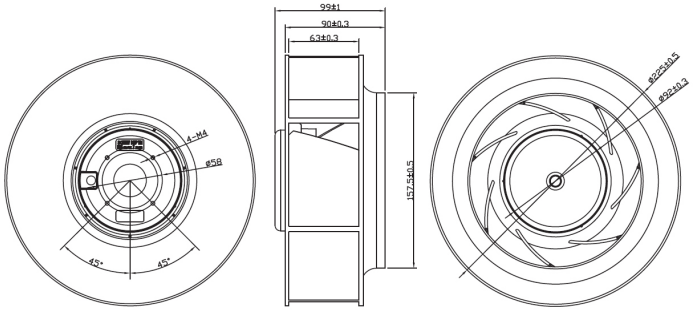

Outlet – Function Leads


a. Red --- DC Voltage +
b. Black --- DC Voltage – (GND)
c. Blue --- PWM Control
d. White --- F/G Tachometer

Frame & Impeller	Frame - Aluminum Impeller - UL94V-0 Thermoplastic
Connecion	4 Lead wires *
Motor	DC brushless, IC protected
Bearing System	Dual ball bearing
Insulation Resistance	Min. 10M at 500VDC
Dielectric Strength	1 minute at 500 VAC, max leakage < 500 MicroAmp
Temperature Range	-10C ~ +65C
Storage Temperature	-40C ~ +80C
Life (L10)	-40,000 hours (40C)

Features:
Signal Output: Tachometer
Speed Control: PWM


Weight: ~ 1500g (3.31 lbs)

m0

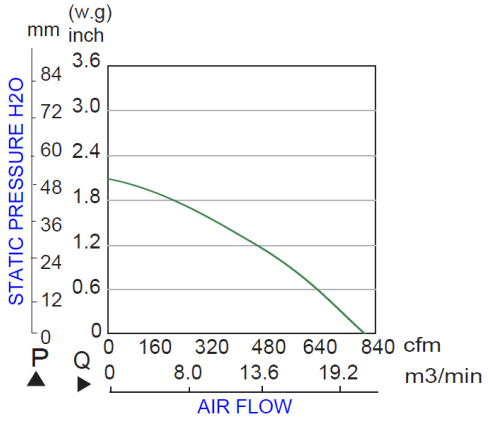

Part Number	ODB22599-48HB10A
Nominal Voltage	48VDC
Voltage Range	46 ~ 56 VDC
Nominal Current	2.3 A
Rated Power	110.4 W
Rated Speed (RPM)	2500
Airflow (CFM)	835
Noise Level (dB)	55
Max. Static Pressure	2.05” H_2O

(External signal function design is decided by customer)

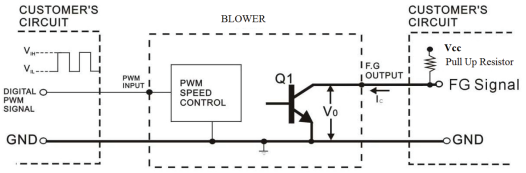

* FG 2 pulses per revolution

*TRANSISTOR Q1 AT "ON" POSITION
COLLECTOR CURRENT---------- I_C =10mA MAX
SATURATION VOLTAGE---------- V_{CE}=1 V MAX
*TRANSISTOR Q1 AT "OFF" POSITION
RELEASE VOLTAGE---------- V_{OH}= Vcc Max
*DIGITAL PWM SPEED CONTROL POSITION
PWM INPUT VOLTAGE HIGH---------- V_{IH} >2.6V
PWM INPUT VOLTAGE LOW---------- V_{IL} <0.5V

*PWM INPUT FREQUENCY---------- FPWM: 100Hz~100KHz

Blower will run full speed at 100%, stop at 0%, full speed if PWM not connected

Knight Electronics, Inc.
10557 Metric Drive
Dallas, Texas 75243
214-340-0265

RoHS

TÜV

Orion Fans

Information and data is subject to change without prior notification.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Orion Fans:

OD6038-12HB-VXC OD8038-12HHBVXE OD1232-24HB OAT600 ODB13391-24HB10A ODT601 OA92AP-11-1TB OD1232-SPOT/DIN OD4020-12HB C45-12 OD8025-05HB OD8025-12MB GRM60-30 OA109AP-11-3TB OA172SAP-11-1TB OA225AP-22-1WB1868 OA92AP-22-3WB OD172SAPL-24HTB OD6025-12LB IMP-250-34 OA125EC-UR-1WB OD1238-12MBIP68 OD6025-12HB01A OA125AP-11/22-1WB OD1225-12HB02A OD4010-12HB02A OD4010-12LB G50-3 OD1238-24HBIP55 OD180APL-12HBIP69K