KNSCHA

Empowering The World

广东科尼盛电子科技有限公司

KNSCHA ELECTRONICS CO.,LIMITED

IATF16949:2016 ISO9001:2015 ISO14001:2015

部品规格书

APPROVE SHEET

客 户 名 称 Customer Name	
产 品 名 称 Product Name	贴片型铝电解电容器 SMD Aluminum Electrolytic Capacitors
客 户 料 号 Customer P/N	
科 尼 盛 料 号 KNSCHA P/N	225RV0018
型 号 规 格 Product Type	100uF ±20% 35V 105˚C@2000Hours SMD,D6.3xL7.7mm KNS RVE Series 高频低阻
日期 Date	2025年03月14日

制 造 Manufacture	
核 准 APPROVAL	制 作 PREPARED
王涛	刘丽芬

客 户 承 认 栏 CUSTOMER APPROVED		
核 准 APPROVED	确 认 CHECKED	经 办 DESIGNED

网址：www.knscha.com 邮箱：sales@knscha.com

电话：0769-81035570 83698067 传真：0769-83861559

营业中心：东莞市寮步镇香市科技产业园松湖智谷研发中心A3栋8层
8th floor,Building A3,Songshan Lake Intelligent Valley,Dongguan, Guangdong,China

总部基地：广东省东莞市东坑镇农横路7号汇金展拓科技园
Building 3, No.7 Nongheng Road, Dongkeng Town, Dongguan, Guangdong Province, China

杭州分公司：浙江省杭州市余杭区临平余之城1栋20楼

厦门办事处：福建省厦门市集美区厦门软件园三期F12栋901-8室

KNSCHA

Empowering The World

KNSCHA ELECTRONICS CO.,LIMITED

IATF16949:2016 ISO9001:2015 ISO14001:2015

Aluminum Electrolytic Capacitors

- Source Manufacturer
- 25+ Years Experience
- 7X24 Hours Online Service



Film Capacitors

- Source Manufacturer
- 10+ Years Experience



cULus EAC VDE CQC KC TÜV

KNSCHA

Empowering The World

















+86(769)83698067
+86(769)83861559
www.knscha.cn
cathy@knscha.com
8th floor,Building A3,Songshan Lake Intelligent Valley,Dongguan,Guangdong,China
Building 3, No.7 Nongheng Road, Dongkeng Town, Dongguan, Guangdong Province, China

KNSCHA ELECTRONICS CO.,LIMITED

IATF16949:2016 ISO9001:2015 ISO14001:2015

KNSCHA

Empowering The World

广东科尼盛电子科技有限公司

KNSCHA ELECTRONICS CO.,LIMITED

IATF16949:2016 ISO9001:2015 ISO14001:2015

PRODUCT CHARACTERISTICS

型号 P/N	额定工作电压 Rated Voltage (V)	静电容量容值 Capacitance (±20%) (μF)	使用温度范围 Category temp. range (℃)	规格尺寸 Case size (mm)	等效串联电阻 ESR(100kHz/+20℃) (mΩ)	允许最大纹波电流 Ripple current (100kHz/+105℃) (mA/rms)	损耗角的正切 (120Hz/+20℃) (tanδ)	漏电流 L C (μA)	耐久性 Endurance (Hours)
225RV0018	35	100	-40~+105	D6.3xL7.7	600	230	0.14	≤35	2000

RVE 105℃,Low Impedance. Series

特性/ Features

105℃, 2000~3000 hours assured, Low Impedance.
Available for high density surface mounting.
High stability and reliability.



≤Φ6.3mm




≥Φ8mm

■表1 规格表 Specifications

Item	Condition		Specifications							
Category Temperature Range(℃)	※		-40℃ ~ +105℃							
Capacitance Tolerance (%)	120Hz, 20℃		±20%							
Rated Voltage (v)	※		6.3	10	16	25	35	50	63	100
Dissipation Factor (tanδ)	120Hz, 20℃ (Max.)	tanδ	0.26	0.20	0.16	0.14	0.12	0.12	0.12	0.08
		Notes	Exceeding 1,000uF, +0.02 every 1,000uF							
Leakage Current (LC)	After 2 minutes, 20℃ (uA, Max.)		0.01CV or 3uA, whichever is greater.							
Low Temperature Characteristics	Impedance Ratio (Max.)	$Z_{-25℃}/Z_{+20℃}$	4	3	2	2	2	2	2	2
		$Z_{-55℃}/Z_{+20℃}$	8	5	4	3	3	3	3	3
Endurance	105℃, Rated Voltage Applied (With the rated ripple current)	Hours	3,000 (2,000hrs. for Ø4~Ø6.3)							
		△C/C	Within ±30% of initial value							
		tanδ	300% or less of the initial specified value							
		LC	The initial specified value or less							
Shelf life	105℃	Hours	1,000							
		Other Items	same as those for the endurance.							

■表2 外形尺寸 Dimensions(mm)

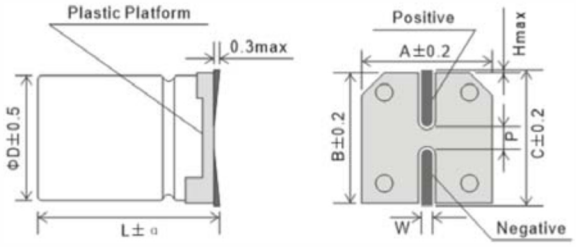

D	L	A	B	C	P	α	W
4	5.7	4.3	4.3	5.0	1.0	±0.3	0.5-0.8
5	5.7	5.3	5.3	6.0	1.5	±0.3	0.5-0.8
6.3	5.7	6.6	6.6	7.3	2.0	±0.3	0.5-0.8
6.3	7.7	6.6	6.6	7.3	2.0	±0.3	0.5-0.8
8	10.5	8.3	8.3	9.0	3.1	±0.5	0.7-1.2
10	10.5	10.3	10.3	11.0	4.7	±0.5	0.7-1.2

■表3 纹波电流与频率补正系数 Ripple Current and Frequency Multipliers

Frequency (Hz) / Capacitance (uF)	50	120	1k	10k	100K
Under 100	0.35	0.50	0.70	0.90	1.00
100 ~ 2200uF	0.40	0.65	0.85	0.95	1.00

■表4 标准品一览表 Standard Size

WV / uF	6.3v(0J)			10v(1A)			16v(1C)			25v(1E)			35v(1V)			50v(1H)		
	ΦDxL	Imp.	R.C.	ΦDxL	Imp.	R.C.	ΦDxL	Imp.	R.C.	ΦDxL	Imp.	R.C.	ΦDxL	Imp.	R.C.	ΦDxL	Imp.	R.C.
1																4x5.7	5.0	30
1.5																4x5.7	5.0	30
2.2																4x5.7	5.0	30
3.3													4x5.7	3.0	60	4x5.7 5x5.7	5.0 3.0	30 50
4.7													4x5.7	3.0	60	4x5.7 5x5.7	5.0 3.0	30 50
10										4x5.7	3.0	60	4x5.7 5x5.7	3.0 1.8	60 95	5x5.7 6.3x5.7	3.0 2.0	50 70
15							4x5.7	3.0	60	4x5.7	3.0	60	5x5.7	1.8	95	6.3x5.7	2.0	70
22				4x5.7	3.0	60	4x5.7 5x5.7	3.0 1.8	60 95	4x5.7 5x5.7	3.0 1.8	60 95	5x5.7	1.8	95	6.3x5.7	2.0	70
33				4x5.7	3.0	60	4x5.7 5x5.7	3.0 1.8	60 95	4x5.7 5x5.7	3.0 1.8	60 95	5x5.7 6.3x5.7	1.8 1.0	95 140	6.3x5.7 6.3x7.7	2.0 1.0	70 120
47	4x5.7	3.0	60	4x5.7 5x5.7	3.0 1.8	60 95	5x5.7 6.3x5.7	1.8 1.0	95 140	5x5.7 6.3x5.7	1.8 1.0	95 140	6.3x5.7	1.0	140	6.3x7.7	1.0	120
56	5x5.7	1.8	95	4x5.7 5x5.7	3.0 1.8	60 95	5x5.7 6.3x5.7	1.8 1.0	95 140	6.3x5.7	1.0	140	6.3x5.7	1.0	140	6.3x7.7	1.0	120
68	5x5.7	1.8	95	5x5.7	1.8	95	5x5.7 6.3x5.7	1.8 1.0	95 140	6.3x5.7	1.0	140	6.3x5.7 6.3x7.7	1.0 0.6	140 230	6.3x7.7 8x10.5	1.0 0.6	120 300
100	5x5.7	1.8	95	5x5.7 6.3x5.7	1.8 1.0	95 140	6.3x5.7 6.3x7.7	1.0 0.6	140 230	6.3x5.7 6.3x7.7	1.0 0.6	140 230	6.3x7.7	0.6	230	8x10.5 10x10.5	0.6 0.3	300 500
150	5x5.7 6.3x5.7	1.8 1.0	95 140	6.3x5.7	1.0	140	6.3x5.7 6.3x7.7	1.0 0.6	140 230	6.3x7.7 8x10.5	0.6 0.3	230 450	6.3x7.7 8x10.5	0.6 0.3	230 450	10x10.5	0.3	500
220	6.3x5.7	1.0	140	6.3x5.7 6.3x7.7	1.0 0.6	140 230	6.3x7.7	0.6	230	8x10.5	0.3	450	8x10.5 10x10.5	0.3 0.15	450 670	10x10.5 10x12.5	0.3 0.16	500 580
330	6.3x5.7 6.3x7.7	1.0 0.6	140 230	6.3x7.7	0.6	230	6.3x7.7 8x10.5	0.6 0.3	230 450	8x10.5 10x10.5	0.3 0.15	450 670	10x10.5	0.15	670			
470	6.3x7.7	0.6	230	6.3x7.7 8x10.5	0.6 0.3	230 450	8x10.5	0.3	450	10x10.5 10x12.5	0.15 0.08	670 800	10x10.5 10x12.5	0.15 0.08	670 800			
680	8x10.5	0.3	450	8x10.5	0.3	450	8x10.5 10x10.5	0.3 0.15	450 670									
1000	8x10.5	0.3	450	8x10.5 10x10.5	0.3 0.15	450 670	10x10.5	0.15	670									
1500	8x10.5 10x10.5	0.3 0.15	450 670															

Note1: Case size ΦD x L(mm), ripple current (mA, rms) at 105℃, 100KHz.
Note2: Produce custom product too, which are not found in these tables.

WV / uF	63v(1J)			80v(1K)			100v(2A)		
	ΦDxL	Imp.	R.C.	ΦDxL	Imp.	R.C.	ΦDxL	Imp.	R.C.
4.7	5x5.7	3.0	50						
10	5x5.7 6.3x5.7	3.0 1.5	50 80	6.3x5.7 6.3x7.7	3.0 2.4	40 60	6.3x7.7	2.4	60
22	6.3x5.7 6.3x7.7	1.5 1.2	80 120	6.3x7.7 8x10.5	2.4 1.5	60 110	8x10.5	1.5	110
33	6.3x7.7 8x10.5	1.2 0.7	120 250	8x10.5	1.5	110	8x10.5 10x10.5	1.5 0.8	110 170
47	8x10.5	0.65	250	8x10.5	1.5	110	10x10.5	0.8	170
56	8x10.5	0.65	250	8x10.5	1.5	110	10x10.5	0.8	170
68	8x10.5	0.65	250	10x10.5	0.8	170	10x10.5	0.8	170
82	8x10.5 10x10.5	0.65 0.35	250 400	10x10.5	0.8	170			
100	10x10.5	0.35	400	10x10.5	0.8	170			
150	10x10.5	0.35	400						

Note1: Case size ΦD x L(mm), ripple current (mA, rms) at 105℃, 100KHz.
Note2: Produce custom product too, which are not found in these tables.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

KNSCHA:

225RV0041 FZ100UF35V90RV0145 MEB105J63V82CB0235 RVT22UF50V67RV0028 178MU0009 189RV0063 MPX472K31C2KN15600 RVT100UF35V34RV0158 RVE100UF35V67RV0072 225RV0029 225RV0065 RVT100UF50V67RV0040 189RV0036 XT47UF35V90RV0081 01EC4294SHC1000UF25V 126RV0004 225RV0031 FZ220UF50V90RV0126 SHG330UF50V01EC2021 XT220UF50V90RV0078 XT100UF10V90RV0060 126RV0008 225RV0026 225RV0058 MMK103J3AC3KN156G2 MPX155K31D7KN15800 RVT4.7UF100V67RV0118 MPP104J2J15AJ22600 RVT100UF16V67RV0016 VT10UF16V167RV0128