

由 Autodesk 教育版产品制作

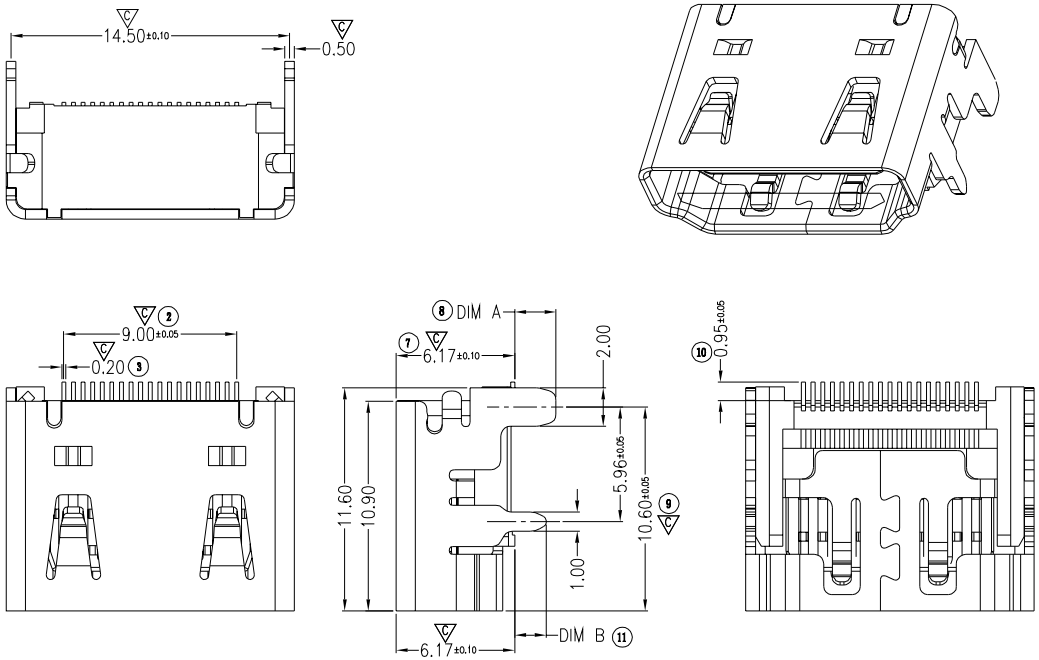

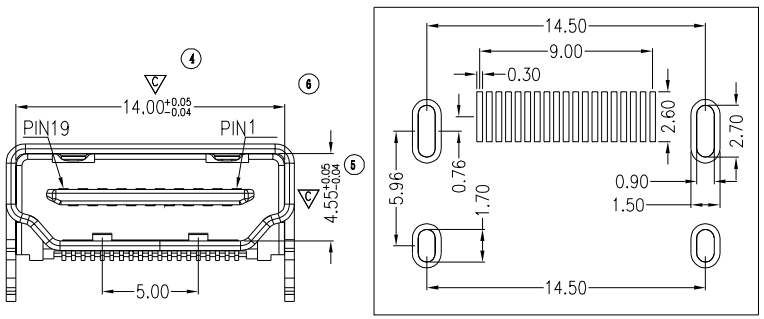

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/−0.05)

NOTES:
1.MATERIAL:
HOUSING:LCP,BK,UL94V−0
SHELL: T=0.50mm
TERMINAL: BRASS, T=0.20mm
2. CONTACT PLATING:
NICKEL UNDERPLATING OVER ALL
GOLD PLATING AT CONTACT AREA
TIN AT SOLDERING AREA
3. SHELL PLATING: NICKEL 50u" MIN
4. PACKAGING SPECIFICATION:RELL
5. TERMINAL SOLDER−TAIL COPLANARITY 0.10MM MAX
6. CONTROL DIMENSIONS INDICATED FROM "▼"
7.ELECTRICAL:
INSULATION RESISTANCE: 100M ohm MIN.
CONTACT RESISTANCE: 30m ohm MAX.
DIELECTRIC WITHSTANDING: 500 VAC FOR 1 MINUTE
CURRENT RATING: 0.5A.
VOLTAGE RATING: 40V AC
8. MECHANICAL
INSERTION FORCE:4.5Kgf MAX
WITHDRAWAL FORCE:1.0~4.0Kgf

深圳市万骏达电子有限公司 http://www.wanjunda.com		图号(DWG NO)	单位(UNIT): MM
		本(REV)	比例(SCALE)1:1
		日期(DATE)	
品名(ITEM NO)	HDMI A TYPE MODEL 无LOGO	设计(DESIGN)	未注公差 TOLERANCE UNSPECIFIED
料号(PART NO)	HDMI-AF-WT-02	审核(CHECKED)	X.X ±0.30 X.XX ±0.15 X.XXX ±0.10 X° ±5° X.X° ±2°
模号(MODEL NO)		核准(APPROVED)	

由 Autodesk 教育版产品制作

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Wanjunda:

TF-PUSH-1.8H-01 WF-ZH1.5-3P-WT WF-ZH1.5-5P-LT TPC-16P-CB-1.6(3MD) WF-MX1.25-5P-WT DSUB-DR-9M-CS WF-ZH1.5-4P-LT DSUB-DR-9F-CS SW-SMT-4-4-1.5 WF-1.25J-3P-WT WF-1.25J-5P-WT WF-ZH1.5-2P-LT RF-IPEX-SMT-01 TPC-24P-WT-01 WF-ZH1.5-3P-LT WF-ZH1.5-6P-LT DP-AF-CC-01 DSUB-HDR-15F-3.08 DVI-24+5-CS TPC-16P-CB-0.8(3MD) WF-HY2.0-10P-WT WF-MX1.25-5P-LT NANO-PULL-6P-1.35 TPC-24P-WT-02 WF-MX1.25-2P-LT WF-PH2.0-2P-WT WF-ZH1.5-4P-WT WF-ZH1.5-6P-WT WF-XH2.5-2P-WT WF-ZH1.5-5P-WT