# HC-STA-B24-SHWD-2SSM40-ELC-AL - Housing

1082605

https://www.phoenixcontact.com/us/products/1082605

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Box mounting bases B24, with double locking latch, material: Die-cast aluminum, salt water resistant, cable outlets: 2, lateral, 2x M40, height: 84.7 mm, cable gland: none, Standard

## Your advantages

- Good shielding in the event of electromagnetic interference

## Commercial data

| | |
|---|---|
| Item number | 1082605 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | BF56 |
| Product key | BF7APB |
| Catalog page | Page 637 (C-2-2019) |
| GTIN | 4055626816418 |
| Weight per piece (including packing) | 397 g |
| Weight per piece (excluding packing) | 22.22 g |
| Customs tariff number | 85389099 |
| Country of origin | CN |

## Technical data

### Notes

| | |
|---|---|
| General | for contact inserts HC-B24, BB46, D64, DD108, HV10/16, M |


### Product properties

| | |
|---|---|
| Product type | Housing with locking latch |
| Housing type | Box mounting bases |
| Application | Standard |
| Type | B24 |
| No. of cable outlets | 2 |
| Type of the screw connection | 2x M40 |
| Type | Tall design |
| Cable outlet | lateral |
| Pg screw connection | none |

Data management status

| | |
|---|---|
| Article revision | 02 |

### Dimensions

| | |
|---|---|
| Dimensional drawing |   |
| Width | 57 mm |
| Height | 84.7 mm |
| Length | 144 mm |
| Hole diameter | 5.5 mm |

### Material specifications

| | |
|---|---|
| Flammability rating according to UL 94 | V0 (Interlock) |
| Seal material | NBR, conductive |
| Housing material | Die-cast aluminum, salt water resistant |
| Housing surface material | uncoated |
| Locking latch material | PA |

### Mechanical properties

Mechanical data

| | |
|---|---|
| Type of the screw connection | 2x M40 |
| Locking type | Latch |

### Connection data

| | |
|---|---|
| Tightening torque | 2 Nm ... 3 Nm (for M5 mounting screws on the surface-mount |

| | |
|---|---|
| | housing) |

## Mounting

| | |
|---|---|
| Thread type | () |
| Assembly note | One opening is sealed with a plastic filler plug and can be opened using a screwdriver. |


## Environmental and real-life conditions

### Ambient conditions

| | |
|---|---|
| Degree of protection | IP66 |
| | IP67 |
| Enclosure rating (NEMA) | 4 (UL 50e) |
| | 4X (UL 50e) |
| | 12 (UL 50e) |
| Impact strength | IK09 |
| Ambient temperature (operation) | -40 °C ... 125 °C |

## Drawings

Dimensional drawing

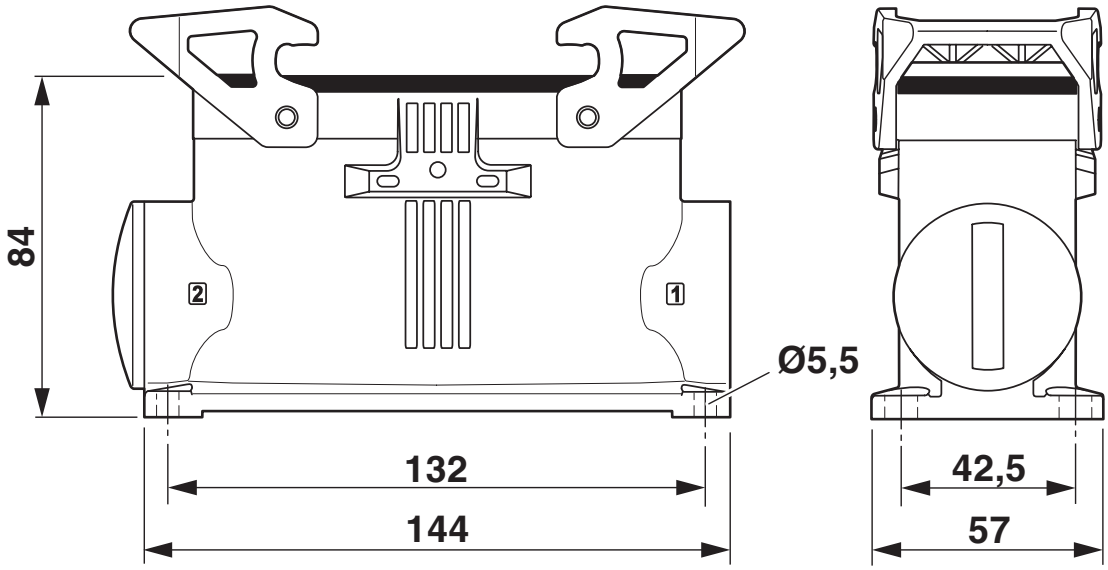


Dimensional drawing

## Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1082605

**DNV**
Approval ID: TAE000037S

**cUL Recognized**
Approval ID: E255026

**UL Recognized**
Approval ID: E255026

**EAC**
Approval ID: RU C-DE.BL08.B.00511

**cULus Recognized**

## Classifications

### ECLASS

| | |
|---|---|
| ECLASS-11.0 | 27440202 |
| ECLASS-12.0 | 27440202 |
| ECLASS-13.0 | 27440202 |

### ETIM

| | |
|---|---|
| ETIM 9.0 | EC000437 |

### UNSPSC

| | |
|---|---|
| UNSPSC 21.0 | 31261500 |

## Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |

China RoHS

| | |
|---|---|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|---|---|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |


Phoenix Contact 2024 © - all rights reserved
https://www.phoenixcontact.com



Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com

# Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

## PHOENIX CONTACT:

1052015:0051 1418790 1585760 1967249 3100240 3260068 1843677 1411283 1857028 3030349
0828736 1405233 5442235 1706196 1844808 2940359 3200674 3210981 0201139 1660397 1751516
3240926 5031171 1719341 1837395 1886595 1608100 1873757 2908729 3244643