
PJQ5562A

60V N-Channel Enhancement Mode MOSFET

Voltage	60 V	Current	83 A

DFN5060-8L





Features

- $R_{DS(ON)}$, V_{GS}@10V, I_D@20A<5.9mΩ
- $R_{DS(ON)}$, V_{GS}@4.5V, I_D@10A<9.5mΩ
- Excellent FOM
- Logic Level Drive
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case : DFN5060-8L Package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.08 grams

Maximum Ratings and Thermal Characteristics (T_A=25°C unless otherwise noted)

PARAMETER		SYMBOL	LIMIT	UNITS
Drain-Source Voltage		V_{DS}	60	V
Gate-Source Voltage		V_{GS}	±20	
Continuous Drain Current(Note 3)	T_C=25°C	I_D	83	A
	T_C=100°C		53	
Pulsed Drain Current(Note 1)	T_C=25°C	I_{DM}	332	
Power Dissipation	T_C=25°C	P_D	69	W
	T_C=100°C		28	
Continuous Drain Current(Note 4)	T_A=25°C	I_D	16.6	A
	T_A=70°C		13.3	
Power Dissipation	T_A=25°C	P_D	2.8	W
	T_A=70°C		1.8	
Single Pulse Avalanche Current(Note 5)		I_{AS}	26	A
Single Pulse Avalanche Energy(Note 5)		E_{AS}	62	mJ
Operating Junction and Storage Temperature Range		T_J,T_{STG}	-55~150	°C
Thermal Resistance(Note 4)	Junction to Case	$R_{\theta JC}$	1.8	°C/W
	Junction to Ambient	$R_{\theta JA}$	45	

PJQ5562A

Electrical Characteristics (T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Static						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}=0V, I_D=250uA	60	-	-	V
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}=V_{GS}, I_D=250uA	1.5	2.1	3	
Drain-Source On-State Resistance	$R_{DS(on)}$	V_{GS}=10V, I_D=20A	-	4.7	5.9	mΩ
		V_{GS}=4.5V, I_D=10A	-	7.3	9.5	
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=60V, V_{GS}=0V	-	-	1	uA
Gate-Source Leakage Current	I_{GSS}	V_{GS}=±20V, V_{DS}=0V	-	-	±100	nA
Dynamic(Note 6)						
Total Gate Charge	Q_g	V_{DS}=30V, I_D=20A, V_{GS}=10V	-	40	52	nC
Gate-Source Charge	Q_{gs}		-	9.6	-	
Gate-Drain Charge	Q_{gd}		-	8.3	-	
Input Capacitance	Ciss	V_{DS}=30V, V_{GS}=0V, f=1MHz	-	2039	2650	pF
Output Capacitance	Coss		-	695	973	
Reverse Transfer Capacitance	Crss		-	91	-	
Gate resistance	R_g	f=1MHz	-	0.88	-	Ω
Turn-On Delay Time	$td_{(on)}$	V_{DS}=30V, I_D=20A, V_{GS}=10V, R_G=3Ω (Note 2)	-	9	-	ns
Turn-On Rise Time	t_r		-	35	-	
Turn-Off Delay Time	$td_{(off)}$		-	29	-	
Turn-Off Fall Time	t_f		-	59	-	
Drain-Source Diode						
Diode Forward Current	I_S	T_C=25°C	-	-	83	A
Pulsed Diode Forward Current	I_{SM}		-	-	332	
Diode Forward Voltage	V_{SD}	I_S=20A, V_{GS}=0V	-	0.8	1.3	V
Reverse Recovery Time	Trr	V_{DD}=30V,V_{GS}=0V	-	37	-	ns
Reverse Recovery Charge	Qrr	I_S=20A,dI_S/dt=100A/us	-	18	-	nC

NOTES :

1. Pulse width≤100us, Duty cycle≤2%.
2. Essentially independent of operating temperature typical characteristics.
3. Chip capability with an $R_{\theta JC}$=1.8°C/W.
4. $R_{\theta JA}$ is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. Mounted on a 1 inch^2 with 2oz.square pad of copper.
5. E_{AS} is calculated based on the condition of L=1mH, I_{AS}=11A, V_{DD}=30V, V_{GS}=10V. 100% test at L=0.1mH, I_{AS}=26A in production.
6. Guaranteed by design, not subject to production testing.

PJQ5562A

TYPICAL CHARACTERISTIC CURVES

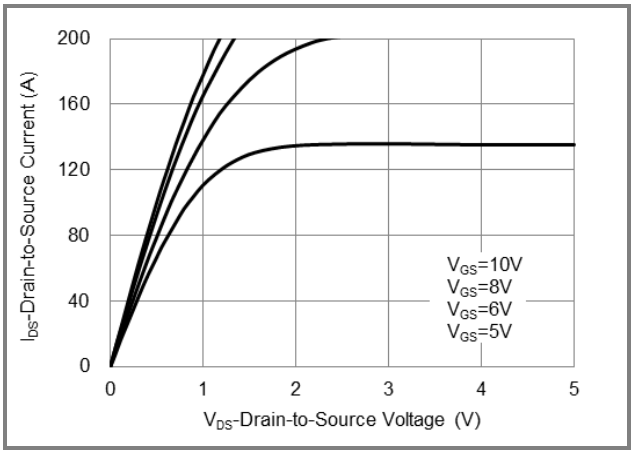


Fig.1 On-Region Characteristics

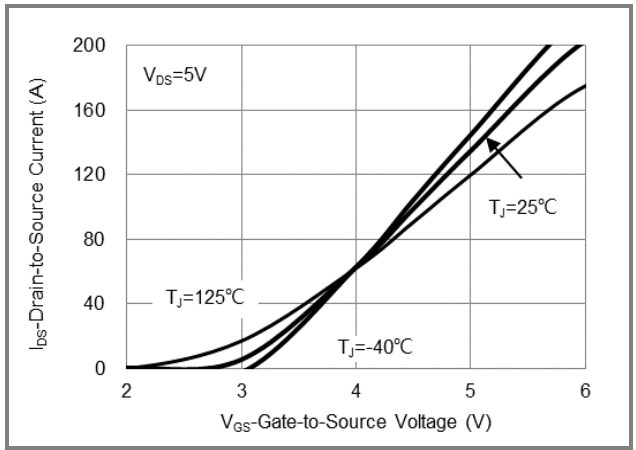


Fig.2 Transfer Characteristics

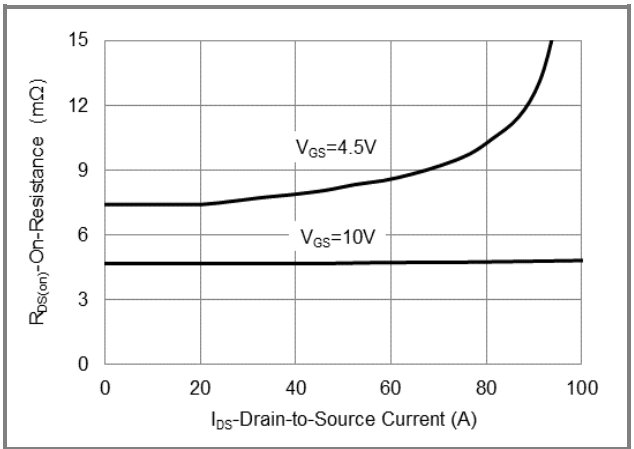


Fig.3 On-Resistance vs. Drain Current

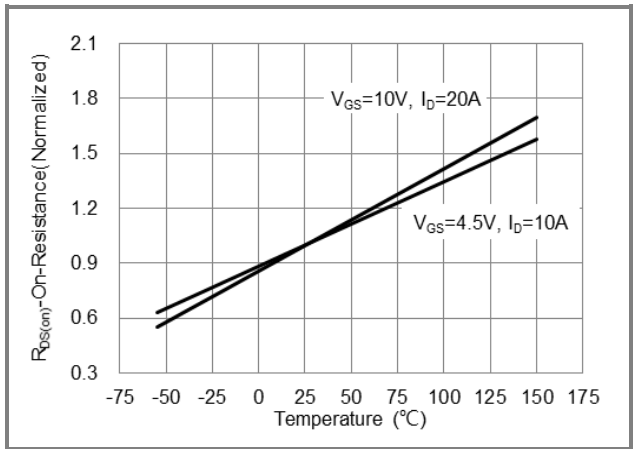


Fig.4 On-Resistance vs. Junction temperature

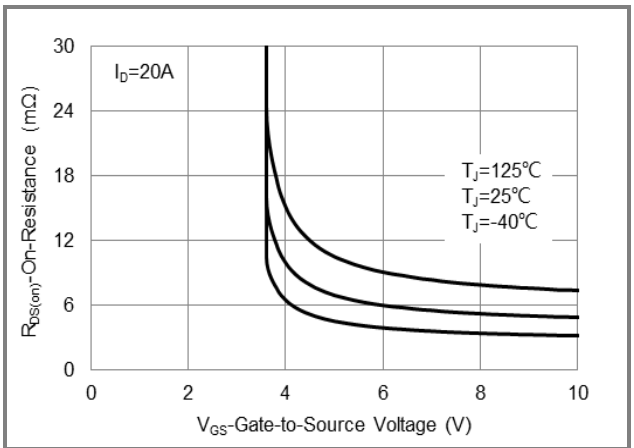


Fig.5 On-Resistance Variation with V_{GS}

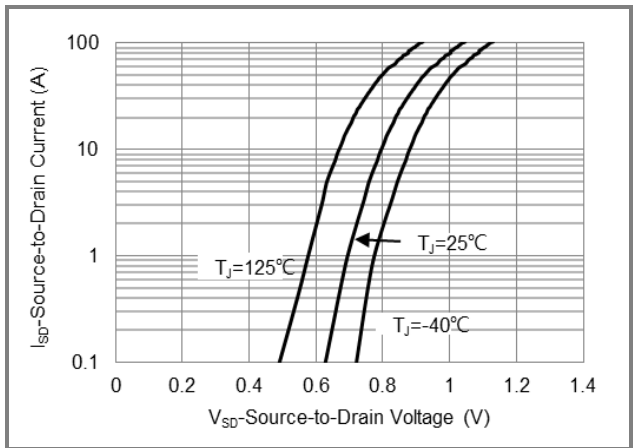


Fig.6 Source-Drain Diode Forward Voltage

PJQ5562A

TYPICAL CHARACTERISTIC CURVES

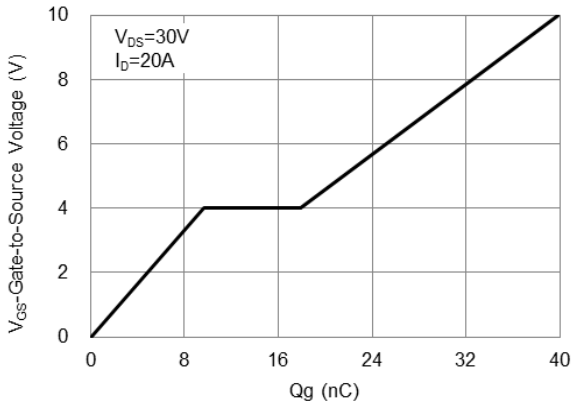


Fig.7 Gate-Charge Characteristics

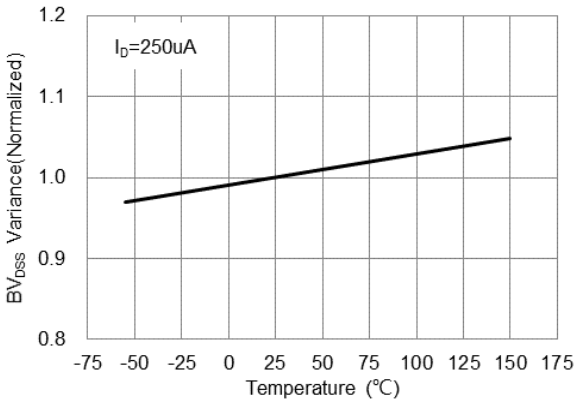


Fig.8 Breakdown Voltage Variation vs. Temperature

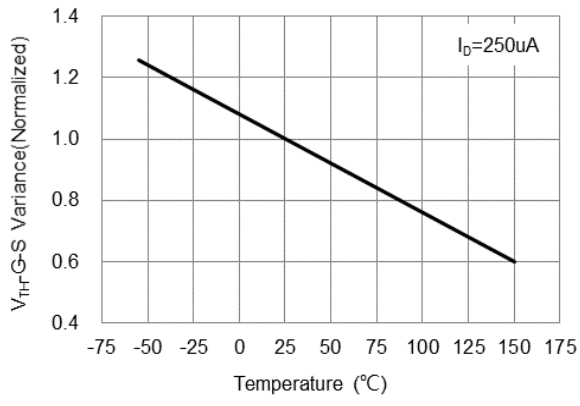


Fig.9 Threshold Voltage Variation with Temperature

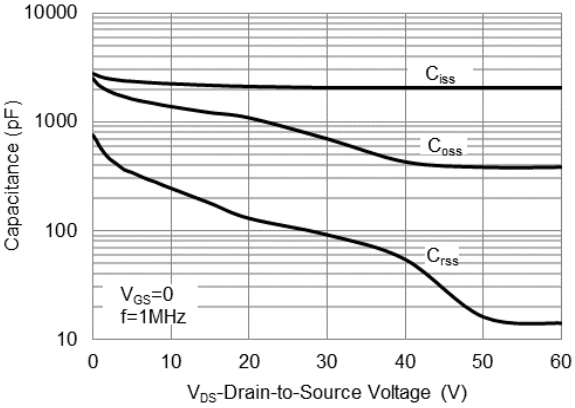


Fig.10 Capacitance vs. Drain-Source Voltage

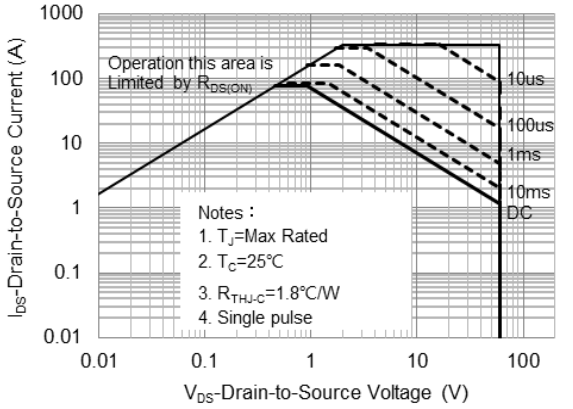


Fig.11 Maximum Safe Operating Area

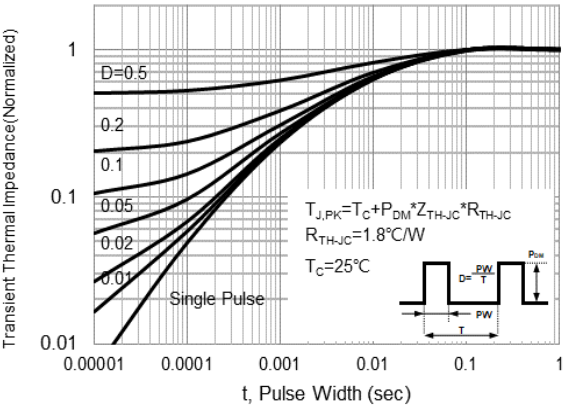


Fig.12 Normalized Transient Thermal Impedance


PJQ5562A

Product and Packing Information


Part No.	Package Type	Packing Type	Marking
PJQ5562A	DFN5060-8L	3K pcs / 13” reel	Q5562A

Packaging Information & Mounting Pad Layout

DFN5060-8L Dimension — Unit: inch(mm)

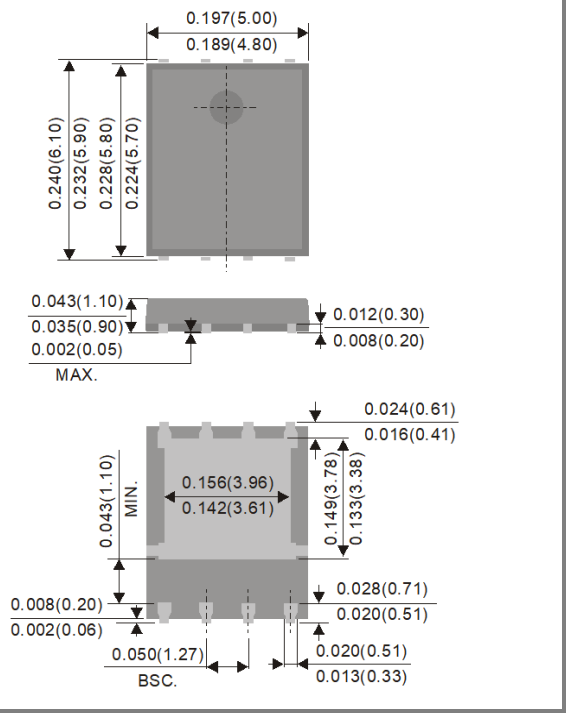

DFN5060-8L Pad Layout — Unit: inch(mm)

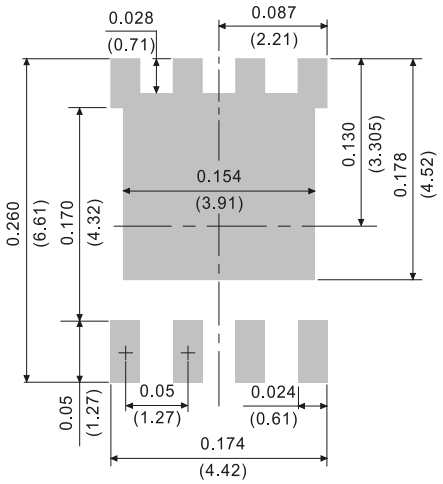

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

PANJIT:

BAT750_R1_00001 BZT52-B8V2S_R1_00001 PJSD24TS-AU_R1_000A1 BAV70_R1_00101 MMSZ5248B_R1_00001 P6SMBJ10A_R1_00001 BZT52B12S_R1_00001 S1G_R2_00001 SB34AFC-AU_R1_000A1 SS20100FL_R1_00001 UF808_T0_00001 BAV99_R1_00001 BSS8402DW_R1_00001 GS1M_R1_10001 P6SMB75A_R3_00001 PSDH6060CCS1_T0_00001 ZMM55-C43_R1_10001 P4FL6.5A_R1_00001 ER2004CT_TO_00001 P4SMAJ180A_R1_00001 PSDB1560L1_T0_00001 S3JA_R2_00001 SB34AFC_R1_00001 BZT52-B27S GS1010FL-LE_R1_00001 MMSZ5242B_R1_00001 MMSZ5245AS_R1_00001 ER2D_R2_00001 S100_R1_00001 SB36AFC-AU_R1_000A1