




RoHS

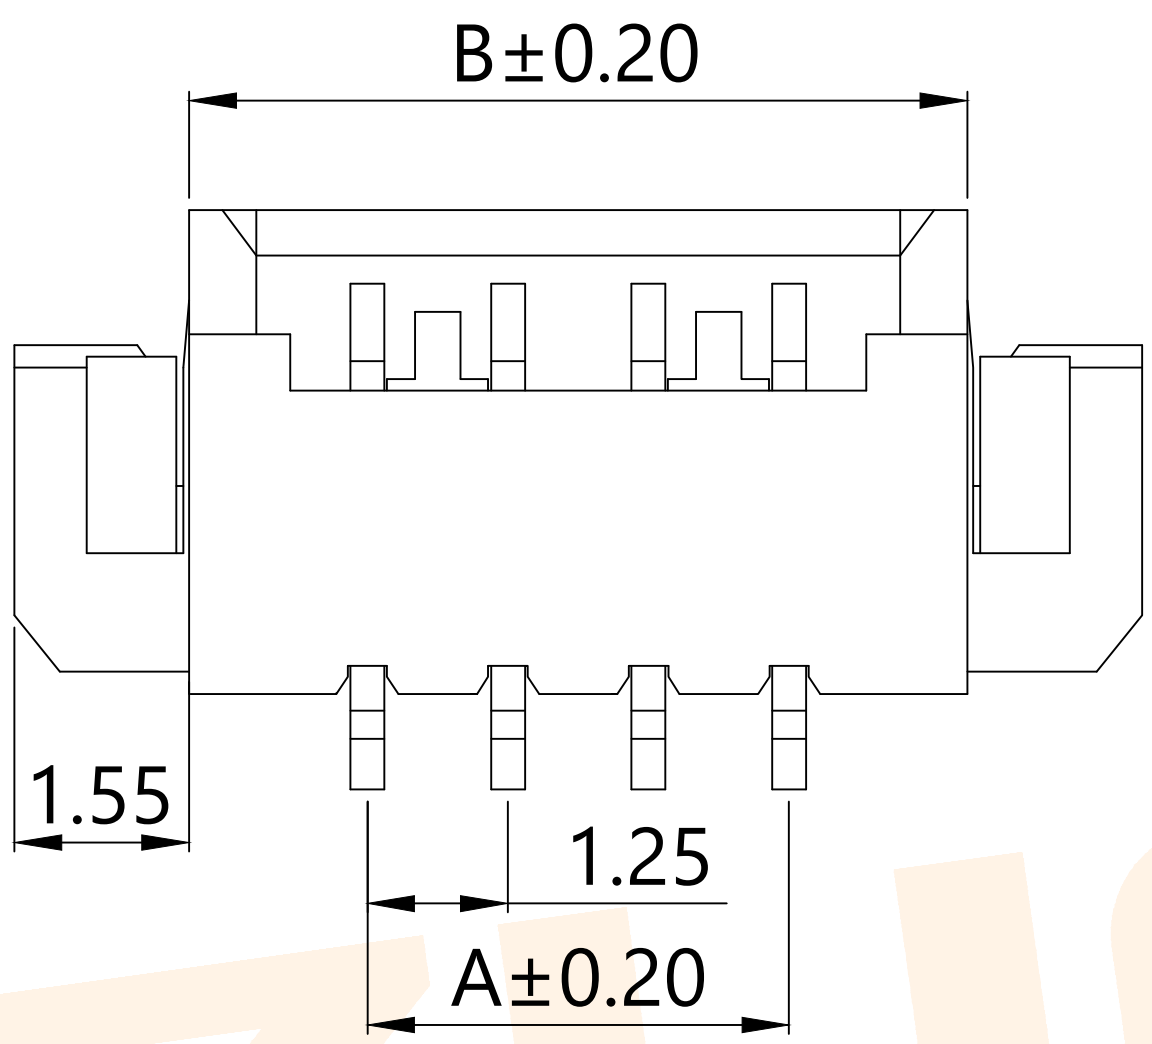

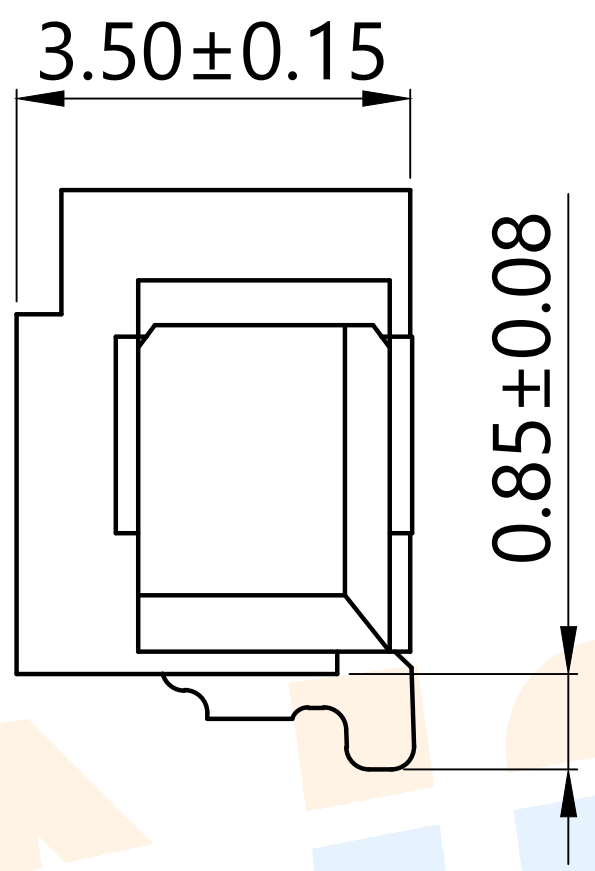

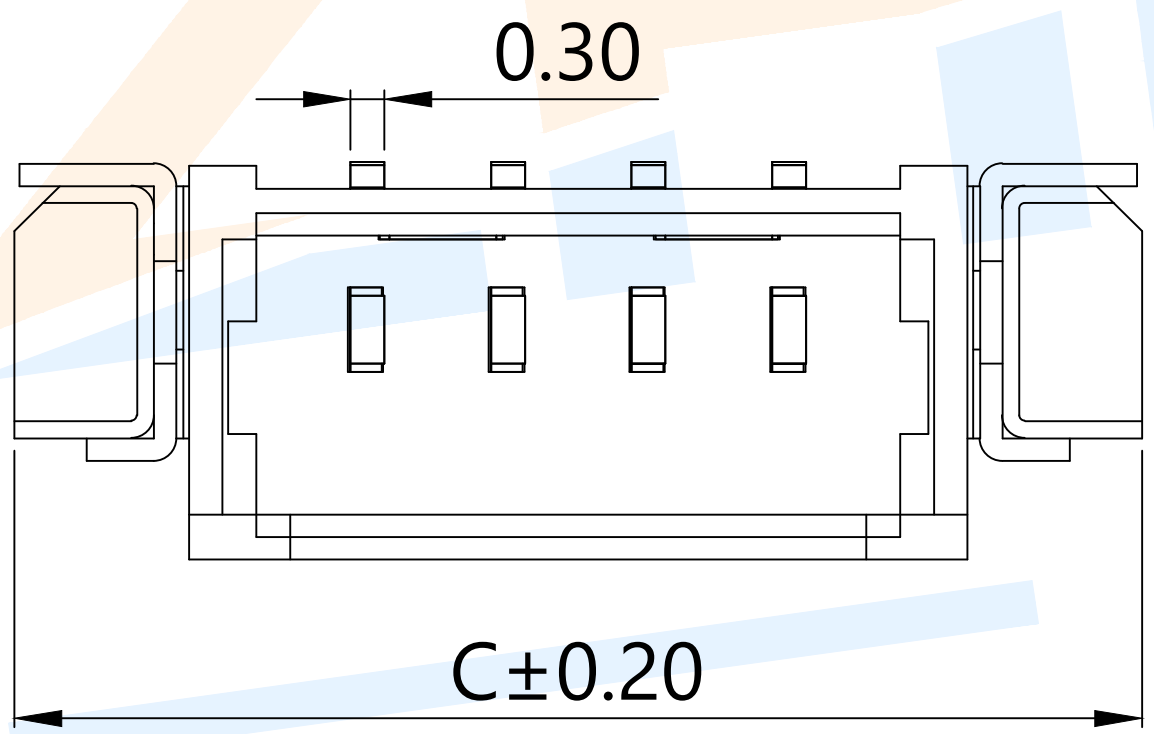

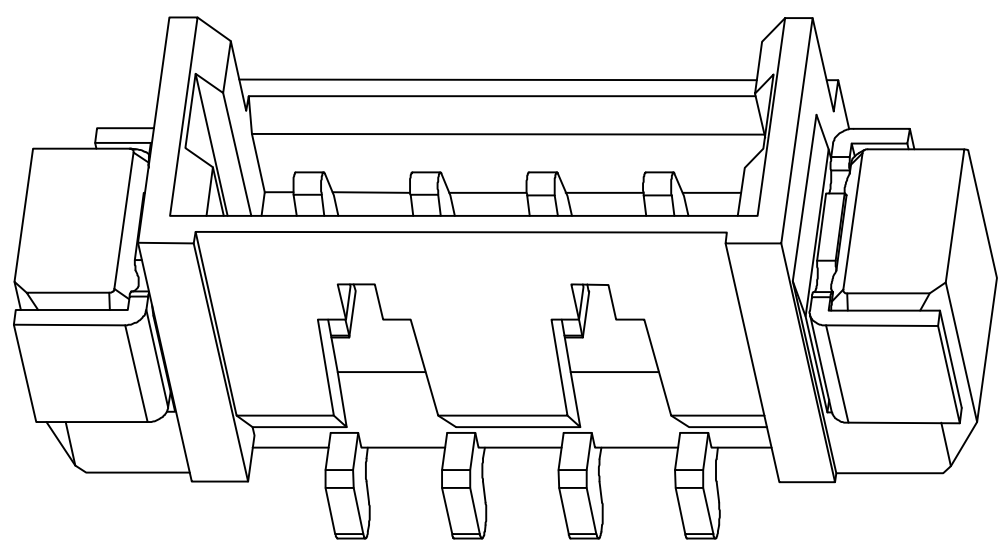

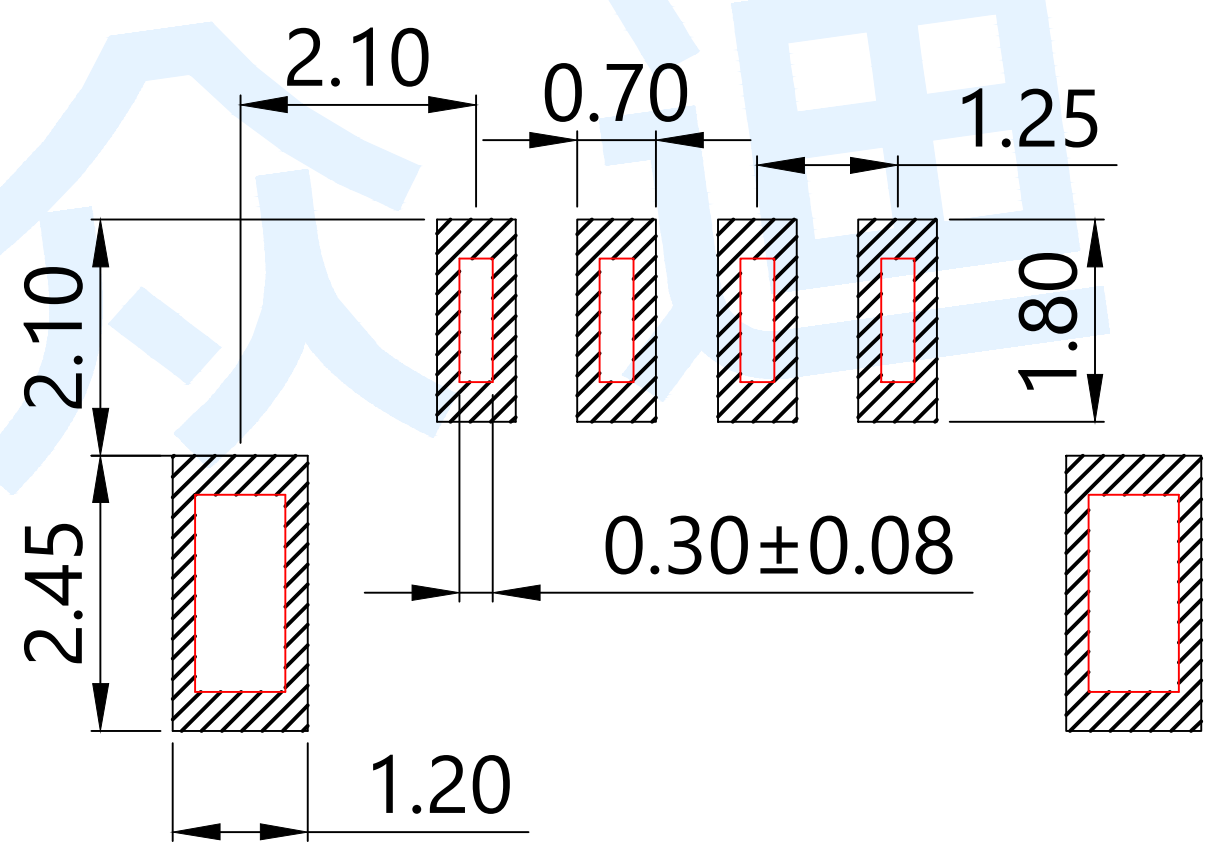

适用线路板(PCB LAYOUT)

Model No.	Pin	A	B	C
WAFER-MX1.25-2PWT-W1	2	1.25	4.42	7.55
WAFER-MX1.25-3PWT-W1	3	2.50	5.67	8.80
WAFER-MX1.25-4PWT-W1	4	3.75	6.92	10.05
WAFER-MX1.25-5PWT-W1	5	5.00	8.17	11.30
WAFER-MX1.25-6PWT-W1	6	6.25	9.42	12.55
WAFER-MX1.25-7PWT-W1	7	7.50	10.67	13.80
WAFER-MX1.25-8PWT-W1	8	8.75	11.92	15.05
WAFER-MX1.25-9PWT-W1	9	10.00	13.17	16.30
WAFER-MX1.25-10PWT-W1	10	11.25	14.42	17.55
WAFER-MX1.25-11PWT-W1	11	12.50	15.67	18.80
WAFER-MX1.25-12PWT-W1	12	13.75	16.92	20.05
WAFER-MX1.25-13PWT-W1	13	15.00	18.17	21.30
WAFER-MX1.25-14PWT-W1	14	16.25	19.42	22.55
WAFER-MX1.25-15PWT-W1	15	17.50	20.67	23.80
WAFER-MX1.25-16PWT-W1	16	18.75	21.92	25.05
WAFER-MX1.25-13PWT-W1	17	20.00	23.17	26.30
WAFER-MX1.25-14PWT-W1	18	21.25	24.42	27.55
WAFER-MX1.25-15PWT-W1	19	22.50	25.67	28.80
WAFER-MX1.25-16PWT-W1	20	23.75	26.92	30.05
WAFER-MX1.25-□□PWT-W1(-P=盘装,非盘装不启用)				

Specifications/技术规格:

1.Poles/线数：2～20P
2.Wire range/适用线规：AGW 32#～28#
3.Applicable PC board thickness/适用PC板厚度：0.6～1.2mm
4.Current rating/额定电流：1.0A
5.Voltage rating/额定电压：125V DC/AC
6.Insulation Resistance/绝缘电阻：100MΩ Min
7.Dielectric Withstanding/ 耐电压：500V AC/minute
8.Contact Resistance/ 接触电阻：20mΩ Max
9.Operating Temperature/ 工作温度：-25℃ to +85℃

NO.	Name	Number	Qty	Materil	Remarks
Ⓒ	Soldering lug		1	Brass	Plating Sn
Ⓑ	Terminal			Brass	Plating Sn
Ⓐ	Housing		1	LCP	Off White

ZHONGDI® 众迪 Zhongdi Electronic Technology Co., Ltd

Tolerance not specified	
angle	±2°
10~30	±0.30
5~10	±0.20
~ 5	±0.10

modify | Review | Approved

design		date		name	WAFER CONNECTOR
Review		date			
Approved		date		model	WAFER-MX1.25-□□PWT-W1

Drawing number:

Proportion 1:1 | unit mm | gape number | A4

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ZHONGDI:

WAFER-TJC8-2.54-2PWZ WAFER-ZH1.5-2PWT-W1-P WAFER-ZH1.5-4PLT-W1-P
WAFER-PH2.0-2PWT-W1-P WAFER-HY2.0-4PWT-W1-P WAFER-HY2.0-6PWT-W1-P
WAFER-SH1.0-11PLT-W1-P WAFER-SH1.0-6PWT-W1-P WAFER-SUR0.8-4PLT-W1-P
WAFER-XH2.54-12PWT-W1-P WAFER-ZH1.5-12PWT-W1-P WAFER-ZH1.5-2PLT-W1-P
WAFER-MX1.25-2PWZ-C22-9T WAFER-MX1.25-4PWZ-C22-9T WAFER-SH1.0-8PWT-W1-P
WAFER-VH3.96-5PWT-W1-P WAFER-HY2.0-6PLT-W1-P WAFER-SUR0.8-14PWT-W1-P
WAFER-VH3.96-3PWT-W1-P WAFER-XHB2.54-7PWT-W1-P WAFER-GH1.25-14PWT-W1-P
WAFER-HY2.0-7PWT-W1-P WAFER-MX1.25-5PZZ-C22-9T WAFER-SHB1.0-8PWT-W1-P
WAFER-SUR0.8-12PWT-W1-P WAFER-HY2.0-10PWT-W1-P WAFER-MX1.25-5PLT-W1-P
WAFER-GH1.25-12PLT-W1-P WAFER-TJC8-2.54-12PZZ WAFER-SHB1.0-13PLT-W1-P