
■ Package Dimensions :

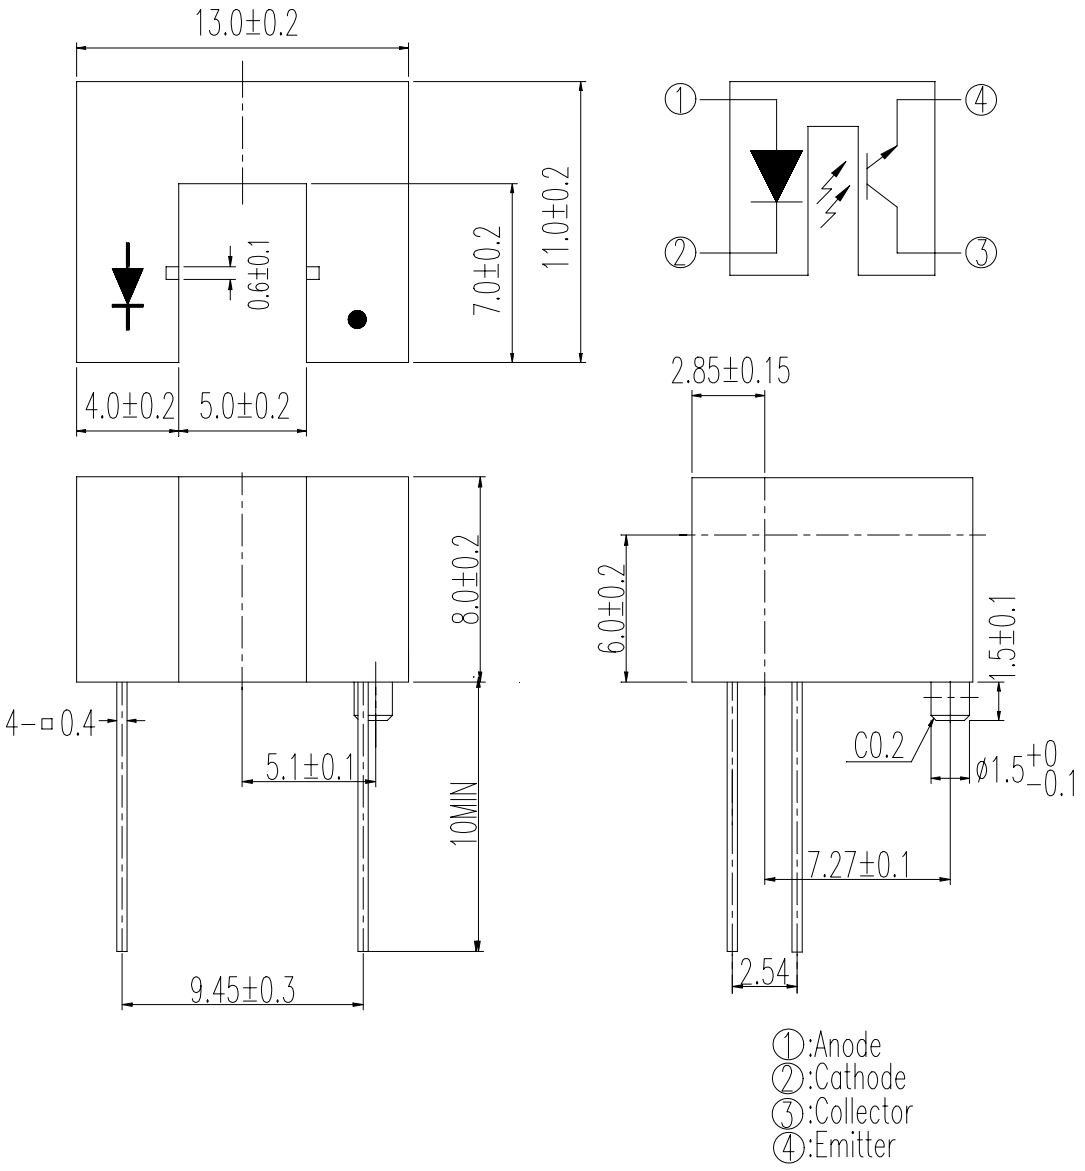

Unit:mm

DESIGNER	CHECKER	APPROVED

Office: NO 25,Lane 76,Chung Yang Rd,,Sec.3
Tucheng, Taipei 236,Taiwan, R.O.C.
TEL: 886-2-2267-2000,2267-9936(22Lines)
FAX: 886-2-2267-6189

Downloaded from Arrow.com.

◎**Notes**：

1.All dimensions are in millimeter.
2.General Tolerance:±0.2mm
3.Lead spacing is measured where the lead emerge from the package.
4.Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
5.These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
6.When using this product , please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.

■ Descriptions:

The ITR9809/T (Slot Optical Switch) is a gallium arsenide infrared emitting diode which is coupled with a silicon photo transistor in a plastic housing. The packaging system is designed to optimizes the mechanical resolution, coupling efficiency, and insulates ambient light. The slot in the housing a provides a means of interrupting the signal with printer, scanner, copier, or other opaque material, switching the output from an " ON" to" OFF" state.

■ Features:

- Wide gap between light emitter and detector(5.0mm)
- High sensing accuracy
- PWB mounting type package
- Pb free
- The product itself will remain within RoHS compliant version.

■ Applications:

- Copier
- Printer
- Facsimile
- Ticket vending machine
- Opto-electronic switch

Downloaded from Arrow.com.

■ Absolute Maximum Ratings (Ta=25℃)

Parameter		Symbol	Ratings	Unit
Input	Power Dissipation at(or below) 25℃ Free Air Temperature	Pd	75	mW
	Reverse Voltage	V_R	5	V
	Forward Current	I_F	50	mA
	Peak Forward Current Pulse width ≦100μs, Duty cycle=1%	I_{FP}	1	A
Output	Collector Power Dissipation	P_C	75	mW
	Collector Current	I_C	20	mA
	Collector-Emitter Voltage	V_{CEO}	30	V
	Emitter-Collector Voltage	V_{ECO}	5	V
Operating Temperature		Topr	-25~+85	℃
Storage Temperature		Tstg	-40~+85	℃
Lead Soldering Temperature (1/16 inch from body for 5 seconds)		Tsol	260	℃

■ Electro-Optical Characteristics (Ta=25℃)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Condition
Input	Forward Voltage	V_F	-	1.2	1.5	V	I_F=20mA
	Reverse Current	I_R	-	-	10	μA	V_R=5V
	Peak Wavelength	λ_P	-	940	-	nm	I_F=20mA
Output	Collector Dark Current	I_{CEO}	-	-	100	nA	V_{CE}=20V Ee=0mW/cm^2
Transfer Characteristic	C-E Saturation Voltage	V_{CE}(sat)	-	-	0.4	V	I_C=0.5mA Ee=10mW/cm^2
	Collector Current	I_C(ON)	1.0	2.0	10.0	mA	V_{CE}=5V I_F=20mA
	Rise time	t_r	-	20	-	μsec	V_{CE}=5V
	Fall time	t_f	-	20	-	μsec	I_C=1mA R_L=1KΩ

Downloaded from Arrow.com.

Typical Characteristics For IR

Fig. 1 Forward Current vs. Ambient Temperature

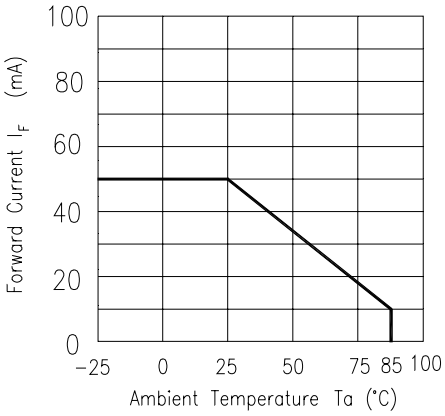


Fig. 2 Spectral Distribution

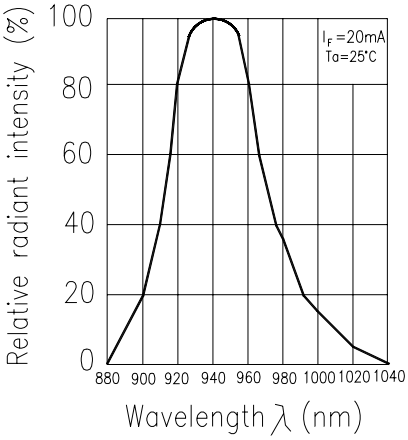


Fig. 3 Peak Emission Wavelength vs. Ambient Temperature

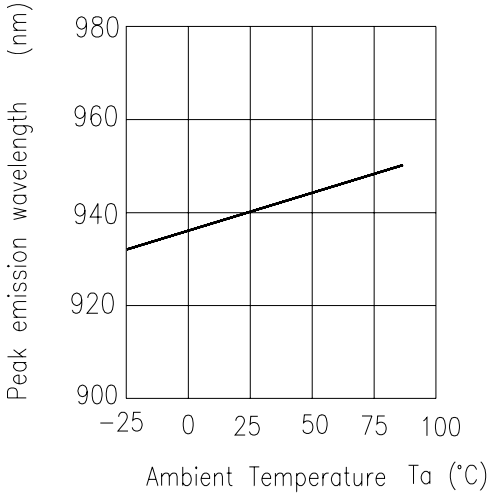


Fig. 4 Forward Current vs. Forward Voltage

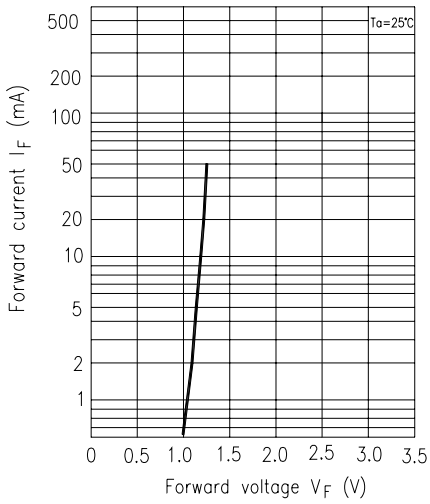


Fig. 5 Forward Voltage vs. Ambient Temperature


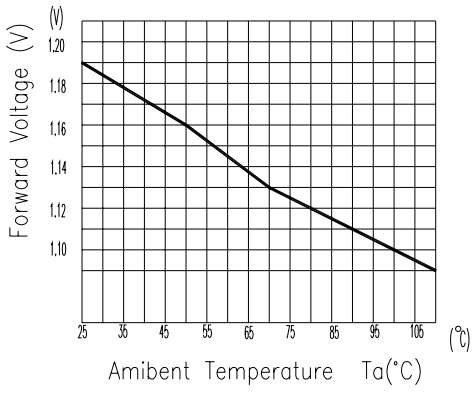


Fig. 6 Relative Radiant Intensity vs Angular Displacement

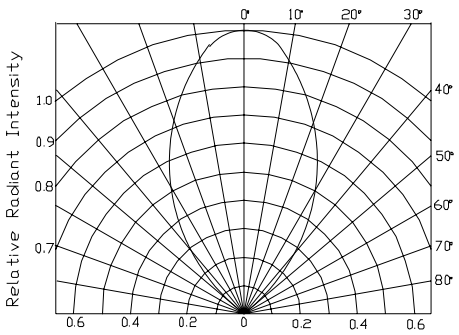

Downloaded from Arrow.com.

■Typical Characteristics For PT

Fig.1 Collector Power Dissipation vs. Ambient Temperature

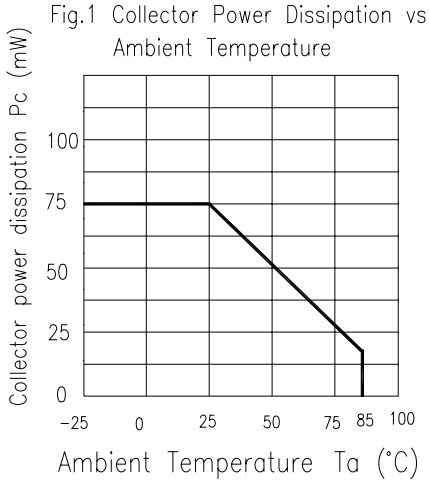


Fig.2 Collector Dark Current vs. Ambient Temperature

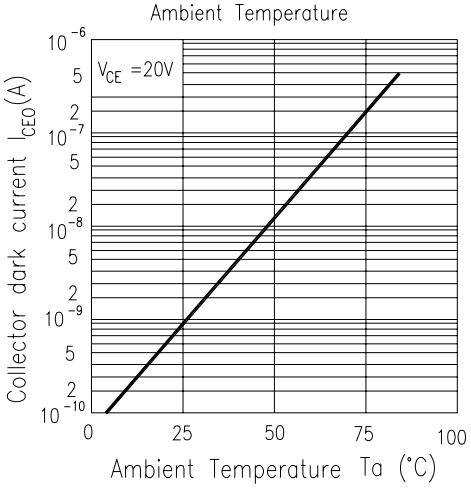


Fig.3 Spectral Sensitivity


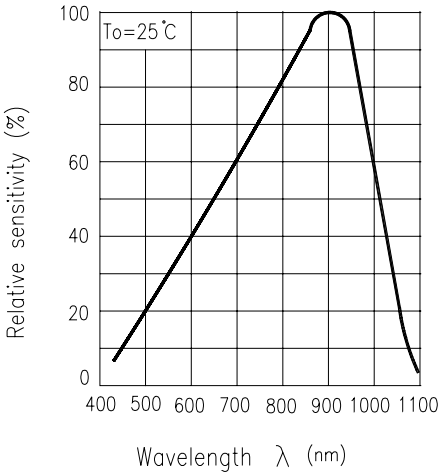


Fig.4 Collector Current vs. Collector−emitter Voltage

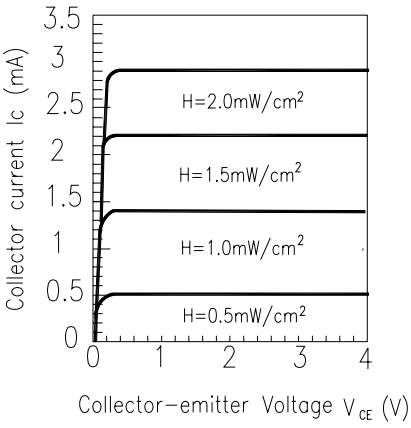

■Typical Characteristics For ITR

Fig.1 Relative Collector Current vs. Shield Distance(1)


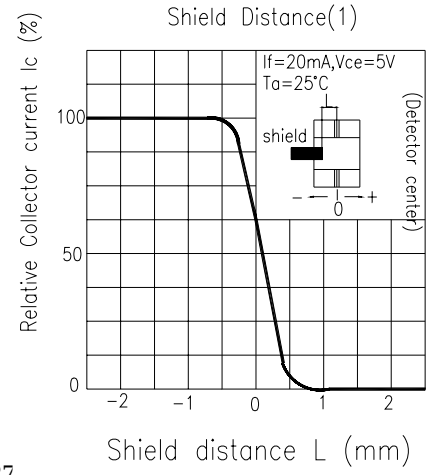


Fig.2 Relative Collector Current vs. Shield Distance(2)

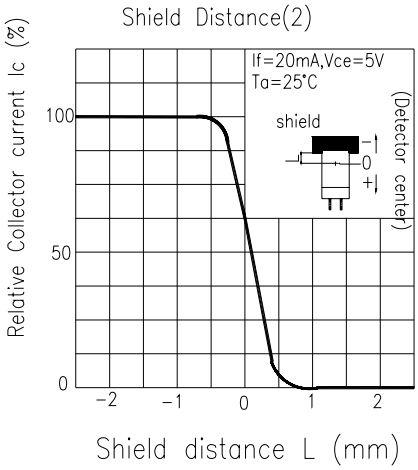

Downloaded from Arrow.com.

■Reliability test item and condition

The reliability of products shall be satisfied with item listed below:

Confidence level :90% LTPD:10%

Parameter	Purpose & Condition	Failure Judgement Criteria	Samples(n) Defective(c)
Temperature Cycle	Evaluates product's ability to withstand exposure to high temperature, low temperature, and temperature variation between two limit temperature. Standard test Condition: 85℃~25℃~-55℃~25℃ ↓ ↓ ↓ ↓ 30min 5min 30min 5min 50 cycle	$I_R \geqq U \times 2$ $Ic(on) \leqq L \times 0.8$ $V_F \geqq U \times 1.2$ U：Upper specification limit L：Lower specification limit	n =22，c=0
Thermal Shock	Evaluates product's ability to withstand rapid temperature change Standard test Condition: 85℃ ~ -55℃ 5min 5min 50cycle		n =22，c=0
High Temperature Storage	Evaluates product's ability to withstand prolonged storage at high temperature Standard test Condition: Temperature : 100 ℃ Time : 1000hrs		n =22，c=0
Low Temperature Storage	Evaluates product's ability to withstand prolonged storage at low temperature Standard test Condition: Temperature : -55 ℃		n =22，c=0

Downloaded from Arrow.com.

	Time : 1000hrs		

Parameter	Purpose & Condition	Failure Judgement Criteria	Samples(n) Defective(c)
Operating Life Test	Evaluates product's endurance to prolonged electrical or temperature stresses. Standard test Condition: V_{CE}=5V I_F=20mA Time : 1000hrs	$I_R \geqq U \times 2$ $Ic(on) \leqq L \times 0.8$ $V_F \geqq U \times 1.2$ U：Upper specification limit L：Lower specification limit	n =22，c=0
High Temperature High Humidity	Evaluates product's ability to withstand prolonged storage at high temperature and high humidity. Standard test Condition: Temperature: 85℃ Relative humidity:85% Time : 1000hrs		n =22，c=0
Soldering Heat	Evaluates product's ability to withstand soldering heat Standard test conditions Solder temperature : 260±5℃ Solder time : 10 seconds		n =22，c=0

■Supplements

1.Parts

(1) Chip

Type	Material	Peak Wavelength
IR	GaAs	940 nm
PT	Silicon	860 nm


(2)Material

Type	Lead frame	Wire	Part Package	Holder
Material	SPCC	Gold	Epoxy	PRO


■Packing Specifications

Downloaded from Arrow.com.


1. Bag

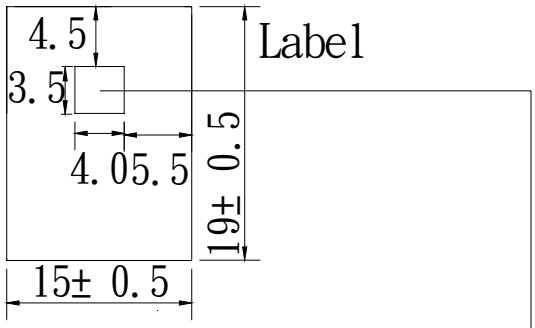

2. Box

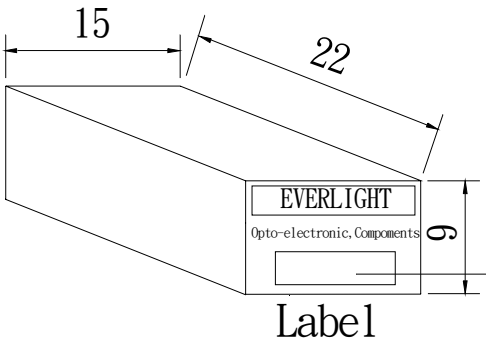

3. Carton

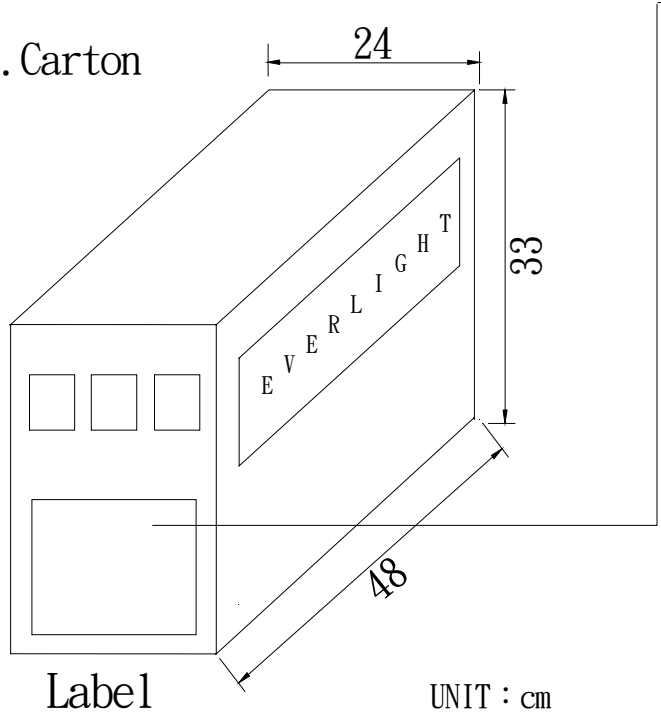

UNIT：cm



CPN : Customer's Product Number
P/N : Product Number
QTY : Packing Quantity
CAT : Ranks
HUE : Peak Wavelength
REF : Reference
LOT NO : Lot Number
MADE IN TAIWAN : Production place

■Packing Quantity Specification

1.150Pcs/1Bag，4Bags/1Box

2.10Boxes/1Carton

Downloaded from Arrow.com.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

EVERLIGHT:

EL817S2(C)(TU)-FG H11L1S(TA) PD204-6B/L3 ITR1205ST11A/TR 12-21SURC/S530-A2/TR8
19-213/Y2C-CN1P2B/5T 27-21/GHC-YR1S2M/3C EL357N(B)(TA)-VG IR968-8P(X1-X4)XBY
EL357N(A)(TA)-G 12-215/BHC-ZK1L2B18X/3C 12-215SYGC/S530-E1/TR8 EL3083 ELM406A(TA)-G
PT334-6B 19-213/Y2C-CQ2R2L/3T(CY) 19-213SURC/S530-A3/5T 45-21UMC/404589E/TR8-T
ELM440A(TA)(BMS)-VG 19-21SURC/S530-A2/4T IR1503 6N137S(TA) IRM-3638JF
11-21SURC/S530-A2/3T CNY17-2 EL3H7(B)(TA)-VG IR383-A 15-21/BHC-AP1Q2/3T
ALS-PDIC15-21C/L230/TR8 ALS-PDT243-3C/L451