
THIS DRAWING IS A CONTROLLED DOCUMENT.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE PER ECO-14-009836	07-01-14	DM	DM

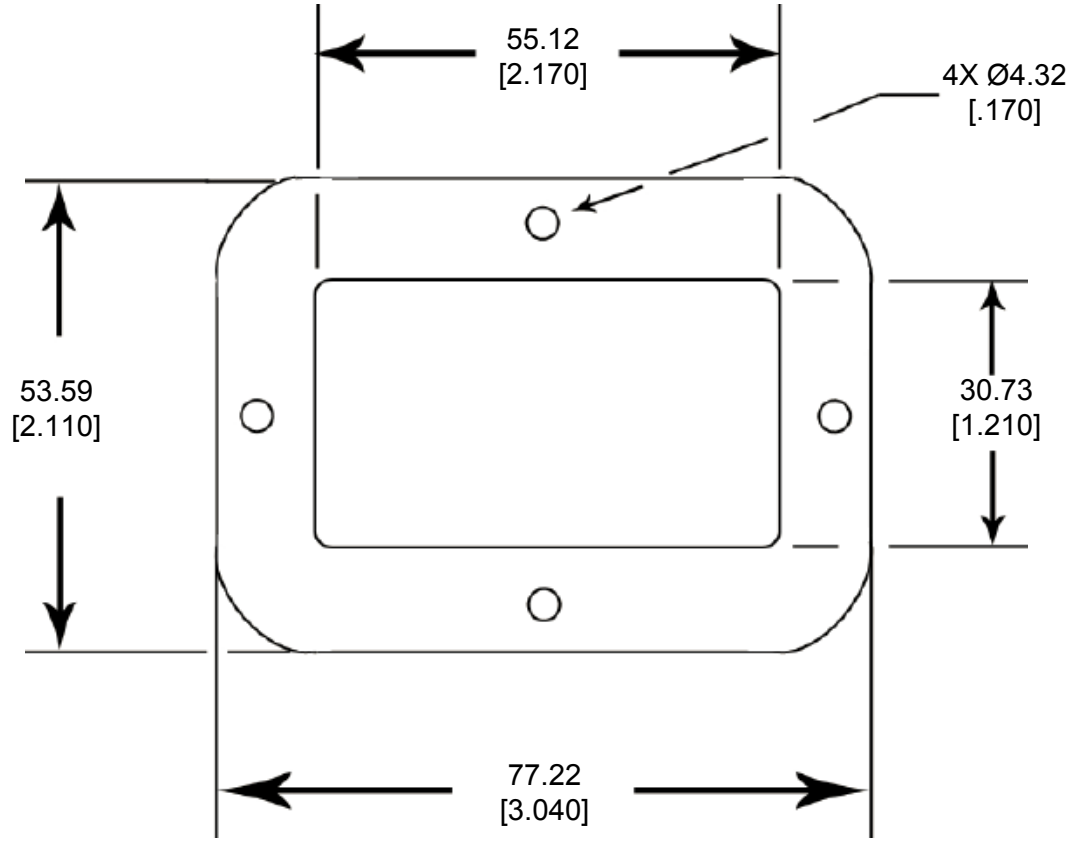

4. PART NO. DRC24-GKT-AD

3. THICKNESS: 3.18 [.125]

2. TEMPERATURE RATING: -57°C TO +107°C [-70°F TO +225°F]

1. THIS PART IS USED ON
DRC12-24PX(E)-XXXX RECEPTACLE
WHERE X=A,B,C,D KEYS AND XXXX=MODIFICATION

THIS DRAWING IS UNPUBLISHED. © COPYRIGHT 2014 BY TE CONNECTIVITY ALL RIGHTS RESERVED.
RELEASED FOR PUBLICATION 2014

DIMENSIONS: MM [INCH]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ± 0.63 [.025]
3 PLC ±
4 PLC ±
ANGLES ±5°

DWN D. MEYER 01JUL2014
CHK D. HASIBUAN 01JUL2014
APVD D. MEYER 01JUL2014
PRODUCT SPEC
APPLICATION SPEC
WEIGHT .907 G

MATERIAL CLD CELL SPONGE
FINISH BLACK

TE Connectivity

NAME GASKET, ADHESIVE, RECEPTACLE, 24PIN
DRC SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A4	4AFU8	C DRC24-GKT-AD	-

Customer Drawing

SCALE NONE SHEET 1 OF 1 REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:
DRC24-GKT-AD