
ROHS

http://www.smtswitch.com

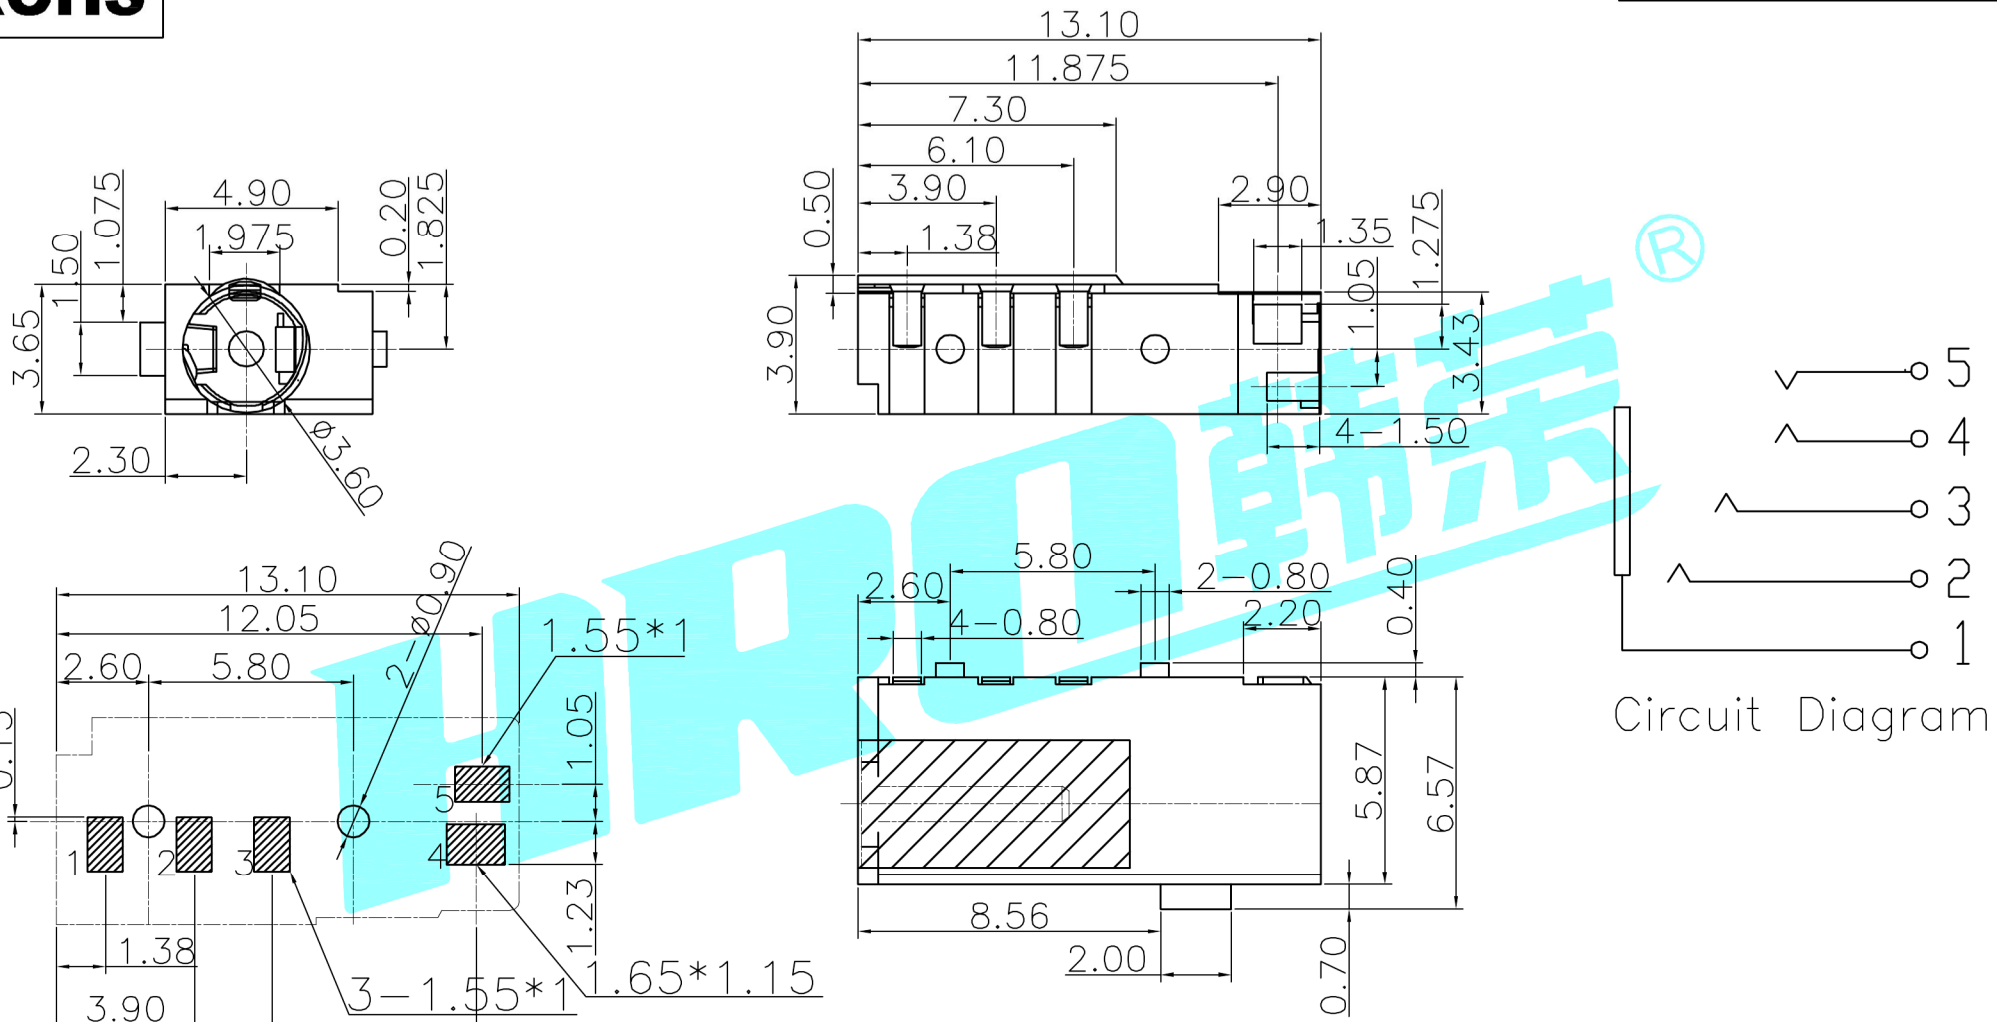

P C B Layout(Top view)

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

②	Shunt terminal	———	5	Phosphor bronze	Plating Au	———
①	Housing	———	1	PPA	Black	———
ITEM	PART NAME	Serial number	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	HRO韩荣® ELECTRONICS CO.,LTD
DRAWN	xu qi feng	2014.11.28	
CHECKED			TITLE: PHONE JACKES
APPROVALS			PART NO. PJ-610
TOLERANCES ARE: 30~以下 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~5 ±0.10; ANGLE ±2°			UNIT: mm / SCALE: 1:1 / PROJ: / DRAWING NO. ——— / SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
———	A	———	NEW	———	———	———

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

K2-1101DF-A4DW-01 TYPE-C-31-M-04 K8-5851D-L1 PJ-399B-6A K2-1102DP-S3SW-04 K5-1617SA-01 U-F-M5DD-Y-L U-F-M5DD-Y-L1 SS-22D03-G4 U-C-M5SS-Y-1 U-F-M5SS-W-5 DC-031A-10A K2-1102SP-A5SC-04 K3-1346S-F1 PJ-3250-5A SIM-08A ES-07KP K2-1818DP-A3SW-01 U-M-M5DD-W-2 DA-10RP DQ-03BP K2-1102DP-G4SW-04 K2-1102SP-K4SC-04 K3-2258S-E1 U-C-M5DW-W-1 U-F-M5DS-Y-1 DS-01BP K2-1102AT-A4CW-01 K2-1102BG-I4CW-01 U-F-M5DD-W-L