


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/24/09	–	INITIAL RELEASE



RECOMMENDED
CABLE STRIPPING DIM'S

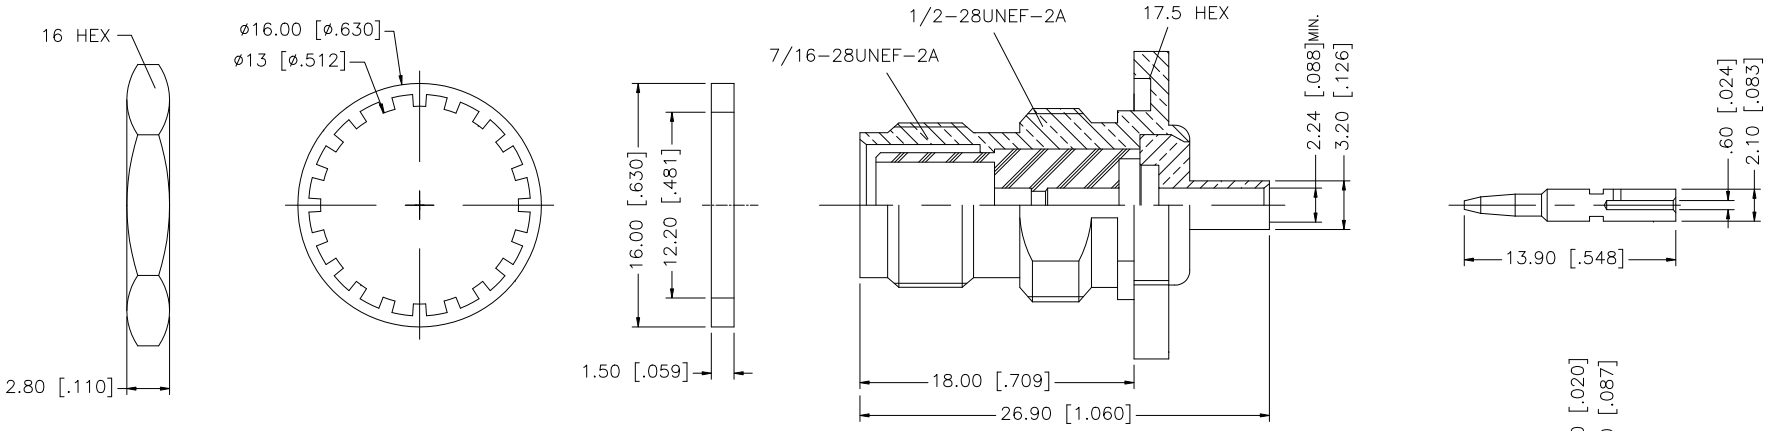



RECOMMENDED
MOUNTING HOLE

NOTE:

1. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.73]
2. MAX. PANEL THICKNESS= 3.5mm

	DESCRIPTION	MATERIAL	FINISH	QTY
8	HEX NUT	BRASS	NICKEL	1
7	LOCK WASHER	BRASS	NICKEL	1
6	GASKET	RUBBER	RED	1
5	INSULATOR	PTFE	NATURAL	1
4	CONTACT PIN	BRASS	GOLD	1
3	INSULATOR	PTFE	NATURAL	1
2	BARREL	BRASS	NICKEL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN GRS	03/24/09
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/122/122400RP–10.DWG

Amphenol Connex

PART DESCRIPTION
TNC REVERSE POLARITY BULKHEAD
DIRECT SOLDER JACK (FOR .085", .086" CABLE)

PART NO. 122400RP–10

DWG. NO.	REV.	SIZE	SCALE
122400RP–10.DWG	NC	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

76384-316LF D15P13A6RV12LF 54202-S08-07LF 863013A CD15S13E4RV09LF 70218-1116LF 86093488314745V1LF 86093968191755E3LF DEM09P032N 54202-G0805CLF 67996-204HLF 68001-108HLF 70234-112LF 86093967896755LF 86093968813H45V1LF 86130202123355E1LF RJE061661210 65781-158 68000-236HLF 91614-403ALF 95157-140LF LD25S33E4GV00LF 68002116HLF 69192-408HLF DAPO15S365TLF DCMF37P LD15P33E4GV00LF RJSBE5080C2 70430-164LF 68001-200HLF