

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT – By – TE CONNECTIVITY ALL RIGHTS RESERVED.


LOC	DIST
HB	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REMOVED THE RIB ON THE BASE TO CASE ECO-15-011310	03DEC2015	YS.H	CHL

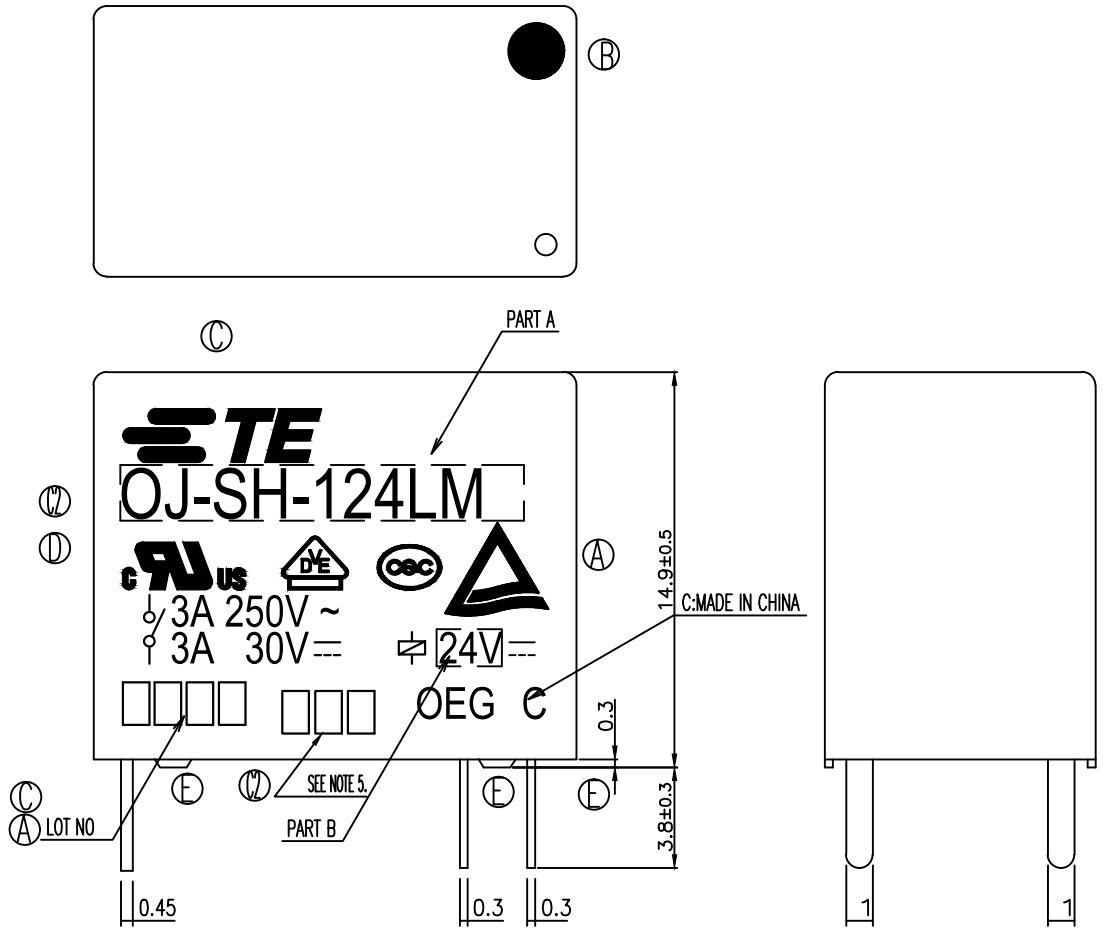

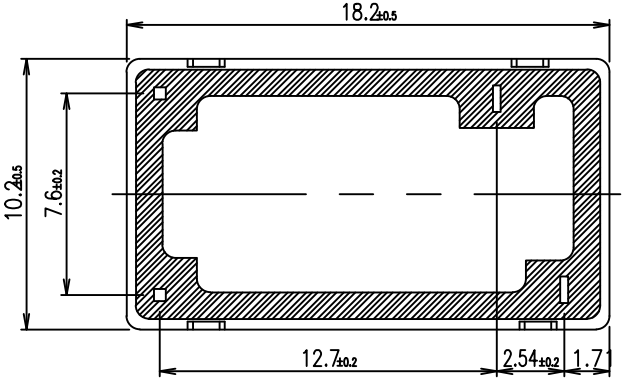

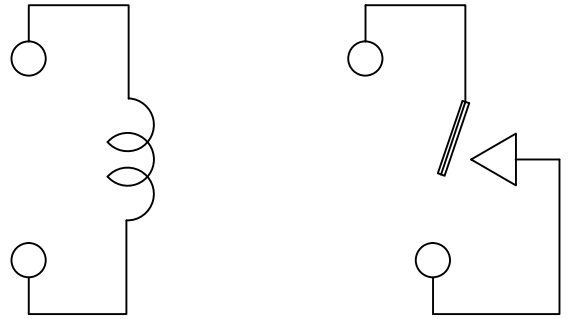

CONNECTION FIGURE

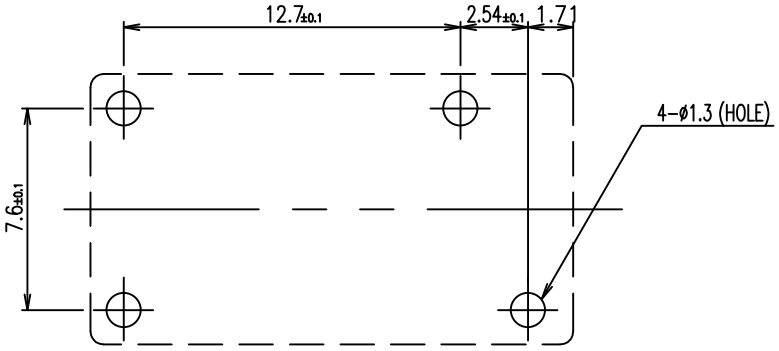


FIGURE FOR PRINTED CIRCUIT BOARD PROCESSING
(BOTTOM VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±–
1 PLC ±–
2 PLC ±–
3 PLC ±–
4 PLC ±–
ANGLES ±–

MATERIAL –

FINISH –

DWN	H.Sasaki
CHK	Y.Oikawa
APVD	A.Nagai
PRODUCT SPEC	—
APPLICATION SPEC	—
WEIGHT	–

TE Connectivity

NAME
–
OJ-SH-LM SPEC,000 CUSTOMER DRAWING
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C- 1461404	—

CUSTOMER DRAWING	SCALE 5:1	SHEET 1 OF 2	REV E

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.- .
© COPYRIGHT – By – TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST
HB	–

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	–	–

TE CONNECTIVITY PART NUMBER	TE CONNECTIVITY TYPE NAME	PACKAGE SPEC,	PART B	PART A	TYPE
1461404-4	OJ-SH-124LM, 000	107-79010	24V	OJ-SH-124LM	f
1461404-6	OJ-SH-112LM, 000	107-79010	12V	OJ-SH-112LM	e
1461404-3	OJ-SH-109LM, 000	107-79010	9V	OJ-SH-109LM	d
1461404-2	OJ-SH-106LM, 000	107-79010	6V	OJ-SH-106LM	c
1461404-1	OJ-SH-105LM, 000	107-79010	5V	OJ-SH-105LM	b
1461404-5	OJ-SH-103LM, 000	107-79010	3V	OJ-SH-103LM	a

RELAY TYPE

ⒸⒶ NOTE:

1.LOT NO. SYSTEM AS FOLLOWING:

□□ □□

WEEK

YEAR

Ⓒ 2.TERMINAL DIMENSION IS BEFORE SOLDER DIP;

Ⓒ 3.FOR THE TIN-PLATING OF THE PINS:

+0.1mm FOR WIDTH,THICKENSS AND DIAMETER.

+0.5mm FOR LENGTH.

Ⓒ 4.USED WELDED CONTACT&LASER MARKING.

Ⓒ 5.ADD LOT NO. SYSTEM AS FOLLOWING;

1 1 A

I II III

I, DIGITS FOR DAY OF THE WEEK

1...MONDAY IN THIS WEEK;

2...TUESDAY IN THIS WEEK;

.....

7...SUNDAY IN THIS WEEK

II, DIGITS FOR SHIFT OF THE DAY

1...DAY SHIFT IN THIS DAY;

2...NIGHT SHIFT IN THIS DAY;

III, ONE CHARACTER DISTINGUISH THE LINE IDENTITY, SUCH AS: A,B.....Z

INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM
		UV RESIN	SEAL (VENT HOLE)	16
		EPOXY RESIN	SEAL (BASE & BOBBIN)	15
		3UEW	MAGNETIC WIRE	14
94V-0		P.B.T	CASE	13
94V-0		P.B.T	BASE	12
94V-0		P.B.T	BOBBIN	11
	SOLDER DIP	C.P WIRE	COIL TERMINAL	10
94V-0		P.P.S	CARD	9
		Ag	MOVABLE CONTACT	8
		Ag	NO.CONTACT	7
		STEEL	HINGE SPRING	6
	SOLDER DIP	Cu ALLOY	NO.TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
	NIP	STEEL	CORE	3
	NIP	STEEL	ARMATURE	2
	NIP	STEEL	YOKE	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN H.Sasaki
CHK – Y.Oikawa
APVD – A.Nagai
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME –
OJ-SH-LM SPEC,000 CUSTOMER DRAWING
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	Ⓒ– 1461404	–

CUSTOMER DRAWING | SCALE 5:1 | SHEET 2 OF 2 | REV E

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1969656-1 2310537-1 2380312-2 2377783-2 3-1393225-0 936348-1 CPF0402B37K4E1 MPT100C18RF RH73H2A40MKTN ROX05SJ18R 1-962915-1 SBCHE64R7K 2834055-1 141991-2 1743455-2 2-292161-3 3631B101LL 917696-1 U5254-000005-030PA 1-794222-0 650075-000 TE50BR39J 1393431-1 2005330-1 SMW73R0JT 175977-2 1903112-2 3430B2F51RTDF CRGCQ2010J3K3 SBCHE154R7K