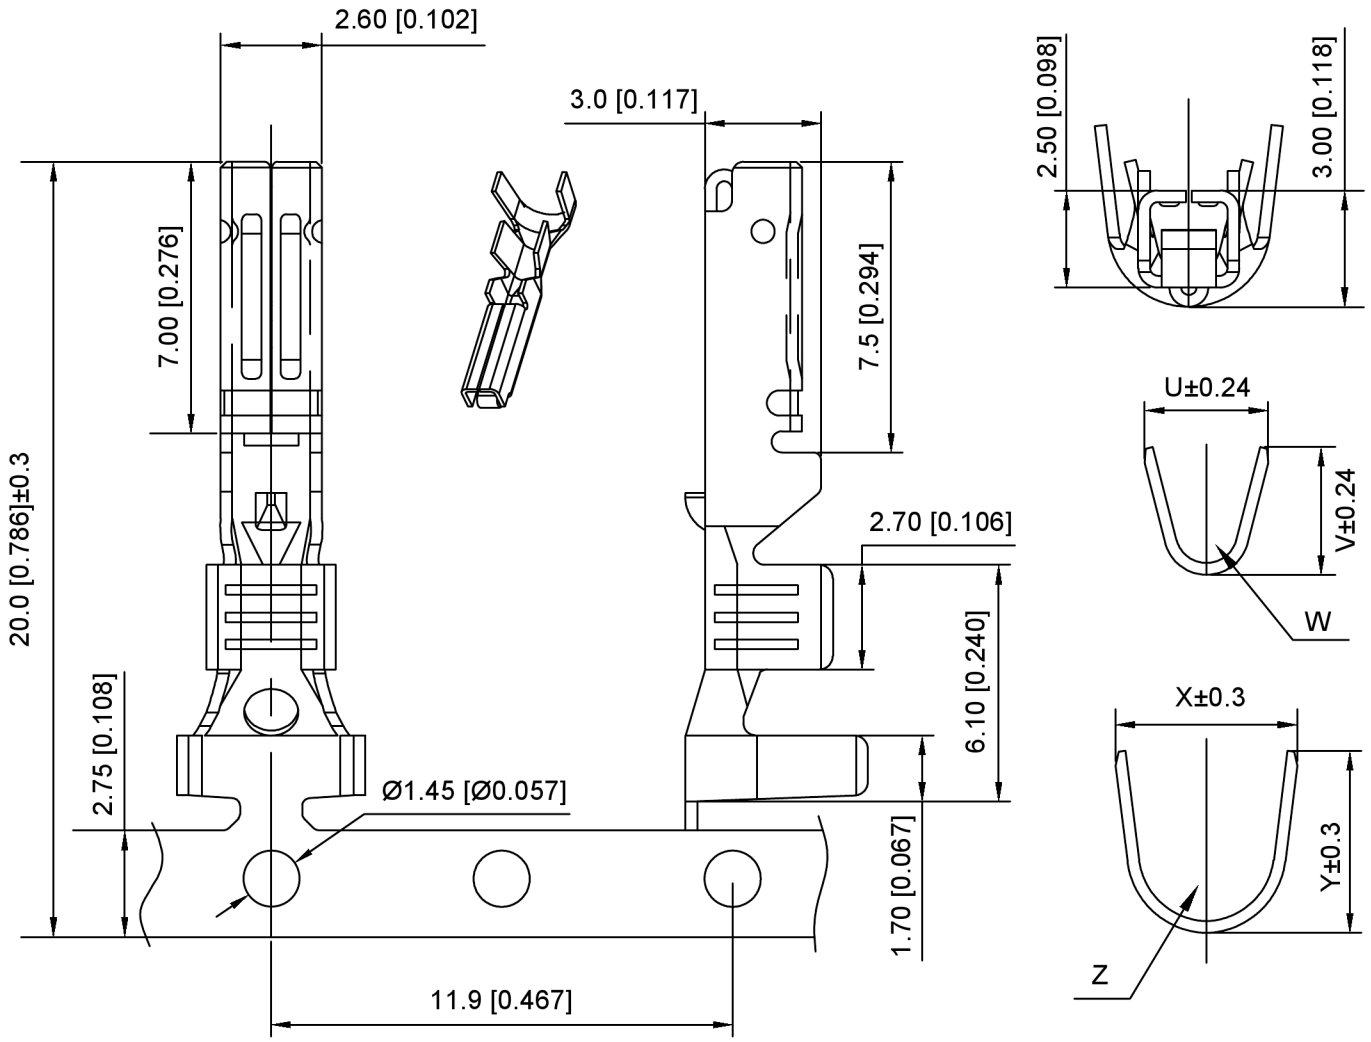


技术说明

1.表明光洁，无明显缩坑与熔接痕

2.Current rating:14A AC/DC

额定电流：14A AC/DC

3.工作温度：-40℃- +125℃

K	282103	T	F	-	P	SN	-	X
①	②	③	④		⑤	⑥		⑦

1.K: XKBTEK-Car Connector
2.XKB Series No
3.Category:T-Terminal
4.Special No:F-Female Terminal
5.Material:P-Phosphor Bronze
6.Plating:SN-Plated Tin
7.Type:H-High foot ; L-Middle foot
M-Low feet

K282103TF-PSN-M	AWG#22-20	2.5	2.3	0.6	4.8	4.7	1.8
K282103TF-PSN-L	AWG#18-15	3.05	3.3	1.2	4.6	4.8	1.8
K282103TF-PSN-H	AWG#15-13	3.6	3.8	1.2	4.8	4.7	1.8
PART N0	Wire Range	U	V	W	X	Y	Z

K282103TF-PSN-X	Phosphor Bronze	K282103HF	K282103D
PART N0	Material	Suitable XKB Female	Suitable XKB Plug

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A	MODEL TYPE: 6.0mm Automobile connector
DWN		VIEW:	PART NO.: K282103TF-PSN-X
CHKD		UNIT: mm/in	DWG NO.: X-K282103TF-PSN-X
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XKB Connection:

X0400WVS-12-LPV01 X4611WR-01I-C40D28 X6511WVS-18H-C60D48-R1 X4611WRS-19I-C40D28 XKSIM-004 X05A26H20G X1502WV-08K-N0SN TS-1102SD-A-R-R X0811FVS-80BS-LPV01 X5521FR-2x02-C70D32-1743 U263-241N-4BQC15 X1304WVS-52B-LPV01 DS-10BLP X0825WT7BL1 X2026WV-2x03-N0SN X1002WRS-04B-9TSN X2011WR-04A-N0SN X8821WVS-04L-LPSN TS-1101VS-C-A-B TM-007-D1-A-04 X1011H-2x25-N0HF X05A26H35G X9812WVS-2x15-6TV01 X1321WVS-2x25J-C40D53 DC-044AE-2.0 DC-030CH-SMT X05A10L10G X0502WVS-20D1S-LPSN U263-161N-5BQC10-1 X05A10L20G