
Inductive proximity switch IFFM 08P1701/O1L

dimension drawing



general data	
mounting type	flush
nominal sensing distance Sn	2 mm
hysteresis	3 ... 20 % of Sr
output indicator	LED red

electrical data	
switching frequency	< 5 kHz
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	12 mA
output circuit	PNP make function (NO)
voltage drop Vd	< 2 VDC
output current	< 200 mA
short circuit protection	yes
reverse polarity protection	yes


mechanical data	
type	rectangular
material (sensing face)	PBT
housing material	die-cast zinc nickel plated
dimension	8 mm
housing length	38,5 mm
connection types	cable, 2 m

ambient conditions	
operating temperature	-25 ... +75 °C
protection class	IP 67

photo



connection diagram

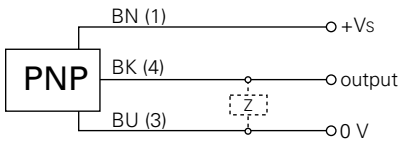

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Baumer:

11190721 MEX3-F21.B29 MTR2-D50.B19 O300.GP-GW1B.72N 11232565 IFFM04N1501/O1L IFRM12N1701/S14L MEX3-F20.B19 MEX5-D31.B38 MIT3-D22.B16 11007902 ARA-10.D30L IFFM08P17A6/L 10127804 EIL580-SC10.5FN.01024.A IFRM 06P17A5/S35L MEX5-D30.B26 MEX5-D31.B79 11130475 MEX5-D30.B24 OR18.ZL-PV1P.7BO/B013 11229489 MEX3-F21.B82 11223791 11112012 FTDR 047A048 LBFS-03421.0 MEX5-F30.B22 MTR1F50B19 O300.TR-ZZZZ.72N