Speaker

pro-SIGNAL


RoHS Compliant




Specifications

Cone Material	: Mylar
Rated Impedance	: 8 ±15%Ω
Nominal Power	: 0.5W
Maximum Power	: 0.8W
Resonant Frequency	: 600 ±25%Hz
Frequency Range	: F 0 - 6,000Hz
Sound Pressure Level at 0.1W/0.1m	: 96 ±3dB
Magnet Material	: Nd-Fe-B
Magnet Size	: 12.5mm × 1.5mm
Operating Temperature	: -20°C to +60°C
Storage Temperature	: -30°C to +60°C
Weight	: 9.2g

Frequency Curve

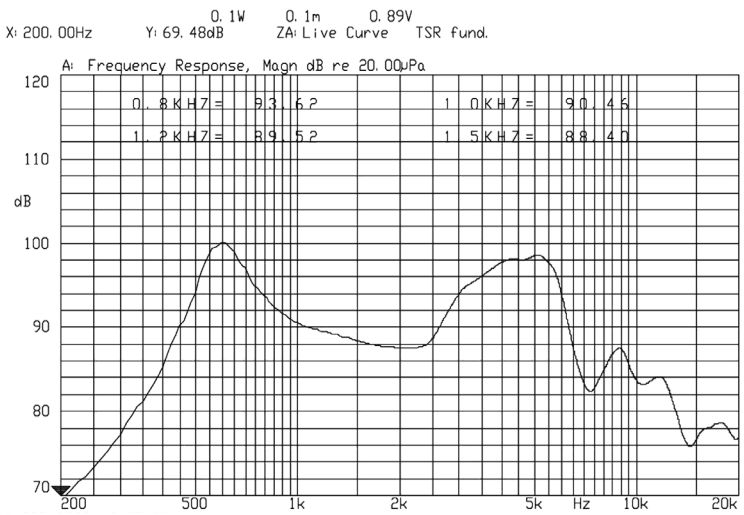

Diagram

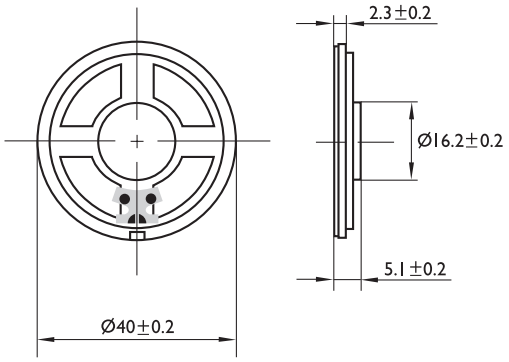

Dimensions : Millimetres

Part Number Table

Description	Part Number
Mylar Speaker, 40mm DIA, 8Ω, 0.8W	ABS-220-RC

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-SIGNAL is the registered trademark of the Group. © Premier Farnell Limited 2016.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

multicomp:

MCMR06X1004FTL MCSR08X3300FTL MUR1540 2213R-24G MP006964 CF06332T/4/10 CMS-DF-1825 MC-SVT1-S06-G MCLPR50V478M30X25 MCMF0W4FF8202A50 MCMR50V335M4X7 MCWF12R7150BTL CFS-TF-1818 MC0603N100J201CT MC34589 MP006937 SMAJ160A-13-F MC0603N100F500CT MCAL0410A1-471KU MCSDRH73B-681MHF MP005415 MC34747 MCMET 800MA 250V MCSDC0603-560KU MCWR08X39R0FTL SPC19989 MC36427 MCMR08X2000FTL MC0402WGF499JTCE MC0603B393K500CT