



由 Autodesk 教育版产品制作

目錄 MAPX	设变内容 MODIFICATION	日期 DATE

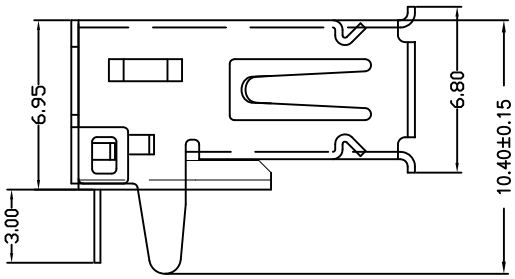

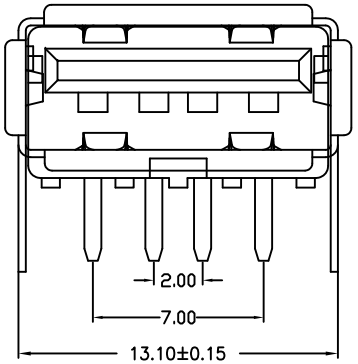

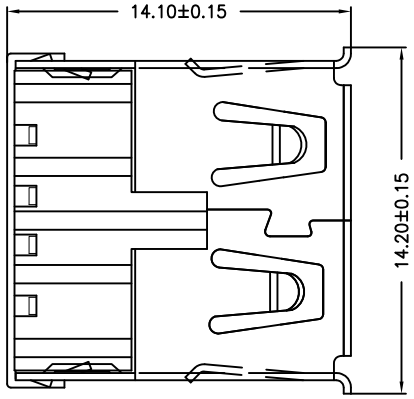

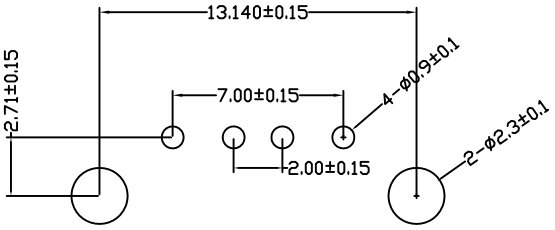

RBCOMMENDBD P.C.B PATTBRN LAYO UT

NOTES:
Housing: Thermoplastics,UL94V-0
Contact: Copper Alloy
Shell: Copper Alloy/Steel
Voltage Current Rating: 1.5 AMP. 30V AC
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 30 MΩ Max.
Dielectric Withstanding Voltage: 500W AC
Temperature Range: -35℃ to +85℃
Insulator color: Black/White
Plastic material: PBT/LCP/Others
Shell finish: Nickel plated/Tin-Lead plated
Mechanical:
Mating Force: 3.5KG MAX
Unmating Force: 0.7 KG MIN.
Contact finish:
01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

备注：侧弹分为外弹与内弹

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X'.	±5'
.X	±0.20	.X'	±2'
.XX	±0.15	.XX'	±1'
.XXX	±0.10	.XXX'	±0.5'

产品图 PRODUCT CHART DWG

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	901-232A1011D10202
比例 SCALE	1:1	审核 CHKD	雷永键	产品名称 PRODUCT NO.	AF90度外扣直脚有边内弹铜壳 短弹T型PBT白胶
日期 DATE	2009/10/20	核准 APPD	雷永键	角法 VIEW	版本 VER: A0

由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

904-232B2032S10100 908-351A1011D10100 910-151A2021D10100 920-A64A2091S101A3
920-F52A2021S10105 904-331B2032S10200 906-552A1012D10200 906-752B1114D10200
907-111A1022D10200 907-312A1101Y10210 911-221A2021S10100 920-154A2021Y10110
920-C62A2021S10103 905-761A2032S10200 917-B88C201AH70201 918-418K2022Y40011
919-162A1012D10400 906-262A1021D10200 918-318K2023C40005 912-312A1012D10100
918-468K2029Y50000 920-A62A2021S10104 920-C52A2021S10105 912-112A2021S10100
916-151A1022Y10200 904-232A2031S10100 912-112A1011D10100 917-P81A202ES60201
918-415K3028S40000 920-A62A2021S10108