

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

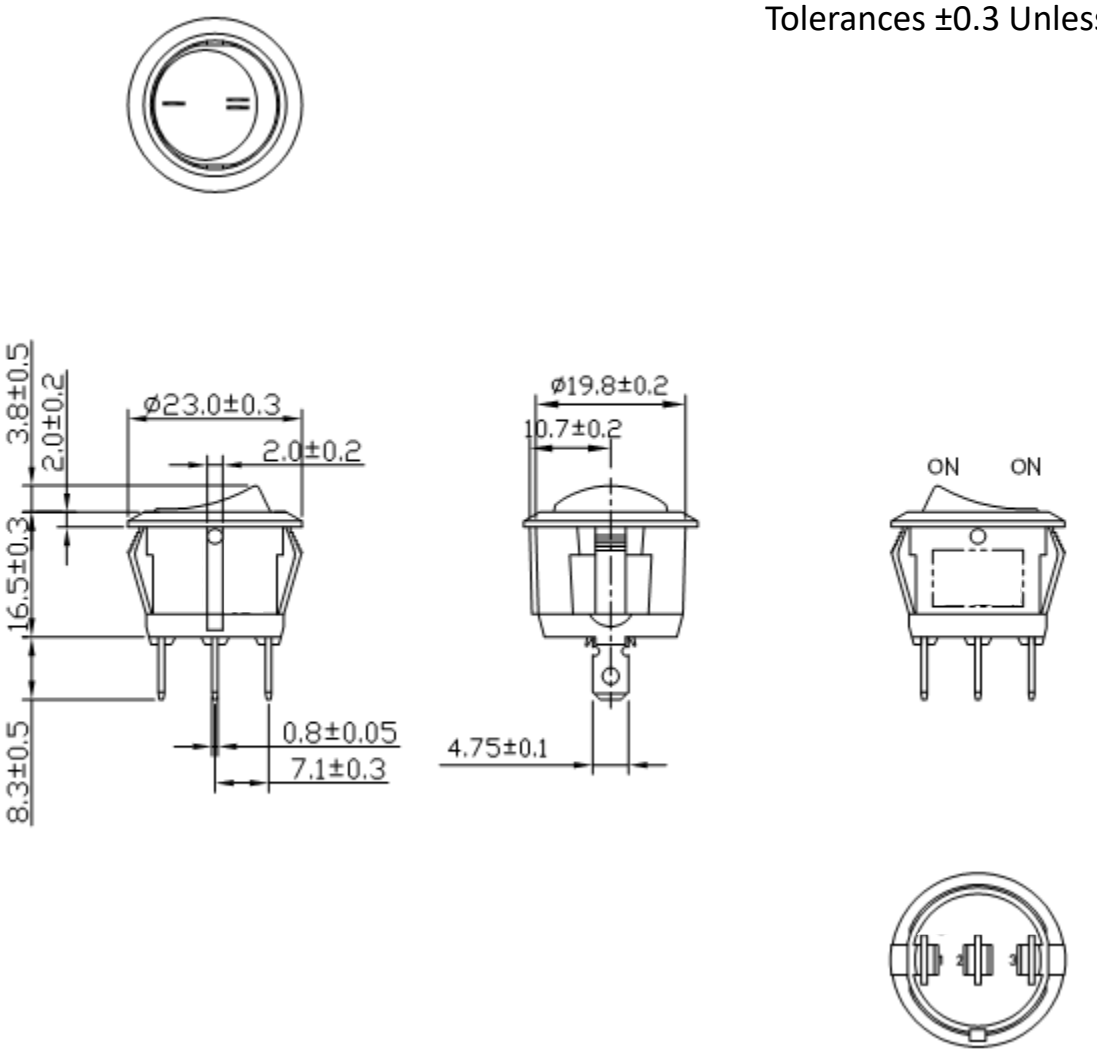


Mounting Hole

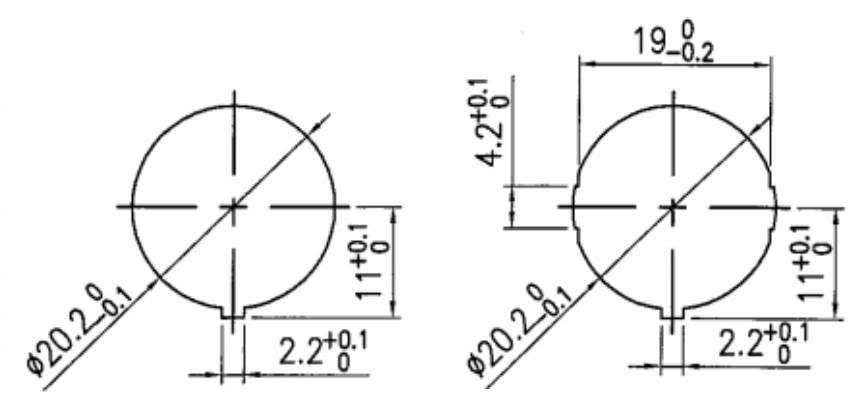

Thickness: 2.0~3.0 Thickness: 0.7~3.0

Circuit Diagram

3P SPDT ON-ON



Electrical Specifications

Rating	20A 14V DC, 10A 28V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Black, Nylon 66
Actuator	Black, Nylon 66
Terminals	Copper alloy, Silver plating
Printed	White, hot stamping

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

SB-1B-DC-3-B SRA1-1A-DC-1-NN-2 SRA1-2F-DC-1-NN TA2-1G-DC-6-O TE3-1A-DC-1-AL PB-1B-DC-2-RIL RC-1A-DC-1-AL RD2-1A-DC-1-AL SRB1-1G-DC-1-NN SRD2-2F-DC-1-BNN TB1-2H-DC-6 TE6-1A-DC-1-UL SC-B TE1-1F-DC-1-PB PB-1A-DC-2-RDL RF1-1A-DC-2-B-3 RF3-1A-DC-2-GL SB-1B-DC-3-R SRC1-1B-DC-1-B SRD1-2A-DC-1-BGN TC6-P1-Z PD-1E-DC-9-UL RA4-2A-DC-2-AL WR1 PB-1A-DC-2-B RG3-1A-DC-1-B SRD2-1G-DC-1-BNN SRD2-2F-DC-1-RNN TA1-1A-DC-4 TA2-1A-DC-5